

RELOADING GUIDE

— FOR CENTERFIRE CARTRIDGES —

2021



VIHTAVUORI®

The Power of Accuracy

THE POWER OF ACCURACY

For almost a hundred years, Vihtavuori powders have formed the heart of many of the world's most renowned cartridges. Reloaders know they can trust in Vihtavuori powder's performance and uniform high quality – cartridge after cartridge – to create a perfect product for successful shooting. When choosing Vihtavuori powders you know your ammo is up to the task, even in the toughest conditions.

Manufacturing propellants entirely in-house ensures their high quality. All Vihtavuori powders are made using nitro-cellulose produced by linters at our own plant. Premium quality Vihtavuori powders deliver consistently flawless firing performance – for you this means reliable reloading and ammunition you demand.


Each stage of the production process is subject to stringent quality control by the Vihtavuori experts to ensure that each production lot has the exact ballistic performance required. Each and every batch produced is inspected by comparing them to selected reference batches.

All Vihtavuori powders for small arms are extruded propellants. Propellant grains are perforated cylinders of various sizes, flat ribbon flakes or other shapes extruded for special applications. The grain geometry of different powder types provides the wanted combustion characteristics for the chosen cartridge application.

The estimated shelf-life of Vihtavuori powders is a minimum of 10 years, if stored and sealed in its original containers at a temperature ca 20 °C and relative humidity of 55 -65%.

All Vihtavuori reloading powders are packed into bottles and canisters and further in cardboard boxes.

Go ahead, take Vihtavuori and make the perfect shot.

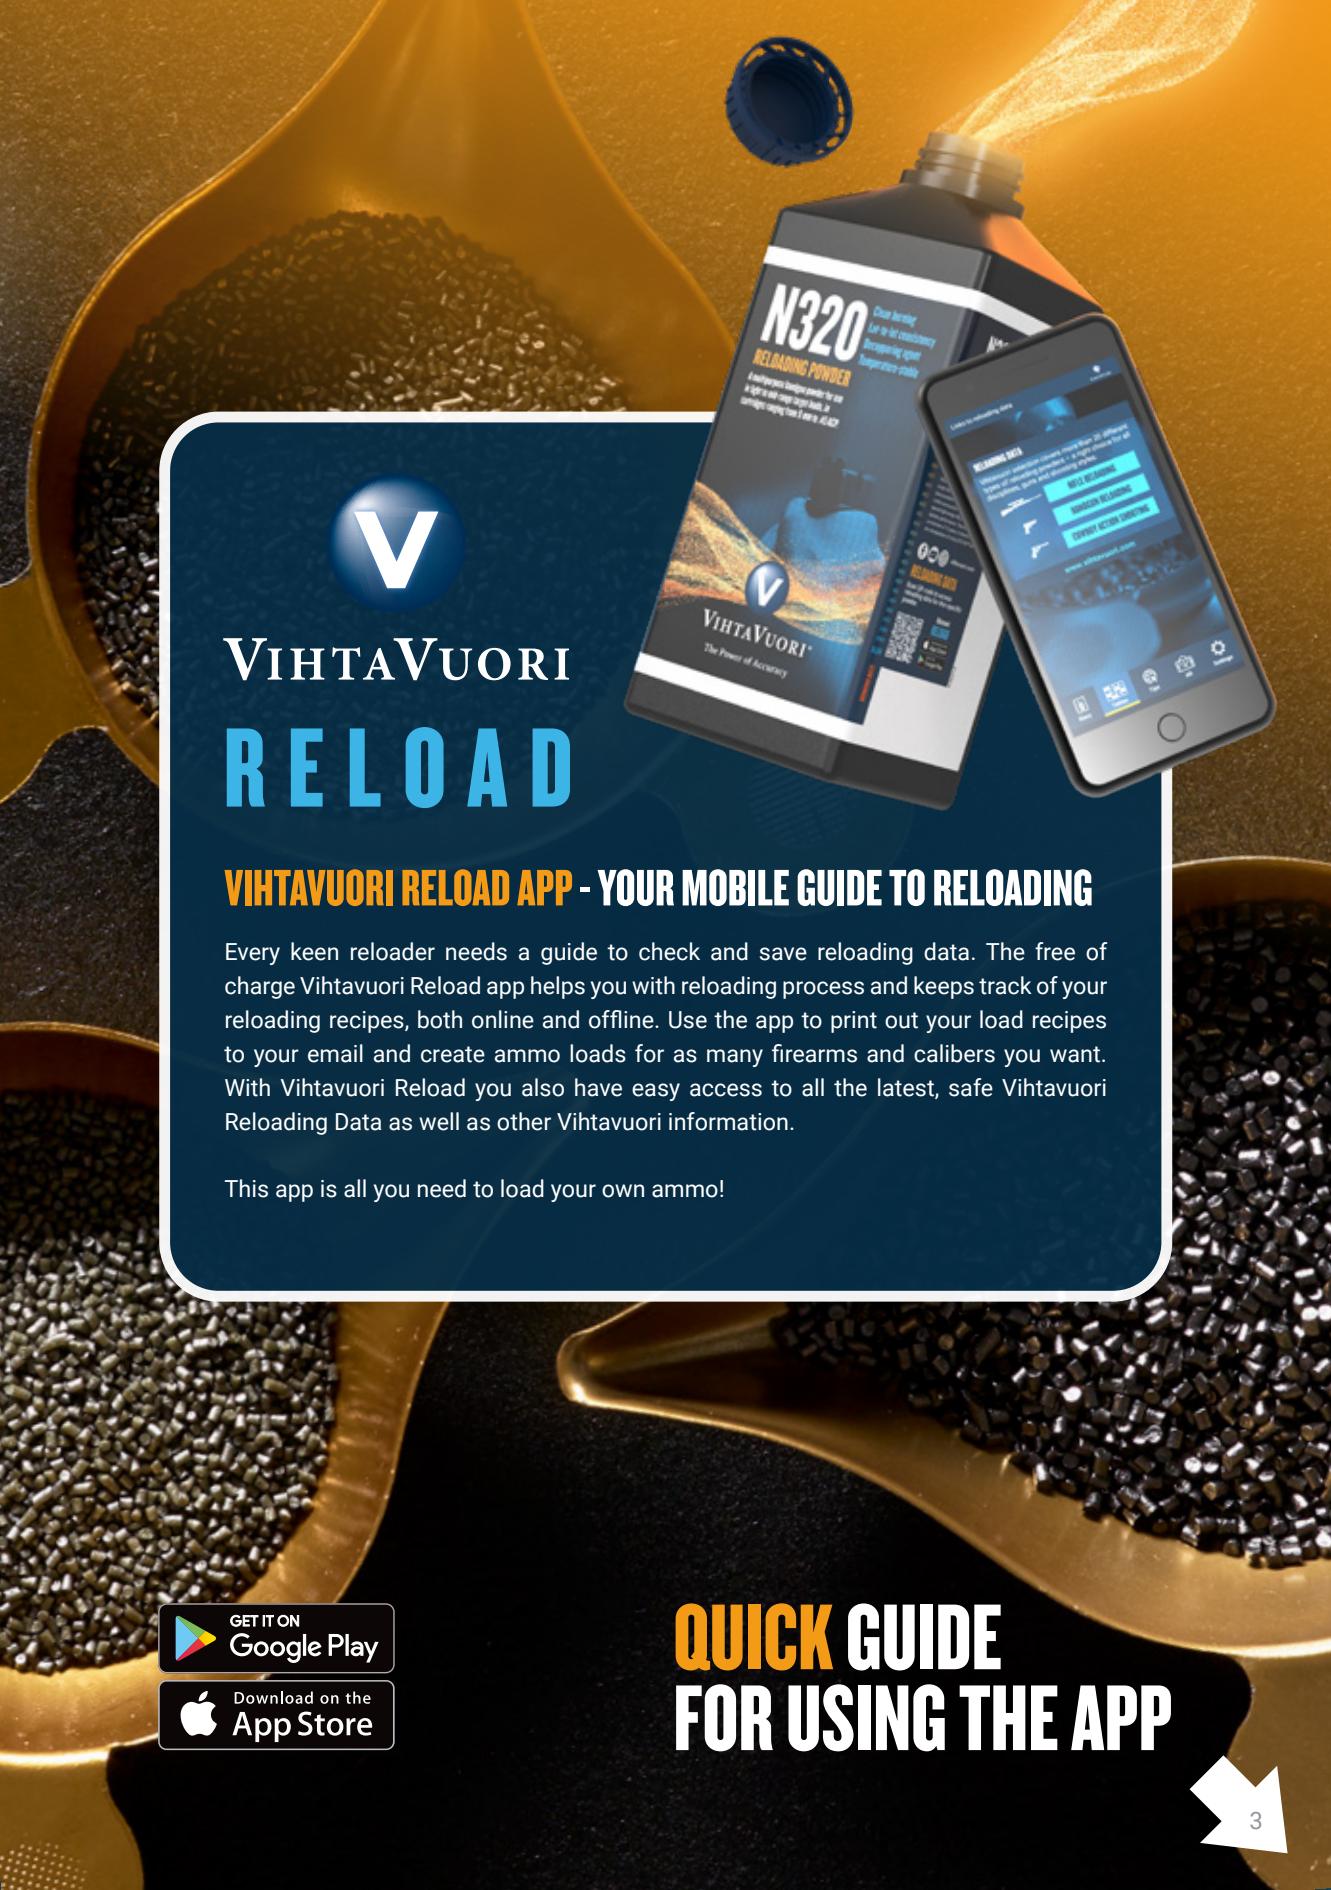

**VIHTAVUORI
RELOAD**

VIHTAVUORI RELOAD APP - YOUR MOBILE GUIDE TO RELOADING


Every keen reloader needs a guide to check and save reloading data. The free of charge Vihtavuori Reload app helps you with reloading process and keeps track of your reloading recipes, both online and offline. Use the app to print out your load recipes to your email and create ammo loads for as many firearms and calibers you want. With Vihtavuori Reload you also have easy access to all the latest, safe Vihtavuori Reloading Data as well as other Vihtavuori information.

This app is all you need to load your own ammo!

GET IT ON
Google Play

Download on the
App Store

**QUICK GUIDE
FOR USING THE APP**

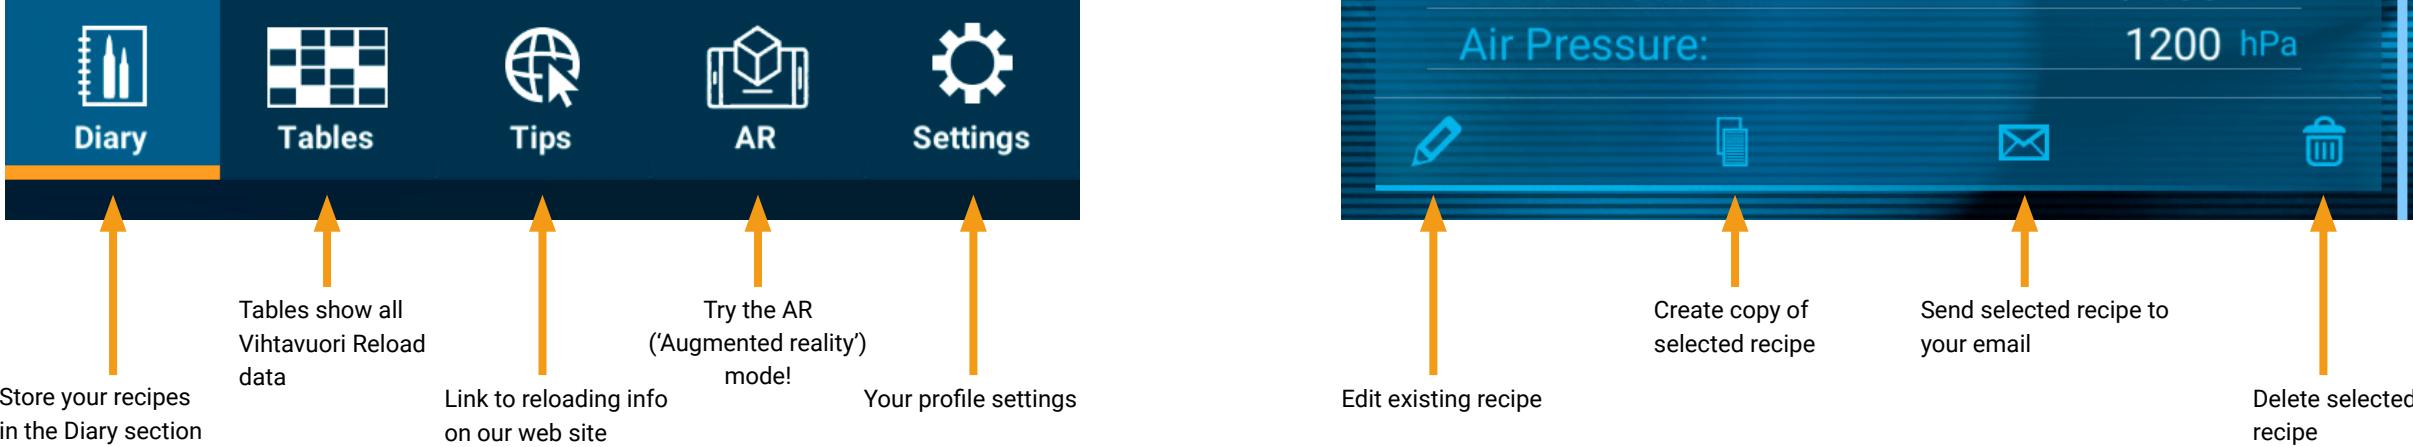

NEW USER

REGISTRATION

Name:

Email:

Password:

Country:

Recommended password format: at least one non-alphanumeric character, one digit ('0'-9'), one uppercase (A-Z), one lowercase (a-z) and be at least 6 characters.

DEFAULT UNITS

Weight: grams grains

Length: mm inches

Velocity: m/s fps

Date format: dd.mm.yyyy mm/dd/yyyy

Recipe Sync: Yes No

I have read and agree to the Terms of Service.

CANCEL **REGISTER NOW**

NEW DIARY ENTRY

Show advanced options

Select Weapon

LABEL INFO

Date: 11/16/2020 Rate your entry

Info: Cartridge muzzle velocity

POWDER

Manufacturer: Vihtavuori

Type:

Load: g

Manufacturing info: (year)

BULLET

Manufacturer:

Caliber:

Type:

Diary **Tables** **Tips** **AR** **Settings**

Add even more details to your recipe

Select weapon from your list

Rate your recipe. Rating is only for your own use

After registration you can send saved recipes to your e-mail, modify app settings and access your saved data even when switching devices

-
- ADD NEW DIARY ENTRY**
- .30-06 Sprg | Sako 11/13/2020 Cartridge muzzle velocity: 800 m/s
- .308 | Test gun 11/13/2020 Cartridge muzzle velocity: 723 m/s
- ADD NEW DIARY ENTRY**
- .30-06 Sprg | Sako 11/13/2020 Cartridge muzzle velocity: 800 m/s
- .308 | Test gun 11/13/2020 Cartridge muzzle velocity: 723 m/s
- Show all diary entries
- Diary** **Tables** **Tips** **AR** **Settings**
- Tap arrow to open/close your recipe
- View to all your recipes by weapon or caliber

Did you know that if you have registered a profile in Vihtavuori Reload, you can access your data even if you lose or change your mobile device to a new one.



PREMIUM N100 POWDERS

N110

Our fastest burning powder suitable for small rifle cartridges such as the .22 Hornet and .30 Carbine, but also well suited to many of the more powerful Magnum handgun rounds. It is particularly applicable for the .44 Rem Magnum, .454 Casull, .500 S&W Mag and similar high-performance revolver cartridges.

N120

A well-balanced powder specifically for some of the intermediate cases such as the .300 Blackout and 7.62x39. It operates best at a somewhat higher pressure than the faster N110, and gives good results in a variety of the small to mid-capacity cases such as the .221 Rem. Fireball and .30-30 Win.

N130

A fast-burning rifle powder well suited to both small cases like the .22 calibers and 6 mm PPCs, and large straight-walled cases such as the .45-70 Govt and .458 Win Mag. N130 is also an excellent choice for lighter bullets in such cartridges as the .222 and .223 Rems. Exceptional accuracy combined with the benefits of our anti-coppering technology.

N133

The preferred choice of most leading benchrest competitors and standard rifle shooters, and the powder used to set an incredible number of the current benchrest rifle records. Ideally suited to the 6mm PPC, but it's also versatile enough to serve in a wide variety of cartridges. Especially where a relatively fast-burning powder is called for, ranging from the .222 Rem to the .45-70 Govt.

N135

N135 is a relatively fast powder that delivers outstanding accuracy, velocity and consistent performance. An excellent choice for .308 Win loads with bullet weight less than 155 grains. Well suited to cartridges like the 6 mm BR Norma, .222 and .223 Rem, as well as large straight-walled cases such as the .458 Win. Mag.

N140

An incredibly versatile powder, well suited to a wide range of cartridges and bullet weights. From the .223 Rem with heavy bullets, to full sized powerhouses like the .375 H&H Magnum, our N140 is an ideal choice. Giving good velocities, clean performance and exceptional stability, this is the standard go-to powder for a wide variety of cases.

Strict quality acceptance limits have helped reloaders and cartridge manufacturers to achieve similar loads regardless of the production lot for almost 100 years.

The N100 series powders are primarily rifle powders with different burning rates to optimize your loads.

N170

Our slowest burning N100 series powder, recommended for the very large capacity cases such as the .300 Weatherby Mag. and the .300 Rem Ultra Mag. Good performances in most of the belted Magnum cartridges. N170 is one of the slowest canister-grade powders readily available from any manufacturer.

N150

Our N150 is a slow burning powder, well suited to most common mid-sized cartridges when used with heavier bullets in accuracy and hunting loads. An excellent choice for 185-220 grain bullets in the .30-06, 140-160 grain bullets in the 6.5x55, and 175-200 grain bullets in the .308 Win. Great for 6.5 Creedmoor. Combining Vihtavuori's latest decoppering technology and enhanced temperature stability, N150 is a tremendously versatile powder.

N160

A slow-burning powder well suited to a broad range of Magnums, and large capacity/small bore cartridges like the 6.5-284 Norma. It is an ideal combination when used with the 270 Win, .25-06 Rem and a variety of belted Magnums, and it is great for 6.5 Creedmoor as well. An excellent choice for lighter to mid-weight bullets in these cartridges, N160 is temperature stable and exceptionally clean burning.

N165

N165 is a very slow burning powder, making it a superior choice for the same range of cartridges as our N160 when using heavier bullets. Delivering slightly higher velocities with these projectiles makes N165 a wise choice when long-range performance is the goal. It delivers superb accuracy with heavy bullets in calibers ranging from 6.5x55 SE all the way to .416 Rigby, and is a top choice for the .338 Lapua Magnum.

24N41

Vihtavuori 24N41 is a single-based treated rifle powder very similar to the 20N29. It has a very large grain size (length 2,3 mm by diameter 1,3 mm) and an extremely slow burning rate ideally suited to the .50 BMG. It can also be used for some large capacity cases, such as the .300 Lapua Magnum, .300 Rem. Ultra Mag, and the .338 Lapua Magnum. Of the two, 24N41 is slightly faster than 20N29, with a renewed relative burning rate of 39 for the 24N41 compared to 36 for the 20N29, when N110 is given the index 100.

20N29

Vihtavuori 20N29 was originally developed for .50 BMG and military use, and even the name 20N29 originates from the Finnish Army standards.

20N29 is a single-based, surface treated powder with grain dimensions of 2,3 mm length and 1,3 mm diameter. The burning rate is slower and grain size larger than those of the N100 series powders. 20N29 is primarily used in large caliber and magnum applications with heavy bullets and in long-range target shooting. It is ideally suited for the .50 BMG, but has also gained a good reputation when used eg. in .300 Lapua Magnum and .30-378 Weatherby Magnum.

PREMIUM N300 HANDGUN POWDERS

N310

N310 is an extremely fast-burning pistol powder, ideally suited to light, target type loads. It gives outstanding accuracy in a wide range of cartridges from the .32 S&W Long to the .45 ACP wadcutter loadings. Clean burning, consistent and easy to load, N310 is the top choice for the competitive Bullseye pistol shooter.

N320

A fast-burning powder for use in light to mid-range target loads, in cartridges ranging from the 9 mm and .38 Special, up to the .44 Special and .45 ACP. Capable of producing higher velocities at acceptable pressures than our N310, N320 provides the handloader a bit more versatility at the loading bench.

N32C (TIN STAR)

This is a specialized powder intended to provide low bulk density for cartridges that were originally designed for Cowboy Action Shooters shooting lead bullets with single-action revolvers and lever-action rifles. The use of more conventional powder results in poor load density, and fails to adequately fill the case. Our N32C corrects this problem, and is ideally suited to many of the older cartridges used in Cowboy Action shooting, such as the .38 Special, .44 Special and .45 Colt.

N330

N330 provides a wide range of latitude for the handgun shooter, serving well for everything from light target to heavier high-velocity loadings. This is a versatile powder suitable for an exceptionally broad range of applications, especially designed for 9 mm Luger but also suitable for .38 Special, .40 S&W, .44 S&W Special and .45 Colt.

The N300 series powders are ideal for handgun and shotgun loads.

N105 SUPER MAGNUM

N105 Super Magnum is our slowest burning pistol powder, intended for the most powerful handgun cartridges in use today, particularly with heavy bullets and/or large case volume. Many of these specialized rounds operate at rifle pressures. Delivering this type of performance is precisely what prompted the development of N105. For such powerhouses as the .454 Casull or .500 S&W, N105 is an excellent powder choice.

N340

A flexible powder that serves well in medium to heavy high-velocity loadings. N340 is a good performer in high intensity rounds like the .357 and .44 Magnums, the 40 S&W and the .357 SIG cartridges.

N350

Our N350 is the slowest in the N300 series of handgun powders, and is ideal for very heavy loadings, and top end velocities and energies from a broad range of pistol and revolver cartridges. It is very well suited to loading powerful rounds for example in calibers 9 mm Luger, 10 mm AUTO and .45 ACP.

3N37

Originally developed as a powder for loading .22 rimfire cartridges, 3N37 has a burn rate very similar to N350, and can be used for many of the same applications. As handgun shooters began to experiment with 3N37, they found that this fine-grained powder loaded evenly through a measure and gave excellent results from a range of competitive cartridges used for USPSA and IPSC shooting.

3N38

The 3N38 is a specialized powder designed specifically for competitive handgun shooting with high-velocity loads in the 9mm and .40 S&W cartridges. A relatively slow-burning powder, 3N38 is a perfect choice for making Major with good accuracy and the clean-burning characteristics for which Vihtavuori is renowned.

PREMIUM N500 HIGH ENERGY POWDERS



N530

The fastest of our N500 High Energy series, N530 is an ideal for many of the smaller bottlenecked cases like the .223/5.56, or large straight-walled cases such as the .45-70 Springfield. It is also a useful powder for medium capacity cases like the .308 Win, when using lighter weight bullets of 155 grains or less.

N540

N540 is a mid-range powder in the N500 series, and an excellent choice for cartridges running from the .223/5.56mm, .308 Win and .30-06 Springfield with appropriate bullet weights. This is also a great powder for 6.5x47 Lapua and 6.5 Creedmoor as well as the .223 when using heavy bullets from 69 to 82 grains. It is exceptionally clean-burning and delivers outstanding accuracy.

N550

A slower burning powder very well suited to a wide range of medium to large cartridges, especially with heavier bullet weights. An ideal fit for many of the 30 caliber magnums with lighter bullets, but useful across a wide range of bore sizes. Particularly well matched to heavy bullet loadings in the 6.5x55 and .30-06 Springfield cartridges.

N555

Vihtavuori's N555 rifle powder is designed for precision rifle platforms chambered in cartridges such as 6mm & 6.5 Creedmoor, .284 Winchester, .260 Remington, .30-06 Springfield, and for rifle calibers with large case volume and comparatively small bullet diameters, among others. Competitive shooters and hunters will benefit from its insensitivity in extreme weather conditions. N555 is the most temperature stable powder in its class, and features unprecedented performance in the 6.5 Creedmoor. It includes an anti-fouling agent that minimizes barrel fouling to extend the length of your competitive shooting stages. Its unmatched lot-to-lot consistency also eliminates costly range time re-developing your favorite loads.

N560

A very slow-burning powder for large, magnum style cases, particularly when heavy bullets and high velocities are required. A perfect selection for the .270 Win, 7 mm Remington or Weatherby Magnums, .300 Winchester, RUM or Weatherby Magnums. A very good choice for the .338 Lapua Magnum when using lighter bullets of 250 grains or less.

N565

N500 series powder developed specially for the 250 gr bullet weight loads in .338 Lapua Magnum. N565 roughly splits the difference in burn-rate between N560 and N570, but is a bit closer to N570. It will cover many of the same cartridges and bullets as the first two, but allows the loader another option in fine tuning a load to the perfect combination. While N565 was tailored specifically for military sniping applications, it also has a wide range of sporting uses, particularly within long range shooting. The N565 will prove to be an ideal choice for calibers such as the 7mm Rem Magnum, the .30-06, .300 Win Mag, .300 Norma Mag as well as the .338 Norma Mag.

NEW!

N568

N568 is the ideal choice for today's most popular large capacity magnum cartridges, such as the 6.5 PRC, .300 PRC, .300 Winchester Magnum, and .338 Lapua Magnum. N568's slow burning characteristics and short-cut grains provide extremely consistent metering for long range competitive shooters, accuracy enthusiasts, and hunters alike. N568 excels with heavy-for-caliber projectiles and provides exceptional temperature stability and is insensitive to humidity changes. An excellent choice for classic belted magnum cartridges such as 7mm Remington Magnum, .300 RUM, .338 Winchester Magnum and more.

N570

The slowest burning member of the N500 line, N570 is the perfect choice for those tasks requiring heavy bullets and the largest capacity cases. Its burn rate is very close to that of our N170, but will generally provide a bit more velocity in the same cartridges, and using the same bullet weights. The burn-rate characteristics of N570 allow it to deliver the very best possible performance from such cartridges as the 6.5x284, .300 Rem Ultra Mag, and .338 Lapua Magnum.

TABLE OF CONTENTS

THE POWER OF ACCURACY	2
Vihtavuori RELOAD App Guide	4-5
N100 Series.....	6-7
N300 Series.....	8-9
N500 Series.....	10-11
PREFACE	13
ABOUT THE DATA	14
Disclaimer	14
How to Use the Data	14
Pressure	14
PROPERTIES AND STORAGE OF SMOKELESS POWDER	15
How to Check Smokeless Powder for Deterioration	16
Considerations for Storage of Smokeless Powder	16
Recommendations for Storage of Smokeless Powder	17
RELOADING SAFETY	18-19
RIFLE RELOADING DATA	20
Disclaimer	20
.204 Ruger	20
.22 Hornet.....	20
.221 Remington Fireball	21
.224 Valkyrie	21-22
.222 Remington	22-23
.223 Remington	23-26
.223 WSSM	26
.22 PPC-USA	26-27
.22-250 Remington	27
6mm PPC-USA	28
6mm BR Norma.....	28
6mm Creedmoor	28-31
.243 WSSM	31
.243 Winchester	31-33
6 XC	33
6mm Remington.....	33-34
.240 Weatherby Magnum	34
.25-06 Remington	34-35
6.5mm Grendel	35
6.5 x 47 Lapua	35-36
6.5 Creedmoor.....	36-39
.260 Remington	39-41
6.5 x 55 Swedish Mauser.....	41-43
6.5 x 55 Swedish Mauser/SKAN	43-46
6.5 -284 Norma	46-47
.270 WSM	47
.270 Winchester	47-48
.270 Weatherby Magnum	48
7mm - .08 Remington.....	48-49
.284 Winchester	49-50
7 x 57	50-51
7 x 57R	51
7 x 64	51-52
7 x 65R	53
7mm WSM	54
7mm Remington Magnum	54-55
7mm Weatherby Magnum.....	55
7mm Remington Ultra Magnum.....	55
.30 Carbine	56
.300 AAC Blackout.....	56
.308 Winchester	56-61
.30-30 Winchester	61
.300 Savage	61-62
7.62 x 53R (7,62 Russian)	62-63
7.5 x 55 Swiss GP31.....	63
.30-06 Springfield.....	64-68
.300 H&H Magnum	68
.300 WSM	68-69
.300 Norma Magnum	69-70
.300 Winchester Magnum.....	70-71
.300 Weatherby Magnum	72
.300 Lapua Magnum	72
.300 Remington Ultra Magnum..	72-73
.30-.378 Weatherby Magnum	73
7.62 x 39	74
.303 British	74
8 x 57 IS (8 mm Mauser)	74-75
8 x 57 IRS.....	75-76
8 x 68S.....	76
.338 Winchester Magnum.....	76-77
.338 Lapua Magnum	77-78
9.3 x 62	78-79
9.3 x 66 Sako	79
9.3 x 74R	79-80
.375 H&H Magnum	80
.416 Rigby.....	80-81
.444 Marlin	81
.45-70 Government.....	81
.458 Winchester Magnum.....	82
.50 Browning	82

HANDGUN RELOADING DATA	83
Disclaimer	83
7mm TCU	83
7mm BR Remington.....	84
7mm GJW	84
7.62 x 25 Tokarev.....	84-85
.32 S&W Long N.P.....	85
.32 S&W Long Wadcutter.....	85
9mm Br. C. / .380 Auto	85-86
9mm Luger / 9x19 mm	86-88
9 x 23 Winchester.....	88
.357 SIG.....	89
.38 Super Auto	89
.38 Special	90-91
.357 Magnum	91-92
.357 Remington Maximum	92
.40 S&W.....	92-93
10mm Auto	93
.41 Remington Magnum	93-94
.44 S&W Special	94
.44 Remington Magnum	94-95
.45 Auto / .45 ACP.....	95-97
.45 Colt.....	97
.45 Winchester Magnum.....	98
.454 Casull.....	98
.50 AE	98
.500 S&W Magnum	99
VIHTAVUORI SMOKELESS LOADS FOR COWBOY ACTION SHOOTING	100
.38 Special	101
.357 Magnum	101
.44 S&W Special	101
.44 Remington Magnum	101
.45 Colt.....	101
SHOTGUN RELOADING DATA	102
Lead Shot	102
Steel Shot Nickel Plated	103
Personal Loads	104-107
Vihtavuori Team	108-109
Photo Challenge Winner.....	110-111
Package Info	112-113
BURNING RATE CHART	114
VIHTAVUORI WORLDWIDE DISTRIBUTORS	115

PREFACE

Dear Vihtavuori customer,

The new Vihtavuori Reloading Guide 2021 is an updated version of the previous Vihtavuori Reloading Guides.

The contents of this updated issue has been revised with loading data for the following calibers:

Centerfire rifle

New calibers:
Updated data:
.224 Valkyrie
.223 Remington, 6 mm Creedmoor, .243 Winchester, 6.5 Creedmoor,
.260 Remington, 6.5 x 55 Swedish Mauser, 6.5 x 55 SE / 6.5 x 55 SKAN,
.284 Winchester, .308 Winchester, .30-06 Springfield

Centerfire handgun

Updated data:
9 mm Browning court / .380 Auto, 9 mm Luger / 9x19 mm,
.45 Auto / .45 ACP

Shotgun

New data for caliber 12/76 (3") with lead shot and steel shot nickel plated

The now published new rifle and pistol reloading data is expanding and revising the powder selection for existing bullets.

As a courtesy to the reloader the load tables contain notes of compressed loads and loads to fill the case up. For flexible usage this guide features data in metric and imperial dimension systems i.e. charge weight in grams and grains as well as muzzle velocity in meters and feet per second. This reloading guide also includes the accuracy loads noted in the load tables. These loads utilize worldwide well-known Lapua cartridge components and are factory tested either for even pressure / muzzle velocity and accuracy. These loads are highlighted in the load tables with an letter A.

All the loads in this guide are pressure tested according to the C.I.P. method. The maximum loads given in the tables are determined according to the C.I.P. and SAAMI maximum pressure specifications. The listed maximum loads should never be exceeded. Due to the differences in the cartridge components, individual weapons, shooting temperatures etc., always start developing your load by using the starting load according to the loading data. If there is no indication of the starting load, use 15 % lower charge than the listed maximum load as your starting load.

The Vihtavuori powders are manufactured by Nammo Vihtavuori Oy at the Vihtavuori plants. Sales and marketing of the reloading powders is carried out by Nammo Lapua Oy and Nammo Vihtavuori Oy. The contact details of Vihtavuori customer service and a listing of Vihtavuori Distributors can be found at the end of this guide. For latest updates of data and distributors check also vihtavuori.com, where this guide can also be downloaded in PDF format. Check also Apple App Store and Google Play store for the **Vihtavuori RELOAD app**. Latest reloading information and the possibility to save your own reloading recipes, at hand everywhere you go.

We wish you successful reloading with Vihtavuori powders.



VIHTAVUORI

ABOUT THE DATA

Disclaimer

As Nammo Vihtavuori Oy has no control over improper storage, handling, loading or use of our powders after they have left the factory, we make no warranty of any kind, either expressed or implied, limited or full. We specifically disclaim all warranties of fitness for a particular purpose and merchantability. We specifically disclaim all liability for consequential damages of any kind whatsoever, whether or not due to seller's negligence or based on strict product liability or principle of indemnity or contribution, Nammo Vihtavuori Oy neither assumes nor authorizes any person to assume for it any liability in connection with the use of this product.

How to Use the Data

Our rifle and handgun data listings generally contain maximum charges which are not to be exceeded. In some instances starting loads are also listed. Currently this booklet contains all of the data we can supply. Be certain you use the correct data and the specific bullet weight shown.

By staying 5 % below the maximum powder charge weight, pressures will be reduced by about 10 % while velocities will be only about 3 % lower than listed.

Caution: When loading handgun cartridges it is vital to maintain the minimum cartridge overall length (C.O.L.) listed in the tables. Shorter overall lengths may double chamber pressures. Longer lengths are permissible so long as the functioning of the handgun will not be impaired.

The data in the loading tables were obtained at an ambient temperature of 68 degrees Fahrenheit and relative humidity of 55 %. The values obtained were under carefully controlled conditions and may vary from those obtained with your firearm, specific component lots, loading dimensions, and loading procedures. The maximum charges must NEVER be exceeded. **Start loading with the starting load according to the loading data. If there is no indication of the starting load, use 15 % lower charge than the listed maximum.** When loading cartridges for which the listed charge is 10 grains or less, after firing 10 rounds at the minimum weight (15 % below maximum), increase charge weights by 0.2 grains and fire another 10 rounds. Repeat this procedure, if necessary, until you reach, but do not exceed,

the maximum listed charge. The same process is followed for heavier charges except that charge weights from 11 to 25 grains use increments of 0.5 grains. For charges over 25 grains increments of 1.0 grains will be correct.

If even a single test round shows signs of excessive pressure discontinue the use of the load. Do not fire even a single additional cartridge. Seek qualified help before proceeding! The traditional sign of overpressure is a flattened primer. When flattened primers start to occur, it is a definite warning that the charge should be reduced, quickly. Brass getting into the ejector and extractor cavities is a worse case. Blown out primers are worse still. If a case ruptures it may be a sign of a defective case or a truly lethal chamber pressure.

In case of overpressure signs it is wiser to back off, to be safe rather than sorry. Why risk potentially fatal injury? Better to stop shooting and immediately discard all such reloads.

Read also the Reloading Safety Rules on pages 16 and 17.

Pressure

There are numerous factors which can change the ballistic performance of a load even when the data is followed exactly. For example: The internal dimensions of a firearm can vary greatly even between two of the same make and model. Pressures can vary to extremes as different firearms are used. Each change in brand and even within different lots of a specific brand component can cause notable ballistic changes. Too, changes in ambient temperature can also cause ballistic altering pressures. Not every bullet of a given diameter and weight will produce alike pressure. Changes in case brand can also effect ballistics. There are numerous other causes of varying pressure levels.

Therefore it is essential that the reloader be well versed in the methods of carefully working up a reload powder charge in small increments as outlined in the various reloading handbooks that are available from reliable sources. The data in this book is not intended for use by persons not thoroughly versed in such procedures.

This guide should be supplemented by a good recognized reloading handbook that offers all appropriate information.

PROPERTIES AND STORAGE OF SMOKELESS POWDER

Smokeless powders, or propellants, are essentially mixtures of chemicals designed to burn under controlled conditions at the proper rate to propel a projectile from a gun.

Smokeless powders are made in three forms:

1. Thin, circular flakes or wafers
2. Small cylinders
3. Small spheres

Single-base smokeless powders derive their main source of energy from nitrocellulose.

The energy released from double-base smokeless powders is derived from both nitrocellulose and nitroglycerine.

All smokeless powders are extremely flammable by design, they are intended to bum rapidly and vigorously when ignited.

Oxygen from the air is not necessary for the combustion of smokeless powders since they contain sufficient built-in oxygen to burn completely, even in an enclosed space such as the chamber of a firearm.

In effect, ignition occurs when the powder granules are heated above their ignition temperature. This can occur by exposing powder to:

1. A flame such as a match or primer flash.
2. An electrical spark or the sparks from welding, grinding, etc..
3. Heat from an electric hot plate or a fire directed or near a closed container even if the powder itself is not exposed to the flame.

When smokeless powder burns, a great deal of gas at high temperature is formed. If the powder is confined, this gas will create pressure in the surrounding structure. The rate of gas generation is such, however, that the pressure can be kept at a low level if sufficient space is available or if the gas can escape.

In this respect smokeless powder differs from blasting agents or high explosives such as dynamite or blasting gelatin,

although smokeless powder may contain chemical ingredients common to some of these products.

High explosives such as dynamite are made to detonate, that is, to change from solid state to gaseous state with evolution of intense heat at such a rapid rate that shock waves are propagated through any medium in contact with them. Such shock waves exert pressure on anything they contact, and, as a matter of practical consideration, it is almost impossible to satisfactorily vent away the effects of a detonation involving any appreciable quantity of dynamite.

Smokeless powder differs considerably in its burning characteristics from common "black powder".

Black powder burns essentially at the same rate out in the open (unconfined) as when in a gun.

When ignited in an unconfined state, smokeless powder burns inefficiently with an orange-colored flame. It produces a considerable amount of light brown noxious smelling smoke. It leaves a residue of ash and partially burned powder. The flame is hot enough to cause severe burns.

The opposite is true when it burns under pressure as in a cartridge fired in a gun. Then it produces very little smoke, a small glow, and leaves very little or no residue. The burning rate of smokeless powder increases with increased pressure.

If burning smokeless powder is confined, gas pressure will rise and eventually can cause the container to burst. Under such circumstances, the bursting of a strong container creates effects similar to an explosion.

For this reason, the Department of Transportation (formerly Interstate Commerce Commission) sets specifications for shipping containers for propellants and requires tests for loaded containers - under actual fire conditions - before approving them for use.

When smokeless powder in D.O.T. approved containers is ignited during such tests, container seams split open or lids pop off - to release gases and powder from confinement at low pressure.

PROPERTIES AND STORAGE OF SMOKELESS POWDER

How to Check Smokeless Powder for Deterioration

Although modern smokeless powders are basically free from deterioration under proper storage conditions, safe practices require a recognition of the signs of deterioration and its possible effects.

Powder deterioration can be checked by opening the cap on the container and smelling the contents.

Powder undergoing deterioration has an irritating acidic odor. (Don't confuse this with common solvent odors such as alcohol, ether and acetone).

Check to make certain that powder is not exposed to extreme heat as this may cause deterioration. Such exposure produces an acidity which accelerates further reaction and has been known, because of the heat generated by the reaction, to cause spontaneous combustion.

Never salvage powder from old cartridges and do not attempt to blend salvaged powder with new powder. Don't accumulate old powder stocks. The best way to dispose of deteriorated smokeless powder is to burn it out in the open at an isolated location in small shallow piles (not over 1" deep). The quantity burned in any one pile should never exceed one pound. Use an ignition train of slow burning combustible material so that the person may retreat to a safe distance before powder is ignited.

Considerations for Storage of Smokeless Powder

Smokeless powder is intended to function by burning, so it must be protected against accidental exposure to flame, sparks or high temperatures.

For these reasons, it is desirable that storage enclosures be made of insulating materials to protect the powder from external heat sources.

Once smokeless powder begins to burn, it will normally continue to burn (and generate gas pressure) until it is consumed.

D.O.T. approved containers are constructed to open up at low internal pressures to avoid the effects normally produced by the rupture or bursting of a strong container.

Storage enclosures for smokeless powder should be constructed in a similar manner:

1. Of fire-resistant and heat-insulating materials to protect contents from external heat.
2. Sufficiently large to satisfactorily vent the gaseous products of combustion which would result if the quantity of smokeless powder within the enclosure accidentally ignited.

If a small, tightly enclosed storage enclosure is loaded to capacity with containers of smokeless powder, the walls of the enclosure will expand or move outwards to release the gas pressure - if the powder in storage is accidentally ignited.

Under such conditions, the effects of the release of gas pressure are similar or identical to the effects produced by an explosion.

Hence only the smallest practical quantities of smokeless powder should be kept in storage, and then in strict compliance with all applicable regulations and recommendations of the National Fire Protection Association.

PROPERTIES AND STORAGE OF SMOKELESS POWDER

Recommendations for Storage of Smokeless Powder

STORE IN A COOL, DRY PLACE. Be sure the storage area selected is free from any possible sources of excess heat and is isolated from open flame, furnaces, hot water heaters, etc. Do not store smokeless powder where it will be exposed to the sun's rays. Avoid storage in areas where mechanical or electrical equipment is in operation. Restrict from the storage areas heat or sparks which may result from improper, defective or overloaded electrical circuits.

DO NOT STORE SMOKELESS POWDER IN THE SAME AREA WITH SOLVENTS, FLAMMABLE GASES OR HIGHLY COMBUSTIBLE MATERIALS. STORE ONLY IN DEPARTMENT OF TRANSPORTATION APPROVED CONTAINERS.

Do not transfer the powder from an approved container into one which is not approved.

DO NOT SMOKE IN AREAS WHERE POWDER IS STORED OR USED. Place appropriate "NO SMOKING" signs in these areas. **THE STORAGE CABINETS SHOULD BE CONSTRUCTED OF INSULATING MATERIALS AND WITH A WEAK WALL, SEAMS OR JOINTS TO PROVIDE AN EASY MEANS OF SELFVENTING.**

DO NOT KEEP OLD OR SALVAGED POWDERS. Check old powders for deterioration regularly. Destroy deteriorated powders immediately.

OBEY ALL REGULATIONS REGARDING QUANTITY AND METHODS OF STORING. Do not store all your powders in one place. If you can, maintain separate storage locations. Many small containers are safer than one or more large containers.

KEEP YOUR STORAGE AND USE AREA CLEAN. Clean up spilled powder promptly. Make sure the surrounding area is free of trash or other readily combustible materials.

The above information has been provided with permission from SAAMI: SPORTING ARMS AND AMMUNITION MANUFACTURERS' INSTITUTE, INC. P.O. Box 838, Branford, CT 06405.

RELOADING SAFETY

Reloading is an enjoyable and rewarding hobby that is easily conducted with safety. But like many other human endeavours, carelessness or negligence can make reloading hazardous. The essence of reloading safety is proper handling and storage of primers and powder. As important is strict following of the instructions given by the manufacturers of the reloading equipment as well as the reloading components.

Before you get started, read the safety rules below and keep them in mind whenever reloading. Attention paid to detail and patience ensures safety and quality!

■ Reload only when you can give it your undivided attention. **Do not reload**, when fatigued or ill. Develop your own reloading routine to avoid mistakes. Avoid haste, load at a leisurely place and keep in mind that **absolutely no reloading under the influence of alcohol or drugs!**

■ Always wear proper eye protection. It is an unnecessary risk to reload without safety glasses.

■ Store powder and primers out of reach of children and away from heat and open fire. **Follow the manufacturer's instructions on your powder canister. Never smoke during a reloading session!**

■ Keep no more powder than needed available. Immediately return the unused powder to its original factory container to preserve its identity and usable life time.

■ Do not use any powder unless its identity is positively known. Scrap all unidentified powders according to the manufacturer's instructions on your powder canister. **Keep in mind that the trial-and-error method may lead to serious injury!**

■ **Do not store primers in bulk! Doing so will create a bomb!** Bulk primers will very likely mass detonate. The blast of a few hundred primers corresponds to a hand grenade in a room! Do not force primers in any circumstances. Take special care when filling and handling auto primer feed tubes. Keep primers in their original factory packing until used. Return unused primers to their original packing.

■ Do not use primers if their identity is lost. Discard them according to the manufacturer's instructions.

■ Start loading with the starting load according to the loading data. If there is no indication of the starting load, use 15 % lower charge than the listed maximum load. Increase the charge using small steps watching for overpressure signs from the primer and the case head at each step. **If you detect overpressures immediately stop shooting and reduce the charge.** Immediately disassemble the defective cartridges. **NEVER EXCEED THE MAXIMUM LOADS!**

■ Check visually the powder level in the cases so you are absolutely sure that you have no double powder charge. When a double powder charge is fired it may result in a gun damage, personal injury, even death.

■ If you change the lot of any component or if you change any of the components of your reload, you must develop your load from the starting load again. A different component as well as a component from a different manufacturing lot may cause changes in cartridge pressure.

■ You must absolutely follow the given cartridge overall lengths (C.O.L.) according to the reloading tables. The change in the bullet seating depth has a significant influence on the cartridge pressure.

■ Never reduce loads under the listed starting load.

■ Keep your reloading bench in good order. Clean up spilled powder and primers promptly and completely. Remember that the reloading bench is not a temporary store for other tools, used car spare parts etc.

■ Use your reloading equipment according to the manufacturer's recommendations. Study the instructions carefully and don't hesitate to ask, if you don't understand everything.

■ Be safe, be conscientious!

RELOADING SAFETY

Lead Exposure

A continuous lead exposure has been found out to create lead accumulation to living bodies, specially to the nervous system causing little by little serious physical impairment. Some unused reloading components as well as fired cases can contain lead or lead compounds, it is possible to a reloader to get exposed during reloading. Primers and bullets contain lead and it may be present as a residue in fired cartridge cases, too.

There are different ways lead may enter the body. However, the two most common are considered to be the mouth and the breathing. Therefore with simple precautions described underneath the possible lead exposure and its dangerous consequences can be avoided.

■ **WASH YOUR HANDS** thoroughly with warm water and soap after shooting or reloading.

■ **DO NOT EAT OR DRINK** during a reloading session. When handling fired cartridge cases the residual containing lead most likely gets to your hands. Therefore eating something requiring a straight hand contact during a reloading session hazards the reloader to lead exposure. Keep your hands away from your nose or your mouth during a reloading session.

■ **KEEP GOOD HOUSEHOLD AT YOUR RELOADING SITE.** Regular cleaning prevents the accumulation of residuals. Use a damp cloth or mop to clean up the reloading bench as well as the floor underneath. **DO NOT USE A VACUUM CLEANER!** The use of it poses a potential risk of exposure due to the spilled powder it collects up. Furthermore, an ordinary vacuum cleaner more spreads than collects the dust containing residuals.. Do not use any carpet at your reloading site. Carpet is hard to keep dust-free and it can create static electricity that can accidentally fire a primer.

■ **PROTECT YOUR BREATHING AGAINST THE DUST IN THE RELOADING AREA.** When using a dry tumbling media in cleaning the cartridge cases, keep in mind that the lead residue from the fired cases moves to the tumbling media, where it accumulates by use. Wear always a dust mask when pouring the dry cleaning media out of the tumbler and be careful not to spill the media on your reloading bench.

RIFLE RELOADING DATA

Disclaimer

All of this reloading information has been provided by Nammo Lapua Oy and Nammo Vihtavuori Oy. The data given here were obtained in laboratory conditions following strictly the CIP (Commission International Permanente) June 13, 1990 and November 9, 1993 rules. The listed maximum loads have been determined according to the respective CIP/SAAMI maximum pressure specification, whichever is lower.

These test methods have been deemed to be safe throughout the world.
Pressure is measured at the case mouth or from inside the case according to the CIP.

**DO NOT ATTEMPT ANY EXTRAPOLATIONS. PLEASE FOLLOW THE DATA AS WRITTEN.
IT IS A MUST FOR EVERY RELOADER TO READ THE RELOADING SAFETY RULES ON THE PAGES
16 AND 17 OF THIS GUIDE.**

.204 Ruger

Test barrel:	630 mm (24¾"), 1 in 12" twist						
Primers:	Small Rifle						
Cases:	Hornady, trim-to length 46,80 mm (1.843")						

Bullet				Powder	Starting load			Maximum load						
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity				
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
2,1	32	Sierra	Blitz King	57,1	2.248	N130	1,48	22.8	1106	3629	1,62	25.0	1213	3980
						N530	1,56	24.1	1070	3510	1,75	27.0	1225	4019
						N135	1,59	24.5	1112	3648	1,75	27.0	1228	4029
2,6	40	Hornady	V-Max	57,1	2.248	N133	1,50	23.1	1011	3317	1,64	25.3	1127	3698
						N530	1,50	23.1	1013	3323	1,67	25.8	1236	4055
						N140	1,70	26.2	1027	3369	1,82	28.1	1105	3625
3,2	50	Berger	HPBT	57,1	2.248	N133	1,40	21.6	857	2812	1,54	23.8	948	3110
						N530	1,43	22.1	866	2841	1,56	24.1	965	3166
						N140	1,57	24.2	884	2900	1,76	27.2	991	3251

.22 Hornet

Test barrel:	600 mm (23½"), 1 in 16" twist						
Primers:	Small Rifle						
Cases:	Sako, trim-to length 35,40 mm (1.394")						

Bullet				Powder	Starting load			Maximum load						
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity				
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
2,6	40	Speer	Spire Point	43,5	1.713	N110	0,52	8.0	713	2338	0,65	10.1	813	2668
						N120	0,48	7.3	654	2144	0,60	9.3	746	2448
						N110	0,47	7.3	609	1997	0,56	8.7	693	2274
3,2	50	Speer	Spitzer	43,5	1.713	N110	0,62	9.5	612	2008	0,74	11.3	724	2375
						N120	0,58	9.0	574	1884	0,69	10.6	679	2229
						N110	0,41	6.4	561	1841	0,53F	8.2F	644	2111

F = Full load

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.221 Remington Fireball

Test barrel:	356 mm (14"), 1 in 12" twist						
Primers:	Small Rifle						
Cases:	Lapua, trim-to length 35,40 mm (1.394")						

Bullet				Powder		Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.		Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm]	[in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
2,6	40	Sierra	Blitz King	46,5	1.831	N120	1,06	16.4	876	2874	1,12	17.3	924	3031
						N130	1,18	18.2	879	2884	1,25F	19.3F	931	3054
						N130	1,00	15.4	713	2339	1,12	17.3	814	2671
3,4	52	Sierra	MatchKing	46,5	1.831	N120	0,96	14.8	775	2543	1,05	16.2	806	2644
						N130	1,20	18.5	793	2602	1,25F	19.3F	823	2700
						N133	1,00	15.4	748	2454	1,07	16.5	792	2598
3,6	55	Lapua	FMJ	46,5	1.831	N120	0,86	13.3	718	2356	1,00	15.4	778	2552
						N130	1,06	16.4	752	2467	1,13	17.4	796	2612
						N133	1,18	18.2	764	2507	1,25F	19.3F	807	2648

F = Full load

.224 Valkyrie

Test barrel:	610 mm (24"), 1 in 7" twist						
Primers:	Small Rifle, Remington 7 1/2 BR						
Cases:	Starline, trim-to length 40,39 mm (1.590")						

Bullet				Powder		Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.		Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm]	[in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
3,4	53	Hornady	V-Max	56,0	2.205	N133	1,48	22.8	921	3022	1,60	24.7	984	3228
						N135	1,55	23.9	933	3061	1,68	25.9	1000	

.224 Valkyrie

cont.

Bullet				Powder	Starting load		Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	
					N550	1,57	24.2	783	2569	
5,2	80	Berger	VLD Target	57,4	2.260	N135	1,30	20.1	738	2421
					N140	1,40	21.6	755	2477	
					N540	1,45	22.4	772	2533	
					N150	1,35	20.8	750	2461	
					N550	1,57	24.2	791	2595	
5,5	85.5	Berger	Long Range Hybrid Target	57,4	2.260	N135	1,35	20.8	737	2418
					N140	1,44	22.2	747	2451	
					N540	1,48	22.8	756	2480	
					N150	1,45	22.4	749	2457	
					N550	1,60	24.7	779	2556	
5,7	88	Hornady	ELD Match	57,4	2.260	N530	1,30	20.1	714	2343
					N135	1,31	20.2	710	2329	
					N140	1,38	21.3	714	2343	
					N540	1,45	22.4	739	2425	
					N150	1,42	21.9	725	2379	
					N550	1,55	23.9	752	2467	
					N555	1,65	25.5	733	2405	
5,8	90	Berger	VLD Target	57,4	2.260	N135	1,35	20.8	713	2339
					N140	1,40	21.6	710	2329	
					N540	1,45	22.4	742	2434	
					N150	1,40	21.6	715	2346	
					N550	1,56	24.1	747	2451	

A = Accuracy load C = Compressed load

.222 Remington

Test barrel: 580 mm (23"), 1 in 14" twist

Primers: Small Rifle

Cases: Lapua, trim-to length 43,00 mm (1.693")

Bullet				Powder	Starting load		Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	
2,3	35	Hornady	V-Max	52,0	2.047	N110	0,93	14.4	986	3235
					N120	1,31	20.2	1036	3399	
					N130	1,44	22.2	1053	3455	
2,6	40	Sierra	Blitz King	54,0	2.126	N110	0,92	14.2	942	3091
					N120	1,32	20.4	922	3025	
					N130	1,38	21.3	997	3271	
2,9	45	Sierra	Soft Point	54,0	2.126	N120	1,22	18.8	926	3038
					N130	1,34	20.7	951	3120	
					N133	1,43	22.1	944	3097	
3,2	50	Hornady	SPSX	53,0	2.087	N120	1,20	18.5	896	2940
					N130	1,30	20.1	912	2992	
					N133	1,38	21.3	908	2979	
3,2	50	Lapua	Naturalis N566	53,0	2.087	N120	1,09	16.8	868	2848
					N130	1,21	18.7	886	2907	
					N133	1,33	20.5	906	2972	
3,3	51	Lapua	HPCE	54,0	2.126	N120	1,18	18.2	891	2923
					N130	1,28	19.8	899	2949	
					N133	1,37	21.1	914	2999	
3,4	52	Sierra	HPBT	54,0	2.126	N120	1,16	17.9	876	2874
					N130	1,28	19.8	899	2949	
					N133	1,37	21.1	916	3005	

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.222 Remington

cont.

Bullet				Powder	Starting load		Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	
3,6	55	Lapua	FMJ	54,0	2.126	N120	1,15	17.7	848	2782
					N130	1,26	19.4	870	2854	
					N133	1,36	21.0	875	2871	
					N135	1,38	21.3	891	2923	
3,6	55	Lapua	Soft Point	53,5	2.106	N120	1,19	18.4	858	2815
					N130	1,26	19.4	871	2858	
					N133	1,35	20.8	883	2897	
					N135	1,40	21.6	896	2940	
3,9	60	Hornady	HP	54,0	2.126	N120	1,07	16.5	806	2644
					N130	1,21	18.7	822	2697	
					N133	1,30	20.1	845	2772	
					N135	1,33	20.5	853	2799	

F = Full load

.223 Remington

Test barrel: 620 mm (25"), 1 in 12" twist

Primers: Small Rifle

Cases: Lapua, trim-to length 44,50 mm (1.752")

Bullet				Powder	Starting load		Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	
2,6	40	Speer	Spire Point	52,7	2.075	N120	1,23	19.0	963	3159
					N130	1,46	22.5	1032	3386	
					N133	1,54	23.8	1037	3402	
2,9	45	Sierra	Spitzer	54,0	2.126	N120	1,25	19.3	933	3061
					N130	1,44	22.2	991	3251	
					N133	1,51	23.3	987	3238	
					N135	1,64	25.3	1010	3314	
3,2	50	Lapua	Naturalis N566	56,0	2.205	N130	1,17	18.1	861	2825
					N133	1,34	20.7	892	2927	
					N530	1,36	21.0	888	2913	
					N135	1,42	21.9	906	2972	
3,2	50	Sierra	Blitzking	57,4	2.260	N130	1,37	21.1	942	3091
					N133	1,51	23.3	968	3176	
					N530	1,50	23.1	949	3114	
					N135	1,57	24.2	975	3199	
3,2	50	Speer	TNT-HP	57,0	2.244	N120	1,25	19.3	911	2989
					N130	1,43	22.1	947	3107	
					N133	1,56	24.1	990	3248	
					N135	1,65	25.5	999	3278	
3,3	51	Lapua	HPCE	57,0	2.244	N120	1,23	19.0	909	2982
					N130	1,35	20.8	930	3051	
					N133	1,45	22.4	943	3094	
					N530	1,53	23.6			

.223 Remington

cont.

Bullet				Powder	Starting load		Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity		
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
3,4	53	Hornady	V-Max	57,3	2.256	N130	1,35 20.8	922 3025	1,47 22.7	998	3274
				N133		1,48 22.8	938 3077	1,60 24.7	1017	3337	
				N530		1,48 22.8	940 3084	1,60 24.7	1010	3314	
				N135		1,55 23.9	955 3133	1,67 25.8	1029	3376	
				N133		1,45 22.4	894 2933	1,60 24.7	991	3251	
3,6	55	Berger	FB Varmint	57,4	2.260	N130	1,34 20.7	877 2877	1,49 23.0	974	3196
				N133		1,45 22.4	894 2933	1,60 24.7	991	3251	
				N530		1,50 23.1	905 2969	1,63 25.2	996	3268	
				N135		1,54 23.8	901 2956	1,70 26.2	997	3271	
				N140		1,60 24.7	889 2917	1,72 26.5	965	3166	
3,6	55	Hornady	FMJBT	57,0	2.244	N120	1,21 18.7	889 2917	1,34 20.7	960	3150
				N130		1,41 21.8	956 3136	1,52 23.5	1013	3323	
				N133		1,43 22.1	928 3045	1,59 24.5	1006	3301	
				N530		1,50 23.1	941 3087	1,62 25.0	1022	3353	
				N135		1,51 23.3	938 3077	1,66 25.6	1017	3337	
3,6	55	Hornady	V-Max	57,4	2.260	N130	1,32 20.4	857 2812	1,49 23.0	965	3166
				N133		1,39 21.5	848 2782	1,62 25.0	982	3222	
				N530		1,49 23.0	892 2927	1,64 25.3	994	3261	
				N135		1,52 23.5	884 2900	1,70 26.2	979	3212	
				N140		1,64 25.3	884 2900	1,72 26.5	928	3045	
3,6	55	Lapua	FMJ	57,0	2.244	N120	1,21 18.7	876 2874	1,35 20.8	953	3127
				N130		1,33 20.5	895 2936	1,50 23.1	985	3232	
				N133		1,43 22.1	911 2989	1,59 24.5	999	3278	
				N530		1,51 23.3	931 3054	1,64 25.3	1015	3330	
				N135		1,51 23.3	927 3041	1,68F 25.9F	999	3278	
3,6	55	Lapua	Soft Point	56,5	2.224	N120	1,09 16.8	820 2690	1,31 20.2	939	3081
				N130		1,21 18.7	857 2812	1,42 21.9	959	3146	
				N133		1,36 21.0	876 2874	1,56 24.1	980	3215	
				N530		1,44 22.2	891 2923	1,61 24.8	995	3264	
				N135		1,43 22.1	899 2949	1,64F 25.3F	1004	3294	
3,6	55	Berger	FB Varmint	57,4	2.260	N133	1,39 21.5	848 2782	1,57 24.2	947	3107
				N530		1,45 22.4	860 2822	1,58 24.4	962	3156	
				N135		1,49 23.0	860 2822	1,67 25.8	957	3140	
				N140		1,55 23.9	859 2818	1,70 26.2	935	3068	
				N540		1,61 24.8	883 2897	1,76 27.2	981	3219	
3,9	60	Hornady	HP	57,0	2.244	N130	1,33 20.5	874 2867	1,50 23.1	967	3173
				N133		1,43 22.1	888 2913	1,60 24.7	978	3209	
				N135		1,50 23.1	893 2930	1,67 25.8	976	3202	
				N140		1,62 25.0	895 2936	1,74F 26.8F	965	3166	
				N133		1,34 20.7	832 2730	1,50 23.1	904	2966	
4,0	62	Barnes	TAC-X BT	57,4	2.260	N133	1,40 21.6	821 2694	1,58 24.4	945	3100
				N530		1,36 21.0	798 2618	1,63 25.2	931	3054	
				N140		1,52 23.5	821 2694	1,70 26.2	924	3031	
				N540		1,55 23.9	840 2756	1,76 27.2	963	3159	
				N135		1,43 22.1	861 2825	1,56 24.1	953	3127	
4,0	62	Speer	FMJBT	57,4	2.260	N530	1,43 22.1	852 2795	1,60 24.7	942	3091
				N135		1,62 25.0	901 2956	1,70F 26.2F	943	3094	
				N140		1,36 21.0	784 2572	1,58 24.4	906	2972	
				N540		1,52 23.5	804 2638	1,73 26.7	919	3015	
				N135		1,54 23.8	829 2720	1,72 26.5	941	3087	
4,2	65	Sierra	SBT	57,0	2.244	N130	1,23 19.0	819 2687	1,36 21.0	892	2927

.223 Remington

cont.

Bullet				Powder	Starting load		Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity		
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
4,5	69	Lapua	Scenar ¹⁾	57,4	2.260	N133	1,31 20.2	789 2589	1,42 21.9	849	2785
				N530		1,37 21.1	809 2654	1,47 22.7	869	2851	
				N135		1,37 21.1	796 2612	1,49 23.0	862	2828	
				N140		1,48 22.8	823 2700	1,60 24.7	879	2884	
				N540		1,52 23.5	844 2769	1,66 25.6	932	3058	
4,5	69	Sierra	HPBT ¹⁾	57,0	2.244	N133	1,34 20.7	792 2598	1,48 22.8	867	2844
				N135		1,40 21.6	804 2638	1,54 23.8	875	2871	
				N140		1,53 23.6	820 2690	1,68 25.9	897	2943	
				N540		1,56 24.1	824 2703	1,71 26.4	910	2986	
				N140		1,42 21.9	761 2497	1,59 24.5	862	2828	
4,8	73	Berger	GMX	56,9	2.240	N133	1,25 19.3	778 2552	1,31 20.2	813	2667
				N530		1,25 19.3	754 2474	1,37 21.1	834	2736	
				N135		1,25 19.3	752 2467	1,41 21.8	835	2740	
				N140		1,40 21.6	761 2497	1,59 24.5	862	2828	
				N540		1,42 21.9	769 2523	1,58 24.4	870	2	

.223 Remington					cont.								
Bullet				Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s] [fps]	
					N540	1,39	21.4	730	2395	1,53	23.7	808 2652	
5,5	85,5	Berger	Long Range Hybrid Target	59,0 ⁵⁾	2.323	N133	1,25	19.3	724	2375	1,38	21.3	793 2602
						N135	1,30	20.1	734	2408	1,43	22.1	804 2638
						N140	1,42	21.9	755	2477	1,55	23.9	826 2710
						N540	1,48	22.8	769	2523	1,60	24.7	837 2746
						N150	1,45	22.4	758	2487	1,60C	24.7C	823 2700
5,7	88	Hornady	ELD Match	59,0 ⁴⁾	2.323	N133	1,25	19.3	717	2352	1,38	21.3	780 2559
						N530	1,25	19.3	721	2365	1,41	21.8	794 2605
						N135	1,30	20.1	721	2365	1,42	21.9	785 2575
						N140	1,40	21.6	742	2434	1,52C	23.5C	802 2631
						N540	1,42	21.9	741	2431	1,57	24.2	819 2687
						N150	1,42	21.9	735	2411	1,50C	23.1C	774 2539
5,8	90	Berger	HPBT	62,4 ⁶⁾	2.457	N140	1,25	19.3	646	2119	1,41	21.8	735 2411
						N540	1,34	20.7	682	2238	1,49	23.0	759 2490
						N150	1,26	19.4	651	2136	1,46	22.5	741 2431
5,8	90	Sierra	HPBT	59,8 ⁷⁾	2.354	N140	1,25	19.3	640	2100	1,44	22.2	742 2434
						N540	1,34	20.7	678	2224	1,52	23.5	762 2500
						N150	1,24	19.1	648	2126	1,48	22.8	748 2454

.22 PPC-USA					cont.								
Bullet					Powder	Starting load				Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
					N133	1.45	22.4	901	2956	1.78	27.4	1039	3409
					N135	1.68	25.9	961	3151	1.93	29.7	1103	3617

.22-250 Remington

Test barrel:	580 mm (22"), 1 in 14" twist
Primers:	Large Rifle
Cases:	Lapua .22-250 Remington, trim-to length 48.30 mm (1.902")

Bullet					Powder		Starting load				Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
2,6	40	Sierra	Blitz King	58,9	2.319	N130	1,79	27,6	1097	3599	1,98	30,6	1194	3917
						N133	1,97	30,4	1099	3606	2,15	33,2	1205	3953
						N135	2,03	31,3	1097	3599	2,18	33,6	1207	3960
						N140	2,19	33,8	1111	3645	2,39	36,9	1211	3973
2,9	45	Sierra	SP	58,9	2.319	N130	1,66	25,6	1023	3356	1,99	30,7	1145	3757
						N133	1,87	28,9	1033	3389	2,10	32,4	1126	3694
						N135	1,87	28,9	1023	3356	2,18	33,6	1154	3786
						N150	2,06	31,8	1033	3389	2,32	35,8	1137	3730
3,2	50	Lapua	Naturalis N566	59,0	2.323	N135	1,62	25,0	913	2995	1,71	26,4	987	3238
						N140	1,81	27,9	936	3071	2,04	31,5	1036	3399
						N540	2,00	30,9	978	3209	2,21	34,1	1070	3510
						N150	1,82	28,1	944	3097	2,06	31,8	1043	3422
3,3	51	Lapua	HPCE	59,6	2.346	N133	1,75	27,0	969	3179	1,99	30,7	1064	3491
						N135	1,72	26,5	959	3146	1,96	30,2	1055	3461
						N140	1,99	30,7	988	3241	2,19	33,8	1087	3566
						N540	2,08	32,1	1001	3284	2,32	35,8	1105	3625
3,6	55	Lapua	FMJ	59,6	2.346	N135	1,75	27,0	936	3071	1,98	30,6	1040	3412
						N140	1,94	29,9	959	3146	2,17	33,5	1050	3445
						N540	2,03	31,3	972	3189	2,29	35,3	1085	3560
						N150	1,98	30,6	968	3176	2,25	34,7	1057	3468
3,6	55	Lapua	Soft Point	59,5	2.343	N135	1,62	25,0	902	2959	1,82	28,1	990	3248
						N140	1,81	27,9	932	3058	2,04	31,5	1017	3337
						N540	2,09	32,3	981	3219	2,29	35,3	1075	3527
						N150	1,83	28,2	903	2963	2,08	32,1	1019	3343
3,9	60	Hornady	HP	59,6	2.346	N135	1,62	25,0	845	2772	1,86	28,7	955	3133
						N140	1,81	27,9	887	2910	2,10	32,4	989	3245
						N540	2,06	31,8	938	3077	2,27	35,0	1043	3422
						N150	1,91	29,5	907	2976	2,16	33,3	1012	3320
4,0	62	Barnes	TSX	59,7	2.350	N140	1,67	25,8	831	2726	1,90	29,3	930	3051
						N540	1,82	28,1	865	2838	2,09	32,3	974	3196
						N150	1,72	26,5	843	2766	1,98	30,6	943	3094
						N550	1,98	30,6	854	2802	2,24	34,6	953	3127
4,5	69	Lapua	HPBT ¹⁾	59,6	2.346	N140	1,71	26,4	820	2690	1,98	30,6	914	2999
						N540	1,85	28,5	843	2766	2,10	32,4	939	3081
						N150	1,77	27,3	836	2743	2,05	31,6	921	3022
						N550	1,98	30,6	854	2802	2,24	34,6	953	3127

¹⁾ 1 in 10" twist

Bullet					Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
3,3	51	Lapua	HPCE	54,6	2.150	N530	2,22	34,3	1055	3461	2,59	40,0	1205	3953
						N135	2,10	32,4	1011	3317	2,61	40,3	1180	3871
						N140	2,49	38,4	1074	3524	2,83	43,7	1183	3881
3,6	55	Lapua	Soft Point	54,5	2.146	N530	2,14	33,0	1009	3310	2,48	38,3	1147	3763
						N135	2,09	32,3	1001	3284	2,49	38,4	1119	3671
						N140	2,24	34,6	996	3268	2,68	41,4	1140	3740
4,5	69	Lapua	Scenar	56,7	2.232	N140	2,29	35,3	933	3061	2,61	40,3	1030	3379
						N540	2,35	36,3	960	3150	2,68	41,4	1077	3533
						N150	2,33	36,0	947	3107	2,61	40,3	1048	3438
						N550	2,48	38,3	972	3189	2,84	43,8	1078	3537

Test barrel:	610 mm (24"), 1 in 14" twist
Primers:	Small Rifle
Cases:	Sako, trim-to length 38,30 mm (1.508")

Bullet					Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
3,4	52	Sierra	HPBT	51,4	2.024	N120	1,33	20,5	919	3016	1,56	24,1	1039	3408
						N130	1,43	22,1	934	3063	1,66	25,6	1069	3507
						N133	1,51	23,3	947	3107	1,77	27,3	1087	3565
						N135	1,65	25,5	971	3185	1,90	29,2	1099	3607
3,6	55	Speer	Spitzer	51,8	2.039	N130	1,41	21,8	898	2946	1,69	26,1	1026	3367

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

6 mm PPC-USA

Test barrel:	580 mm (23"), 1 in 14" twist
Primers:	Small Rifle
Cases:	Sako, trim-to length 38,30 mm (1.508")

Bullet				Powder		Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.		Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm]	[in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
4,4	68	Euber	HPFB	53,6	2.110	N130	1,52	23.4	843	2766	1,68	25.9	928	3045
						N133	1,63	25.2	840	2756	1,83C	28.2C	951	3120
4,5	70	Sierra	HPBT	53,6	2.110	N120	1,39	21.5	809	2654	1,55	23.9	901	2956
						N130	1,47	22.7	820	2690	1,69	26.1	934	3064
						N133	1,59	24.6	826	2710	1,79C	27.6C	935	3068

ompressed load

6 mm BR Norma

Test barrel:	650 mm (25½"), 1 in 8" twist
Primers:	Small Rifle
Cases:	Lapua, trim-to length 39,40 mm (1.551")

Bullet				Powder		Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.		Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm]	[in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
4,5	70	Sierra	HPBT	57,0	2.244	N133	1,64	25.3	864	2834	1,86	28.7	957	3140
						N135	1,88	29.0	901	2956	2,20	33.9	1009	3310
5,0	77	Lapua	HP	57,0	2.244	N135	1,81	27.9	880	2887	2,01	31.0	957	3140
						N140	1,94	29.9	882	2894	2,15	33.2	965	3166
						N540	2,00	30.9	888	2913	2,18	33.6	980	3215
5,0	77	Lapua	HP SJ	60,0	2.362	N133	1,85	28.5	884	2900	2,01A	31.0A	964	3163
						N140	2,05	31.6	900	2953	2,22	34.3	982	3222
						N540	2,14	33.0	914	2999	2,31	35.6	999	3278
5,5	85	Barnes	TSX	58,5	2.303	N140	1,62	25.0	775	2543	1,88	29.0	877	2877
						N540	1,72	26.5	803	2635	1,97	30.4	908	2979
						N150	1,63	25.2	776	2546	1,90	29.3	874	2867
5,8	90	Lapua	Naturalis	54,7	2.154	N140	1,75	27.0	790	2592	2,03	31.3	879	2884
						N540	1,89	29.2	816	2677	2,11	32.6	915	3002
						N150	1,81	27.9	795	2608	2,10	32.4	887	2910
5,8	90	Lapua	Scenar	60,0	2.362	N140	1,68	26.0	788	2584	1,93	29.8	871	2858
						N540	1,69	26.1	757	2484	2,20	33.9	952	3123
6,5	100	Lapua	Mega	55,3	2.177	N140	1,66	25.6	737	2419	1,88	29.0	825	2707
						N540	1,81	27.9	772	2533	2,01	31.0	857	2812
6,8	105	Lapua	Scenar	60,0	2.362	N140	1,67	25.8	746	2447	1,87	28.9	821	2694
						N540	1,75	27.0	756	2480	1,97	30.4	846	2776

accuracy load

6 mm Creedmoor

Test barrel:	660 mm (26"), 1 in 8" twist
Primers:	Small Rifle
Cases:	Lapua, trim-to length 48.75 mm (1.919")

Bullet					Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
3,6	55	Nosler	Ballistic Tip Varmint	64,5	2,539	N135	2,54	39,2	1111	3645	2,70	41,7	1196	3924
						N140	2,70	41,7	1126	3694	2,87	44,3	1210	3970
						N540	2,78	42,9	1138	3734	2,97	45,8	1240	4068
						N150	2,72	42,0	1112	3648	2,91	44,9	1200	3937
						N550	2,90	44,8	1131	3711	3,10F	47,8F	1236	4055
4,2	65	Hornady	V-Max	64,9	2,555	N140	2,41	37,2	1009	3310	2,69	41,5	1110	3642
						N540	2,54	39,2	1037	3402	2,76	42,6	1136	3727

28

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

6 mm Creedmoor

cont

Bullet					Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
					N150	2,45	37.8	1015	3330	2,71	41.8	1107	3632	
					N550	2,72	42.0	1044	3425	2,94	45.4	1145	3757	
4,5	70	Sierra	Blitz King	66,0	2.598	N140	2,54	39.2	1008	3307	2,71	41.8	1085	3560
					N540	2,58	39.8	1030	3379	2,77	42.7	1120	3675	
					N150	2,54	39.2	1006	3301	2,74	42.3	1085	3560	
					N550	2,77	42.7	1032	3386	2,92	45.1	1121	3678	
5,2	80	Barnes	TTSX BT	63,0	2.480	N150	2,20	34.0	914	2999	2,44	37.7	994	3261
					N550	2,51	38.7	944	3097	2,70	41.7	1030	3379	
					N160	2,62	40.4	934	3064	2,90	44.8	1025	3363	
					N560	2,85	44.0	936	3071	3,10F	47.8F	1025	3363	
5,7	87	Berger	VLD Hunting	67,8	2.669	N140	2,19	33.8	886	2907	2,47	38.1	971	3186
					N540	2,33	36.0	914	2999	2,55	39.4	1001	3284	
					N150	2,21	34.1	891	2923	2,49	38.4	974	3196	
					N550	2,52	38.9	927	3041	2,74	42.3	1013	3323	
					N555	2,75	42.4	945	3100	3,00C	46.3C	1027	3369	
					N160	2,72	42.0	929	3048	2,95	45.5	1011	3317	
					N560	2,87	44.3	923	3028	3,12	48.1	1011	3317	
5,8	90	Lapua	Naturalis	70,0	2.756	N540	2,27	35.0	877	2877	2,51	38.7	963	3159
					N150	2,16	33.3	845	2772	2,44	37.7	928	3045	
					N550	2,49	38.4	894	2933	2,73	42.1	979	3212	
					N160	2,51	38.7	863	2831	2,93	45.2	971	3186	
					N560	2,87	44.3	899	2949	3,11	48.0	987	3238	
5,8	90	Lapua	Scenar-L	70,0	2.756	N540	2,22	34.3	885	2904	2,46	38.0	971	3186
					N150	2,15	33.2	856	2808	2,38	36.7	929	3048	
					N550	2,43	37.5	898	2946	2,67	41.2	988	3241	
					N555	2,80	43.2	940	3084	2,95F	45.5F	988	3241	
					N160	2,54	39.2	880	2887	2,85	44.0	971	3186	
					N560	2,76	42.6	898	2946	3,02	46.6	991	3251	
5,8	90	Nosler	Ballistic Tip Hunting	69,5	2.736	N540	2,37	36.6	889	2917	2,59	40.0	975	3199
					N150	2,24	34.6	851	2792	2,48	38.3	929	3048	
					N550	2,50	38.6	899	2949	2,74	42.3	986	3235	
					N555	2,65	40.9	932	3058	2,95F	45.5F	979	3212	
					N160	2,80	43.2	892	2927	3,02F	46.6F	978	3209	
5,8	90	Swift	Scirocco II	70,5	2.776	N540	2,20	34.0	853	2799	2,46	38.0	946	3104
					N150	2,06	31.8	818	2684	2,33	36.0	899	2949	
					N550	2,38	36.7	873	2864	2,66	41.1	968	3176	
					N555	2,70	41.7	909	2982	2,93	45.2	978	3209	
					N160	2,44	37.7	845	2772	2,79	43.1	942	3091	
					N560	2,78	42.9	884	2900	3,05	47.1	979	3212	
6,1	95	Sierra	MatchKing	70,0	2.756	N540	2,23	34.4	869	2851	2,44	37.7	951	3120
					N150	2,15	33.2	850	2789	2,37	36.6	920	3018	
					N550	2,44	37.7	888	2913	2,68	41.4	975	3199	
					N555	2,70	41.7	899	2949	2,92	45.1	978	3209	
					N160	2,65	40.9	878	2881	2,87	44.3	960	3150	
					N560	2,81	43.4	891	2923	3,05	47.1	981	3219	
6,2	95	Berger	Classic Hunter	69,0	2.717	N540	2,13	32.9	840	2756	2,36	36.4	923	3028
					N150	2,03	31.3	825	2707	2,23	34.4	887	2910	
					N550	2,30	35.5	857	2812	2,57	39.7	943	3094	
					N555	2,68	41.4	896	2940	2,91	44.9	974	3196	
					N160	2,25	34.7	821	2694	2,69	41.5	928	3045	
					N560	2,65	40.9	864	2835	2,96	45.7	957	3140	
6,2	95	Berger	VLD Hunting	68,6	2.701	N540	2,25	34.7	875	2871	2,48	38.3	960	3150
					N150	2,22	34.3	858	2815	2,46	38.0	937	3074	
					N550	2,49	38.4	902	2959	2,67	41.2	977	3205	

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

6 mm Creedmoor

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
					N555	2,69	41.5	911	2989	2,92	45.1	988	3241	
					N160	2,72	42.0	889	2917	2,97	45.8	972	3189	
					N560	2,83	43.7	893	2930	3,04	46.9	979	3212	
6,8	105	Berger	Hybrid Target	71,0	2.795	N540	2,08	32.1	806	2644	2,33	36.0	889	2917
					N150	1,94	29.9	774	2539	2,26	34.9	857	2812	
					N550	2,27	35.0	821	2694	2,55	39.4	909	2982	
					N555	2,55	39.4	847	2779	2,77	42.7	923	3028	
					N160	2,30	35.5	805	2641	2,65	40.9	895	2936	
					N560	2,63	40.6	834	2736	2,91	44.9	921	3022	
6,8	105	Berger	VLD Target	71,0	2.795	N540	2,15	33.2	812	2664	2,38	36.7	897	2943
					N150	2,07	31.9	788	2585	2,32	35.8	865	2838	
					N550	2,37	36.6	840	2756	2,59	40.0	917	3009	
					N555	2,59	40.0	855	2805	2,82	43.5	929	3048	
					N160	2,60	40.1	829	2720	2,86	44.1	909	2982	
					N560	2,72	42.0	846	2776	2,95	45.5	929	3048	
6,8	105	Lapua	Scenar	71,0	2.795	N540	2,07	31.9	803	2635	2,30	35.5	883	2897
					N150	1,95	30.1	764	2507	2,23	34.4	851	2792	
					N550	2,27	35.0	825	2707	2,50	38.6	904	2966	
					N555	2,60	40.1	858	2815	2,83	43.7	927	3041	
					N160	2,34	36.1	805	2641	2,66	41.1	891	2923	
					N560	2,61	40.3	834	2736	2,88	44.4	922	3025	
					N565	2,73	42.1	847	2779	3,00	46.3	923	3028	
7,0	108	Berger	BT Target	70,7	2.783	N540	1,97	30.4	789	2589	2,24	34.6	866	2841
					N150	1,89	29.2	757	2484	2,14	33.0	833	2733	
					N550	2,16	33.3	804	2638	2,41	37.2	883	2897	
					N160	2,40	37.0	841	2759	2,51	38.7	870	2854	
					N560	2,59	40.0	825	2707	2,81	43.4	908	2979	
7,0	108	Berger	Elite Hunter	71,0	2.795	N540	2,20	34.0	826	2710	2,41	37.2	894	2933
					N150	2,05	31.6	792	2598	2,30	35.5	858	2815	
					N550	2,34	36.1	835	2740	2,58	39.8	907	2976	
					N555	2,60	40.1	854	2802	2,84	43.8	924	3031	
					N160	2,60	40.1	831	2726	2,82	43.5	903	2963	
					N560	2,66	41.1	835	2740	2,94	45.4	923	3028	
7,0	108	Sierra	MatchKing	66,2	2.606	N540	2,08	32.1	804	2638	2,30	35.5	883	2897
					N150	1,98	30.6	774	2539	2,22	34.3	852	2795	
					N550	2,27	35.0	820	2690	2,50	38.6	904	2966	
					N160	2,41	37.2	813	2667	2,67	41.2	890	2920	
					N560	2,63	40.6	834	2736	2,87	44.3	918	3012	
7,1	109	Berger	Long Range Hybrid Target	71,0	2.795	N540	2,13	32.9	820	2690	2,40	37.0	886	2907
					N150	2,09	32.3	783	2569	2,30	35.5	853	2799	
					N550	2,32	35.8	828	2717	2,54	39.2	902	2959	
					N555	2,58	39.8	846	2776	2,82	43.5	917	3009	
					N160	2,57	39.7	829	2720	2,82	43.5	896	2940	
					N560	2,72	42.0	834	2736	2,96	45.7	922	3025	
7,1	110	Sierra	MatchKing	71,0	2.795	N540	2,05	31.6	793	2602	2,27	35.0	876	2874
					N150	1,95	30.1	756	2480	2,19	33.8	835	2740	
					N550	2,22	34.3	811	2661	2,46	38.0	892	2927	
					N555	2,48	38.3	826	2710	2,71	41.8	900	2953	
					N160	2,35	36.3	793	2602	2,65	40.9	879	2884	
					N560	2,60	40.1	824	2703	2,81	43.4	903	2963	
7,5	115	Berger	VLD Hunting	71,0	2.795	N540	2,04	31.5	767	2516	2,25	34.7	844	2769
					N150	1,95	30.1	744	2441	2,18	33.6	814	2671	
					N550	2,22	34.3	786	2579	2,42	37.3	853	2799	
					N555	2,45	37.8	805	2641	2,69	41.5	878	2881	

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

6 mm Creedmoor

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]		
					N160	2,30	35.5	772	2533	2,62	40.4	856	2808	
					N560	2,55	39.4	800	2625	2,78	42.9	885	2904	
7,5	115	Berger	VLD Target	71,1	2.799	N540	1,96	30.2	757	2484	2,21	34.1	832	2730
					N150	1,83	28.2	726	2382	2,15	33.2	810	2657	
					N550	2,18	33.6	781	2562	2,43	37.5	858	2815	
					N555	2,43	37.5	797	2615	2,68	41.4	874	2867	
					N160	2,17	33.5	760	2493	2,54	39.2	847	2779	
					N560	2,54	39.2	797	2615	2,81	43.4	883	2897	

C = Compressed load F = Full load

.243 WSSM

Test barrel:	690 mm (27"), 1 in 10" twist
Primers:	Small Rifle
Cases:	Winchester, trim-to length 42,20 mm (1.660")

Bullet

Bullet				Powder	Starting load		Maximum load			
Weight		Mfg	Type/Name</th							

.243 Winchester

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]					
					N150	1,90	29.3	801	2628	2,28	35.2	922	3025	
					N550	2,36	36.4	866	2841	2,71	41.8	977	3205	
					N160	2,42	37.3	846	2776	2,84	43.8	969	3179	
5,8	90	Lapua	Naturalis	67,0	2.638	N540	2,26	34.9	840	2756	2,53	39.0	945	3100
					N150	2,02	31.2	799	2621	2,39	36.9	903	2963	
					N550	2,44	37.7	846	2776	2,72	42.0	952	3123	
					N160	2,43	37.5	823	2700	2,85	44.0	942	3091	
5,8	90	Lapua	Scenar	68,3	2.689	N540	2,27	35.0	860	2822	2,54	39.2	962	3156
					N150	2,08	32.1	817	2680	2,44	37.7	914	2999	
					N550	2,46	38.0	865	2838	2,68	41.4	967	3173	
					N160	2,52	38.9	847	2779	2,83	43.7	952	3123	
5,8	90	Sierra	FMJ	68,3	2.689	N540	2,17	33.5	842	2762	2,49	38.4	946	3104
					N150	1,98	30.6	805	2641	2,30	35.5	902	2959	
					N550	2,31	35.6	848	2782	2,63	40.6	952	3123	
					N160	2,41	37.2	836	2743	2,76	42.6	941	3087	
5,8	90	Swift	Scirocco II	68,3	2.689	N550	2,17	33.5	788	2585	2,48	38.3	879	2884
					N555	2,20	34.0	786	2579	2,72	42.0	895	2936	
					N160	1,81	27.9	714	2343	2,27	35.0	819	2687	
					N165	2,20	34.0	768	2520	2,80	43.2	870	2854	
					N560	2,46	38.0	776	2546	2,81	43.4	879	2884	
6,2	95	Berger	Classic Hunter	68,1	2.681	N555	2,45	37.8	806	2644	2,75	42.4	898	2946
					N160	2,32	35.8	767	2516	2,67	41.2	862	2828	
					N165	2,71	41.8	804	2638	2,98	46.0	889	2917	
					N560	2,63	40.6	795	2608	2,89	44.6	887	2910	
6,2	95	Norma	FMJ	63,7	2.508	N550	2,25	34.7	777	2549	2,56	39.5	868	2848
					N555	2,36	36.4	787	2582	2,75	42.4	884	2900	
					N160	2,25	34.7	750	2461	2,65	40.9	844	2769	
					N165	2,68	41.4	787	2582	2,93	45.2	867	2844	
					N560	2,59	40.0	777	2549	2,85	44.0	866	2841	
6,2	96	Brenneke	TOG	67,0	2.638	N540	2,15	33.2	820	2690	2,50	38.6	928	3045
					N550	2,46	38.0	843	2766	2,68	41.4	939	3081	
					N160	2,60	40.1	824	2703	2,93	45.2	929	3048	
6,5	100	Speer	Grand Slam	68,3	2.689	N540	1,97	30.4	770	2526	2,33	36.0	878	2881
					N150	1,86	28.7	722	2369	2,23	34.4	839	2753	
					N550	2,21	34.1	787	2582	2,48	38.3	885	2904	
					N160	2,23	34.4	769	2523	2,58	39.8	873	2864	
6,8	105	Lapua	Scenar ¹⁾	68,3	2.689	N150	1,95	30.1	729	2392	2,27	35.0	821	2694
					N550	2,34	36.1	782	2566	2,59	40.0	890	2920	
					N160	2,43	37.5	766	2513	2,70	41.7	869	2851	
					N165	2,62	40.4	783	2569	3,00	46.3	894	2933	
7,0	108	Berger	BT Target	68,8	2.709	N550	2,14	33.0	747	2451	2,42	37.3	827	2713
					N555	2,30	35.5	750	2461	2,62	40.4	836	2743	
					N160	2,20	34.0	723	2372	2,60	40.1	817	2680	
					N165	2,51	38.7	747	2451	2,84	43.8	834	2736	
					N560	2,52	38.9	749	2457	2,80	43.2	838	2749	
7,0	108	Berger	Elite Hunter	68,8	2.709	N550	2,20	34.0	750	2461	2,49	38.4	837	2746
					N555	2,47	38.1	771	2530	2,71	41.8	849	2785	
					N160	2,36	36.4	731	2398	2,71	41.8	824	2703	
					N165	2,71	41.8	767	2516	2,96	45.7	843	2766	
					N560	2,55	39.4	758	2487	2,81	43.4	840	2756	
					N565	2,68	41.4	762	2500	2,94C	45.4C	843	2766	
7,1	109	Berger	Long Range Hybrid Target	71,0 ²⁾	2.795	N550	2,19	33.8	742	2434	2,48	38.3	829	2720
					N555	2,32	35.8	743	2438	2,71	41.8	840	2756	
					N160	2,06	31.8	698	2290	2,49	38.4	797	2615	

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.243 Winchester

cont.

Bullet				Powder	Starting load		Maximum load						
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity				
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]				
					N165	2,46	38.0	734	2408	2,92	45.1	834	2736
					N560	2,47	38.1	745	2444	2,80	43.2	838	2749
					N565	2,59	40.0	751	2464	2,92	45.1	838	2749

C = Compressed load ¹⁾The test barrel rifle twist 1 in 8" ²⁾The cartridge overall length exceeds the CIP maximum.

6 XC

Test barrel: 620 mm (24"), 1 in 8" twist
Primers: Large Rifle
Cases: Norma, trim-to length 48,20 mm (1.898")

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]					
3,8	58	Hornady	V-Max	62,0	2,441	N135	2,26	34.9	1045	3428	2,55	39.4	1162	3812
					N140	2,48	38.3	1056	3465	2,77	42.7	1175	3855	
					N550	2,54	39.2	1079	3540	2,82	43.5	1214	3983	
4,5	69	Sierra	MatchKing	63,0	2,480	N540	2,41	37.2	998	3274	2,66	41.1	1110	3642
					N150	2,21	34.1	939	3081	2,62	40.4	1066	3497	
					N550	2,05	31.6	768						

6 mm Remington

cont.

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
					N550	2,52	38.9	902	2959	2,82	43.5
					N160	2,49	38.4	866	2841	3,00	46.3
					N165	2,93	45.2	906	2972	3,30	50.9
								1010	3314	1018	3340

.240 Weatherby Magnum

Test barrel: 600 mm (23½"), 1 in 10" twist

Primers: Large Rifle Magnum

Cases: Norma, trim-to length 63,20 mm (2.488")

CAUTION: Loads less than the listed starting loads may cause excessive chamber pressure and must not be used!

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
4,9	75	Hornady	HP	78,1 3.075	N150	2,94	45.4	995	3266	3,17	48.9
					N550	3,20	49.4	1028	3371	3,38	52.2
					N160	3,34	51.6	1010	3314	3,52	54.2
5,0	77	Lapua	HP	78,1 3.075	N150	2,97	45.8	990	3248	3,15	48.7
					N550	3,20	49.3	1014	3327	3,37	51.9
					N160	3,34	51.5	1005	3297	3,51	54.1
5,8	90	Lapua	Scenar	78,1 3.075	N550	2,98	46.0	939	3081	3,22	49.6
					N160	3,20	49.3	938	3077	3,41	52.6
					N165	3,47	53.6	949	3114	3,71	57.2
6,5	100	Lapua	Mega	78,1 3.075	N550	2,94	45.4	891	2923	3,16	48.7
					N160	3,06	47.2	895	2936	3,26	50.3
					N165	3,47	53.6	949	3114	3,62	55.8
6,8	105	Speer	Spitzer	77,8 3.063	N160	2,83	43.6	852	2795	3,15	48.7
					N165	3,33	51.3	895	2936	3,57	55.2
					N560	3,23	49.8	887	2910	3,47	53.5

.25-06 Remington

Test barrel: 580 mm (23"), 1 in 10" twist

Primers: Large Rifle

Cases: Remington, trim-to length 63,10 mm (2.484")

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
5,6	87	Speer	SPBT	79,3 3.122	N140	2,35	36.2	876	2873	2,74	42.3
					N150	2,51	38.7	892	2925	2,91	44.9
					N160	3,15	48.6	935	3069	3,55	54.8
					N165	3,52	54.3	960	3149	3,95	60.9
6,5	100	Speer	SPBT	81,2 3.197	N140	2,60	40.0	873	2864	2,78	42.9
					N150	2,66	41.0	878	2881	2,86	44.1
					N160	3,24	50.0	911	2990	3,38	52.2
					N165	3,44	53.0	922	3024	3,66	56.5
					N560	3,16	48.8	900	2954	3,59	55.4
					N170	3,55	54.7	885	2902	4,05	62.5
7,8	120	Sierra	HPBT	80,0 3.155	N160	2,75	42.4	791	2597	3,09	47.7
					N165	3,03	46.8	817	2681	3,38	52.2
					N560	2,95	45.6	818	2685	3,33	51.4
					N170	3,35	51.7	817	2682	3,81	58.8
					N160	1,95	30.1	692	2270	2,32	35.8
7,8	120	Speer	Spitzer	80,2 3.157	N150	2,50	38.6	759	2491	2,94	45.4
					N165	2,69	41.5	777	2548	3,13	48.3
					N560	2,81	43.3	798	2619	3,24	50.0

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.25-06 Remington

cont.

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
					N170	3,17	48.9	802	2630	3,59	55.4

6,5 mm Grendel

Test barrel: 610 mm (24"), 1 in 10" twist

Primers: Small Rifle

Cases: Lapua, trim-to length 38,50 mm (1.516")

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
6,5	100	Lapua	FMJ	53,0 2.087	N130	1,32	20.4	705	2313	1,54	23.8
					N133	1,51	23.3	728	2388	1,72	26.5
					N530	1,56	24.1	729	2392	1,79	27.6
6,5	100	Lapua	Scenar	57,1 2.248	N130	1,40	21.6	674	2211	1,76	27.2
					N133	1,57	24.2	728	2388	1,90	29.3
					N530	1,60	24.7	729	2392	1,90	29.3
7,0	108	Lapua	Scenar	57,1 2.248	N130	1,40	21.6	671	2201	1,69	26.1
					N133	1,51	23.3	689	2260	1,80	27.8
					N530	1,44	22.2	690	2264	1,73	26.7
7,8	120	Barnes	TSX	53,0 2.087	N133	1,17	18.1	578	1896	1,58	24.4
					N530	1,34	20.7	592	1942	1,62	25.0
					N540	1,58	24.4	631	2070	1,88	29.0
8,0	123	Lapua	Scenar	57,1 2.248	N133	1,36	21.0	609	1998	1,73	26.7
					N530	1,47	22.7	635	2083	1,73	26.7
	</td										

6,5 x 47 Lapua

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]			
6,5	100	Lapua	Scenar	69,5	2.736	N133	2,10	32.4	870	2854	2,26	34.9	925	3035
						N135	2,20	34.0	890	2920	2,31	35.6	930	3051
						N140	2,40	37.0	900	2953	2,56	39.5	950	3117
						N540	2,32	35.8	874	2867	2,64	40.7	992	3255
						N150	2,17	33.5	831	2726	2,53	39.0	954	3130
						N135	2,04	31.5	814	2671	2,23	34.4	885	2904
7,0	108	Lapua	Scenar	69,5	2.736	N133	1,96	30.2	807	2648	2,20	33.9	882	2894
						N135	2,04	31.5	814	2671	2,23	34.4	885	2904
						N140	2,23	34.4	828	2717	2,51	38.7	910	2986
						N540	2,27	35.0	839	2753	2,55	39.4	943	3094
						N150	2,35	36.3	849	2785	2,63	40.6	930	3051
						N550	2,39	36.9	836	2743	2,68	41.4	948	3110
7,8	120	Barnes	TSX	64,5	2.539	N540	2,20	34.0	748	2454	2,48	38.3	846	2776
						N150	1,99	30.7	690	2264	2,43	37.5	830	2723
						N550	2,35	36.3	750	2461	2,70	41.7	872	2861
						N540	2,14	33.0	772	2533	2,45	37.8	889	2917
						N150	2,06	31.8	744	2441	2,43	37.5	859	2818
						N550	2,31	35.6	776	2546	2,62	40.4	895	2936
8,0	123	Lapua	Scenar	69,5	2.736	N140	2,15	33.2	768	2520	2,36	36.4	840	2756
						N540	2,31	35.7	818	2685	2,57	39.7	907	2976
						N150	2,23	34.4	788	2585	2,45	37.8	855	2805
						N550	2,26	34.9	780	2559	2,57	39.7	878	2881
						N540	1,95	30.1	715	2346	2,35	36.3	820	2690
						N150	2,01	31.0	727	2385	2,40	37.0	829	2720
8,4	130	Barnes	TSX	64,5	2.539	N540	2,08	32.1	691	2267	2,42	37.3	819	2687
						N150	1,81	27.9	597	1959	2,31	35.6	765	2510
						N550	2,23	34.4	694	2277	2,60	40.1	821	2694
						N540	2,12	32.7	732	2402	2,39	36.9	829	2720
						N150	2,03	31.3	699	2293	2,35	36.3	796	2612
						N550	2,29	35.3	735	2411	2,57	39.7	833	2733
9,0	139	Lapua	Scenar	69,5	2.736	N140	1,80	27.8	731	2398	2,30	35.5	792	2598
						N540	2,12	32.7	732	2402	2,39	36.9	829	2720
						N150	2,03	31.3	699	2293	2,35	36.3	796	2612
						N550	2,29	35.3	735	2411	2,57	39.7	833	2733
						N540	2,00	30.9	702	2302	2,25	34.7	773	2536
						N150	2,17	33.5	752	2468	2,42	37.4	836	2744
9,1	140	Lapua	Naturalis N563	66,0	2.598	N140	1,80	27.8	628	2060	2,11	32.6	738	2421
						N540	1,91	29.5	662	2172	2,21	34.1	774	2539
						N150	1,77	27.3	625	2051	2,11	32.6	738	2421
						N550	2,04	31.5	676	2218	2,37	36.6	786	2579
						N150	1,78	27.5	598	1962	2,12	32.7	710	2329
						N550	2,12	32.7	696	2283	2,43	37.5	769	2523

6,5 Creedmoor

Test barrel:	650 mm (25½"), 1 in 8" twist
Primers:	Small Rifle, Remington 7 1/2 BR
Cases:	Lapua, trim-to length 48,50 mm (1.909")

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]			
6,1	95	Hornady	V-Max	68,0	2.677	N140	2,50	38.6	906	2972	2,73	42.1	981	3219
						N540	2,55	39.4	927	3041	2,79	43.1	1013	3323
						N150	2,50	38.6	916	3005	2,73	42.1	981	3219
						N135	2,04	31.5	814	2671	2,23	34.4	885	2904
						N140	2,23	34.4	828	2717	2,51	38.7	910	2986
						N540	2,27	35.0	839	2753	2,55	39.4	943	3094

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

6,5 Creedmoor

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]			
6,5	100	Lapua	FMJ	64,4	2.535	N140	2,34	36.1	840	2756	2,61	40.3	919	3015
						N540	2,44	37.7	863	2831	2,69	41.5	952	3123
						N150</								

6,5 Creedmoor

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]					
					N160	2,50	38.6	790	2592	2,71	41.8	822	2697	
					N165	2,85	44.0	795	2608	2,90F	44.8F	808	2651	
					N560	2,67	41.2	765	2510	3,04	46.9	857	2812	
8,8	136	Lapua	Scenar-L	68,0	2.677	N540	2,10	32.4	739	2425	2,44	37.7	840	2756
					N150	2,08	32.1	724	2375	2,48	38.3	833	2733	
					N550	2,32	35.8	756	2480	2,66	41.1	865	2838	
					N555	2,60	40.1	791	2595	2,86C	44.1C	860	2822	
					N160	2,59	40.0	770	2526	2,98C	46.0C	870	2854	
9,0	139	Lapua	Scenar	69,0	2.717	N540	2,00	30.9	713	2339	2,38	36.7	817	2680
					N150	1,90	29.3	690	2264	2,30	35.5	793	2602	
					N550	2,20	34.0	735	2411	2,57	39.7	841	2759	
					N555	2,45	37.8	762	2500	2,76	42.6	838	2749	
					N160	2,14	33.0	700	2297	2,73	42.1	833	2733	
					N560	2,62	40.4	754	2474	2,88	44.4	832	2730	
9,1	140	Berger	Hybrid Target	69,0	2.717	N150	2,03	31.3	710	2329	2,29	35.3	778	2552
					N550	2,29	35.3	745	2444	2,53	39.0	816	2677	
					N555	2,60	40.1	779	2556	2,81	43.4	835	2740	
					N160	2,41	37.2	744	2441	2,71	41.8	813	2667	
					N560	2,66	41.1	758	2487	2,94	45.4	837	2746	
					N565	2,77	42.7	767	2516	3,05F	47.1F	833	2733	
9,1	140	Lapua	Naturalis N563	69,2	2.724	N540	1,88	29.0	671	2201	2,20	34.0	769	2523
					N150	1,67	25.8	605	1985	2,05	31.6	713	2339	
					N550	1,98	30.6	678	2224	2,33	36.0	776	2546	
9,1	140	Nosler	Accubond	71,0	2.795	N540	1,96	30.2	685	2247	2,30	35.5	790	2592
					N150	1,87	28.9	664	2178	2,27	35.0	770	2526	
					N550	2,08	32.1	697	2287	2,48	38.3	808	2651	
9,2	142	Sierra	HPBT	68,5	2.697	N150	1,97	30.4	684	2244	2,22	34.3	752	2467
					N550	2,30	35.5	737	2418	2,53	39.0	812	2664	
					N555	2,50	38.6	748	2454	2,72	42.0	818	2684	
					N160	2,38	36.7	718	2356	2,68	41.4	801	2628	
					N560	2,63	40.6	752	2467	2,86	44.1	828	2717	
					N565	2,75	42.4	751	2464	3,04	46.9	829	2720	
9,3	143	Hornady	ELD-X	68,8	2.709	N150	1,98	30.6	695	2280	2,23	34.4	763	2503
					N550	2,24	34.6	741	2431	2,44	37.7	801	2628	
					N555	2,45	37.8	742	2434	2,70	41.7	812	2664	
					N160	2,36	36.4	729	2392	2,68	41.4	801	2628	
					N560	2,63	40.6	749	2457	2,91	44.9	833	2733	
					N565	2,74	42.3	760	2493	3,05	47.1	824	2703	
9,3	144	Berger	Long Range Hybrid Target	71,0	2.795	N150	2,00	30.9	681	2234	2,29	35.3	750	2461
					N550	2,30	35.5	739	2425	2,53	39.0	808	2651	
					N555	2,57	39.7	778	2552	2,80	43.2	837	2746	
					N160	2,50	38.6	722	2369	2,79	43.1	804	2638	
					N560	2,70	41.7	767	2516	2,89	44.6	835	2740	
					N565	2,80	43.2	775	2543	3,05C	47.1C	837	2746	
9,3	144	Lapua	FMJBT	69,0	2.717	N540	1,85	28.5	674	2211	2,26	34.9	788	2585
					N150	1,79	27.6	662	2172	2,29	35.3	781	2562	
					N550	2,03	31.3	695	2280	2,44	37.7	812	2664	
					N555	2,40	37.0	732	2402	2,67	41.2	802	2631	
					N160	2,17	33.5	683	2241	2,61	40.3	782	2566	
					N560	2,57	39.7	737	2418	2,86	44.1	823	2700	
					N565	2,69	41.5	749	2457	2,96	45.7	821	2694	
9,9	153.5	Berger	Long Range Hybrid Target	71,0	2.795	N540	2,08	32.1	701	2300	2,33	36.0	770	2526
					N150	1,97	30.4	671	2201	2,22	34.3	739	2425	
					N550	2,26	34.9	709	2326	2,47	38.1	776	2546	

6,5 Creedmoor

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]					
					N555	2,45	37.8	729	2392	2,70	41.7	798	2618	
					N160	2,42	37.3	714	2343	2,68	41.4	783	2569	
					N165	2,72	42.0	746	2448	3,04C	46.9C	817	2680	
					N560	2,60	40.1	723	2372	2,84	43.8	800	2625	
					N565	2,70	41.7	737	2418	3,03C	46.8C	807	2648	
10,1	156	Lapua	Mega	68,5	2.697	N540	1,83	28.2	635	2083	2,20	34.0	739	2425
					N150	1,71	26.4	603	1978	2,17	33.5	727	2385	
					N550	1,99	30.7	656	2152	2,37	36.6	763	2503	
					N160	1,93	29.8	625	2051	2,48	38.3	754	2474	
10,1	156	Norma	Vulkan	69,0	2.717	N140	1,82	28.1	629	2064	2,05	31.6	690	2264
					N540	1,82	28.1	632	2073	2,13	32.9	714	2343	
					N150	1,76	27.2	618	2028	1,99	30.7	680	2231	
					N550	1,98	30.6	656	2152	2,30	35.5	739	2425	
					N160	2,23	34.4	676	2218	2,52	38.9	749	2457	
					N560	2,40	37.0	689	2260	2,66	41.1	764	2507	
					N565	2,52	38.9	703	2306	2,80	43.2	770	2526	

C = Compressed load F = Full load

.260 Remington

Test barrel: 475 mm (18¾"), 1 in 9" twist

Primers: Large Rifle

.260 Remington					cont.								
Bullet				Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
8,4	130	Barnes	TSX	70,8 2.787	N540	2,17	33.5	720	2362	2,44	37.7	810	2657
					N550	2,26	34.9	717	2352	2,59	40.0	816	2677
					N160	2,32	35.8	702	2303	2,75	42.4	808	2651
8,5	130	Berger	Hybrid OTM Tactical	71,0 2.795	N540	2,22	34.3	762	2500	2,51	38.7	844	2769
					N150	2,17	33.5	746	2448	2,46	38.0	821	2694
					N550	2,45	37.8	777	2549	2,70	41.7	855	2805
8,5	130	Berger	VLD Target	71,0 2.795	N160	2,71	41.8	786	2579	2,97	45.8	862	2828
					N140	2,11	32.6	739	2425	2,38	36.7	814	2671
					N540	2,19	33.8	761	2497	2,48	38.3	843	2766
8,5	130	Swift	Scirocco II	71,0 2.795	N150	2,09	32.3	741	2431	2,42	37.3	815	2674
					N550	2,46	38.0	778	2552	2,69	41.5	856	2808
					N555	2,59	40.0	792	2598	2,84	43.8	864	2835
8,5	130	Swift	Scirocco II	71,0 2.795	N140	2,06	31.8	719	2359	2,32	35.8	785	2575
					N540	2,12	32.7	734	2408	2,45	37.8	819	2687
					N150	2,02	31.2	722	2369	2,34	36.1	795	2608
8,8	135	Berger	Classic Hunter	71,0 2.795	N550	2,30	35.5	742	2434	2,60	40.1	828	2717
					N560	2,74	42.3	762	2500	3,00	46.3	846	2776
					N540	2,13	32.9	736	2415	2,42	37.3	819	2687
8,8 ¹⁾	136	Lapua	Scenar-L	71,0 2.795	N150	2,09	32.3	721	2365	2,37	36.6	799	2621
					N550	2,42	37.3	758	2487	2,65	40.9	833	2733
					N160	2,59	40.0	757	2484	2,85	44.0	830	2723
9,0	139	Lapua	Scenar	71,0 2.795	N560	2,79	43.1	768	2520	3,02	46.6	846	2776
					N550	2,47	38.1	755	2477	2,70	41.7	835	2740
					N160	2,71	41.8	758	2487	2,99	46.1	841	2759
9,0	139	Lapua	Scenar	71,0 2.795	N560	2,82	43.5	762	2500	3,10	47.8	843	2766
					N160	2,60	40.1	756	2480	2,81	43.4	815	2674
					N560	2,72	42.0	750	2461	2,99	46.1	830	2723
9,1	140	Berger	Elite Hunter	71,0 2.795	N150	2,05	31.6	702	2303	2,34	36.1	781	2562
					N550	2,35	36.3	738	2421	2,57	39.7	811	2661
					N160	2,53	36.3	736	2415	2,79	43.1	811	2661
9,1	140	Berger	VLD Target	71,0 2.795	N560	2,75	42.4	753	2470	2,99	46.1	834	2736
					N565	2,81	43.4	757	2484	3,17	48.9	838	2749
					N550	2,82	43.5	756	2480	3,13	48.3	833	2733
9,1	140	Lapua	Naturalis N507	73,3 2.886	N160	2,17	33.5	688	2257	2,54	39.2	776	2546
					N550	2,25	34.7	673	2208	2,61	40.3	766	2513
					N560	2,47	38.1	681	2234	2,84	43.8	779	2556
9,1	140	Lapua	Naturalis N563	70,0 2.756	N150	1,90	29.3	667	2188	2,20	34.0	747	2451
					N550	2,17	33.5	704	2310	2,49	38.4	793	2602
					N555	2,37	36.6	721	2365	2,69	41.5	797	2615
9,1 ¹⁾	140	Nosler	Accubond	70,0 2.756	N160	2,20	34.0	689	2260	2,62	40.4	787	2582
					N560	2,57	39.7	720	2362	2,92	45.1	817	2680
					N550	2,34	36.1	720	2362	2,65	40.9	811	2661
9,1 ¹⁾	140	Berger	A-Frame	71,0 2.795	N160	2,43	37.5	714	2343	2,85C	44.0C	796	2612
					N560	2,56	39.5	736	2415	2,90C	44.8C	823	2700
					N565	2,59	40.0	724	2375	2,92	45.1	801	2628

C = Compressed load F = Full load 1) Test barrel 600 mm (23½"), 1 in 9" twist

6,5 x 55 Swedish Mauser

Test barrel:	670 mm (26½"), 1 in 8½" twist
Primers:	Large Rifle
Cases:	Lapua, trim-to length 54,80 mm (2.157")

Bullet				Powder		Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.		Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm]	[in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
5,5	85	Sierra	HP	71,1	2.799	N150	2,88	44.5	937	3073	3,03	46.8	1013	3323
6,5	100	Lapua	FMJ	70,0	2.756	N530	2,34	36.1	880	2887	2,53	39.0	938	3077
						N135	2,21	34.1	802	2631	2,55A	39.3A	894	2933
						N140	2,38	36.7	810	2657	2,75	42.4	910	2986
						N540	2,71	41.8	910	2986	2,90	44.8	973	3192
						N150	2,45	37.8	823	2700	2,79	43.0	920	2690
						N160	3,08	47.5	862	2828	3,39	52.3	946	3104
6,5	100	Lapua	Scenar	75,0	2.953	N530	2,35	36.3	899	2949	2,54	39.2	951	3120
						N135	2,15	33.2	790	2592	2,44	37.6	889	2917
						N140	2,32	35.8	790	2592	2,64	40.7	915	3002
						N540	2,35	36.3	790	2592	2,70	41.7	924	3031
						N150	2,37	36.6	793	2602	2,69A	41.5A	870	2853
						N550	2,58	39.8	790	2592	2,97	45.8	938	3077
						N160	2,78	42.9	790	2592	3,01	46.4	928	3045
6,5	100	Sierra	HP	72,4	2.850	N140	2,62	40.4	860	2822	2,78	42.8	911	2990
						N540	2,65	40.9	858	2815	2,88	44.4	938	3078
						N150	2,69	41.5	860	2822	2,86	44.1	915	3003
						N550	2,82	43.5	884	2900	3,03	46.8	960	3150
						N160	3,13	48.3	878	2881	3,33	51.4	942	3090
7,0	108	Lapua	Scenar	78,0	3.071	N530	2,29	35.3	859	2818	2,48	38.3	912	2992
						N140	2,44	37.6	806	2644	2,64	40.8	880	2887
						N540	2,50	38.6	827	2713	2,69	41.5	897	2943
						N150	2,56	39.5	830	2723	2,69	41.5	870	2853
						N550	2,72	42.0	853	2798	2,94	45.4	936	3070
						N555	2,97	45.8	900	2953	3,16C	48.8C	957	3140

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

6,5 x 55 Swedish Mauser

cont.

Bullet				Powder	Starting load		Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity		
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
					N160	2,80	43.2	820	2690	3,05	47.1
					N165	3,16	48.8	860	2822	3,28F	50.7F
					N560	3,19	49.2	867	2843	3,35	51.7
7,8	120	Barnes	TSX	71,2	2.803	N160	2,72	42.0	815	2674	2,99
					N165	3,24	50.0	862	2828	3,40	52.5
					N560	3,06	47.2	838	2749	3,25	50.2
7,8	120	Lapua	Scenar-L	77,0	3.031	N135	2,08	32.1	763	2503	2,31
					N140	2,18	33.6	786	2579	2,42	37.3
					N150	2,31	35.6	800	2625	2,52	38.9
					N555	2,89	44.6	852	2795	3,05	47.1
					N160	2,84	43.8	842	2762	2,96	45.7
					N560	3,03	46.8	847	2779	3,23	49.8
7,8	120	Sierra	HPBT	76,8	3.024	N140	2,47	38.1	755	2477	2,63
					N540	2,49	38.4	773	2536	2,69	41.5
					N150	2,55	39.3	770	2526	2,71	41.7
					N550	2,63	40.6	800	2625	2,88	44.5
					N160	2,97	45.8	825	2707	3,29	50.7
					N560	3,12	48.1	823	2700	3,41	52.7
8,0	123	Lapua	Scenar	78,0	3.071	N530	2,17	33.5	792	2598	2,35
					N140	2,20	34.0	745	2444	2,40	37.0
					N540	2,44	37.7	749	2456	2,68	41.4
					N150	2,24	34.6	740	2428	2,47	38.1
					N550	2,67	41.2	837	2746	2,88	44.4
					N555	2,86	44.1	841	2759	3,04	46.9
					N160	2,69	41.5	807	2648	2,92	45.1
					N560	3,03	46.8	841	2759	3,19	49.2
8,4	130	Barnes	TSX	74,5	2.930	N160	2,29	35.3	726	2382	2,72
					N165	3,08	47.5	808	2651	3,32	51.2
					N560	2,92	45.1	796	2612	3,14	48.5
8,4	130	Norma	HPBT	80,0	3.150	N140	2,29	35.3	730	2395	2,64
					N540	2,32	35.8	749	2457	2,57	39.6
					N150	2,32	35.8	710	2329	2,60	40.1
					N550	2,54	39.2	768	2520	2,84	43.8
					N160	2,79	43.0	764	2507	3,06	47.3
					N560	3,01	46.4	803	2635	3,25	50.2
8,8	136	Lapua	Scenar-L	78,0	3.071	N540	2,39	36.9	785	2575	2,59
					N150	2,29	35.3	753	2470	2,46	38.0
					N550	2,57	39.7	800	2625	2,73	42.1
					N555	2,75	42.4	803	2635	2,94	45.4
					N160	2,73	42.1	778	2552	2,93	45.2
					N165	3,02	46.6	813	2667	3,20	49.4
					N560	2,90	44.8	802	2631	3,07	47.4
9,0	139	Lapua	Scenar	78,0	3.071	N540	2,35	36.3	764	2507	2,53
					N150	2,12	32.7	706	2316	2,28	35.2
					N550	2,37	36.6	737	2418	2,59	40.0
					N555	2,66	41.1	784	2572	2,84	43.8
					N160	2,40	37.0	732	2402	2,67	41.2
					N165	2,86	44.1	766	2513	3,10	47.8
					N560	2,73	42.1	736	2415	3,06	47.2
9,0	139	Norma	HPBT	78,0	3.071	N150	2,28	35.2	704	2310	2,55
					N550	2,50	38.6	743	2438	2,71	41.8
					N160	2,73	42.1	738	2421	2,98	46.0
					N165	3,00	46.3	765	2510	3,23	49.9
					N560	2,88	44.4	753	2470	3,20	49.4
											2777

6,5 x 55 Swedish Mauser

cont.

Bullet				Powder	Starting load		Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity		
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
9,1	140	Berger	Hybrid Target	80,0	3.150	N150	2,10	32.4	692	2270	2,33
					N550	2,40	37.0	729	2392	2,64	40.7
					N160	2,44	37.7	715	2346	2,69	41.5
					N165	2,85	44.0	754	2474	3,06	47.2
					N560	2,84	43.8	761	2497	3,07	47.4
					N565	2,93	45.2	773	2536	3,14	48.5
9,1	140	Lapua	Naturalis N563	75,0	2.953	N540	2,25	34.7	742	2434	2,47
					N150	2,03	31.3	695	2280	2,25	34.7
					N550	2,34	36.1	741	2431	2,59	40.0
					N160	2,32	35.8	723	2372	2,66	41.1
					N165	2,55	39.4	751	2464	3,00	46.3
					N560	2,71	41.8	763	2503	2,96	45.7
9,1	140	Sierra	HPBT	79,0	3.110	N150	2,35	36.3	703	2306	2,54
					N550	2,58	39.8	749	2457	2,73	42.1
					N160	2,81	43.4	759	2490	3,03	46.7
					N165	3,00	46.3	766	2513	3,24	50.0
					N560	2,93	45.2	779	2556	3,13	48.3
9,1	140	Swift	A-Frame	78,0	3.071	N150	1,65	25.5	585	1919	1,96
					N160	1,57	24.2	560	1837	2,02	31.2
					N560	2,25	34.7	668	2192	2,79	43.1
					N565	2,58	39.8	716	2349	2,87	44.3
9,3	144	Lapua	FMJBT	79,0	3.110	N150	2,04	31.5	659	2163	2,40
					N160	2,64	40.7	717	2352	2,85	44.0
					N165	2,70	41.7	720	2362	3,18	49.1
					N560	2,91	44.8	756	2479	3,15	48.6
					N170	3,08	47.5	715	2346	3,41C	52.6C
					N570	3,11	48.0	750	2461	3,22F	49.7F
10,0	155	Sierra	HPBT	79,0	3.110	N150	2,10	32.4	653	2142	2,33
					N550	2,36	36.4	689	2260	2,60	40.1
					N160	2,64	40.7	698	2290	2,97	45.9
					N165	2,75	42.4	690	2264	3,08	47.6
					N560	2,66	41.0	702	2303	2,93	45.2
					N170</						

6,5 x 55 SE / 6,5 x 55 SKAN					cont.									
Bullet					Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]				[g]	[grs]	[m/s]	[fps]		[g]	[grs]	[m/s]	[fps]	
					N140	2,35	36.3	800	2625	2,64	40.7	915	3002	
					N540	2,40	37.0	800	2625	2,70	41.7	924	3031	
					N150	2,42	37.3	800	2625	2,69	41.5	870	2854	
					N550	2,60	40.1	800	2625	2,97	45.8	938	3077	
					N160	2,80	43.2	800	2625	3,01	46.5	928	3045	
7,0	108	Lapua	GB464 Scenar	78,0	3.071	N140	2,32	35.8	796	2610	2,70	41.7	890	2921
					N540	2,66	41.1	842	2762	2,95	45.5	942	3091	
					N150	2,39	36.9	800	2624	2,78	42.9	898	2947	
					N550	2,80	43.2	849	2785	3,04	46.9	940	3084	
					N555	2,97	45.8	878	2881	3,16	48.8	935	3068	
					N160	2,81	43.4	837	2745	3,16	48.8	929	3047	
					N560	3,14	48.5	831	2726	3,50	54.0	949	3114	
7,8	120	Lapua	GB547 Scenar-L	77,0	3.031	N135	2,08	32.1	739	2425	2,43	37.5	829	2720
					N140	2,18	33.6	761	2497	2,59	40.0	844	2769	
					N540	2,32	35.8	800	2625	2,81	43.4	890	2920	
					N150	2,31	35.6	751	2464	2,65	40.9	841	2759	
					N550	2,62	40.4	816	2677	2,95	45.5	894	2933	
					N555	2,89	44.6	836	2743	3,20	49.4	915	3002	
					N160	2,84	43.8	772	2533	3,07	47.4	857	2812	
					N560	3,03	46.8	810	2657	3,32	51.2	901	2956	
8,0	123	Lapua	GB489 Scenar	78,0	3.071	N140	2,20	34.0	750	2462	2,55	39.4	833	2734
					N540	2,47	38.1	788	2586	2,79	43.1	881	2892	
					N150	2,24	34.6	741	2432	2,60	40.1	830	2724	
					N550	2,67	41.2	805	2641	2,94	45.4	883	2895	
					N555	2,86	44.1	812	2664	3,17	48.9	909	2982	
					N160	2,71	41.8	763	2502	3,02	46.6	845	2773	
					N560	3,04	46.9	801	2628	3,27	50.5	888	2913	
8,8	136	Lapua	GB546 Scenar-L	78,0	3.071	N540	2,39	36.9	736	2415	2,72	42.0	841	2759
					N150	2,29	35.3	711	2333	2,58	39.8	821	2694	
					N550	2,57	39.7	757	2484	2,80	43.2	856	2808	
					N555	2,75	42.4	789	2589	3,09	47.7	877	2877	
					N160	2,73	42.1	741	2431	3,05	47.1	852	2795	
					N165	3,02	46.6	779	2556	3,30C	50.9C	868	2848	
					N560	2,90	44.8	786	2579	3,20	49.4	884	2900	
9,0	139	Lapua	GB458 Scenar	78,0	3.071	N150	2,12	32.7	696	2284	2,40	37.0	781	2563
					N550	2,37	36.6	738	2421	2,72	42.0	825	2705	
					N555	2,66	41.1	769	2523	2,99	46.1	873	2864	
					N160	2,41	37.2	723	2373	2,84	43.8	817	2679	
					N165	2,86	44.1	758	2488	3,25	50.2	847	2777	
					N560	2,87	44.3	771	2529	3,18	49.1	866	2842	

Barrel length: 700 mm, 27½"

Bullet					Powder		Starting load				Maximum load			
Weight		Mfg	Type/Name	C.O.L.		Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm]	[in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
7,0	108	Lapua	GB464 Scenar	78,0	3.071	N140	2,32	35.8	804	2639	2,70	41.7	900	2953
						N540	2,66	41.1	852	2795	2,95	45.5	953	3128
						N150	2,39	36.9	809	2654	2,78	42.9	908	2980
						N550	2,80	43.2	858	2815	3,04	46.9	948	3109
						N555	2,97	45.8	889	2917	3,16	48.8	945	3100
						N160	2,81	43.4	844	2769	3,16	48.8	937	3074
						N560	3,14	48.5	839	2753	3,50	54.0	959	3146
7,8	120	Lapua	GB547 Scenar-L	77,0	3.031	N135	2,08	32.1	744	2441	2,43	37.5	834	2736

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

6,5 x 55 SE / 6,5 x 55 SKAN					cont.								
Bullet					Powder	Starting load				Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
					N140	2,18	33.6	767	2516	2,59	40.0	849	2785
					N540	2,32	35.8	801	2628	2,81	43.4	898	2946
					N150	2,31	35.6	754	2474	2,65	40.9	848	2782
					N550	2,62	40.4	820	2690	2,95	45.5	904	2966
					N555	2,89	44.6	842	2762	3,20	49.4	931	3054
					N160	2,84	43.8	784	2572	3,07	47.4	874	2867
					N560	3,03	46.8	820	2690	3,32	51.2	916	3005
8,0	123	Lapua	GB489 Scenar	78,0 3.071	N140	2,20	34.0	755	2477	2,55	39.4	838	2750
					N540	2,47	38.1	795	2607	2,79	43.1	889	2915
					N150	2,24	34.6	748	2454	2,60	40.1	838	2749
					N550	2,67	41.2	816	2676	2,94	45.4	894	2934
					N555	2,86	44.1	833	2733	3,17	48.9	922	3025
					N160	2,71	41.8	779	2557	3,02	46.6	864	2835
					N560	3,04	46.9	814	2669	3,27	50.5	902	2958
8,8	136	Lapua	GB546 Scenar-L	78,0 3.071	N540	2,39	36.9	742	2434	2,72	42.0	846	2776
					N150	2,29	35.3	718	2356	2,58	39.8	824	2703
					N550	2,57	39.7	763	2503	2,80	43.2	862	2828
					N555	2,75	42.4	795	2608	3,09	47.7	884	2900
					N160	2,73	42.1	748	2454	3,05	47.1	857	2812
					N165	3,02	46.6	787	2582	3,30	50.9	876	2874
					N560	2,90	44.8	794	2605	3,20	49.4	892	2927
9,0	139	Lapua	GB458 Scenar	78,0 3.071	N150	2,12	32.7	699	2295	2,40	37.0	785	2575
					N550	2,37	36.6	743	2438	2,72	42.0	830	2724
					N555	2,66	41.1	775	2543	2,99	46.1	881	2890
					N160	2,41	37.2	730	2395	2,84	43.8	824	2704
					N165	2,86	44.1	765	2508	3,25	50.2	854	2801
					N560	2,87	44.3	776	2546	3,18	49.1	872	2862

Barrel length: 740 mm, 29"

Bullet					Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
7,0	108	Lapua	GB464 Scenar	78,0	3.071	N140	2,32	35.8	816	2677	2,70	41.7	913	2995
						N540	2,66	41.1	865	2838	2,95	45.5	968	3176
						N150	2,39	36.9	821	2694	2,78	42.9	922	3025
						N550	2,80	43.2	870	2854	3,04	46.9	961	3153
						N555	2,97	45.8	900	2953	3,16	48.8	957	3140
						N160	2,81	43.4	854	2802	3,16	48.8	948	3110
						N560	3,14	48.5	850	2789	3,50	54.0	972	3189
7,8	120	Lapua	GB547 Scenar-L	77,0	3.031	N135	2,08	32.1	752	2467	2,43	37.5	842	2762
						N140	2,18	33.6	774	2539	2,59	40.0	856	2808
						N540	2,32	35.8	807	2648	2,81	43.4	907	2976
						N150	2,31	35.6	761	2497	2,65	40.9	856	2808
						N550	2,62	40.4	827	2713	2,95	45.5	917	3009
						N555	2,89	44.6	852	2795	3,20	49.4	946	3104
						N160	2,84	43.8	791	2595	3,07	47.4	899	2949
						N560	3,03	46.8	828	2717	3,32	51.2	932	3058
8,0	123	Lapua	GB489 Scenar	78,0	3.071	N140	2,20	34.0	761	2497	2,55	39.4	845	2772
						N540	2,47	38.1	803	2635	2,79	43.1	898	2946
						N150	2,24	34.6	757	2484	2,60	40.1	848	2782
						N550	2,67	41.2	830	2723	2,94	45.4	910	2986
						N555	2,86	44.1	841	2759	3,17	48.9	940	3084
						N160	2,71	41.8	802	2631	3,02	46.6	889	2917

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

6,5 x 55 SE / 6,5 x 55 SKAN

cont.

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
					N560	3,04	46.9	830	2723	3,27	50.5
8,8	136	Lapua	GB546 Scenar-L	78,0 3.071	N540	2,39	36.9	749	2457	2,72	42.0
					N150	2,29	35.3	726	2382	2,58	39.8
					N550	2,57	39.7	769	2523	2,80	43.2
					N555	2,75	42.4	803	2635	3,09	47.7
					N160	2,73	42.1	755	2477	3,05	47.1
					N165	3,02	46.6	795	2608	3,30	50.9
					N560	2,90	44.8	801	2628	3,20	49.4
9,0	139	Lapua	GB458 Scenar	78,0 3.071	N150	2,12	32.7	704	2310	2,40	37.0
					N550	2,37	36.6	750	2461	2,72	42.0
					N555	2,66	41.1	784	2572	2,99	46.1
					N160	2,41	37.2	735	2411	2,84	43.8
					N165	2,86	44.1	773	2536	3,25	50.2
					N560	2,87	44.3	783	2569	3,18	49.1
C = Compressed load											

6,5 - 284 Norma

Test barrel: 660 mm (26"), 1 in 9" twist

Primers: Large Rifle

Cases: Lapua, trim-to length 54,90 mm (2.161")

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
6,5	100	Lapua	FMJ	70,0 2.756	N150	2,71	41.8	872	2861	3,22	49.7
					N550	3,09	47.7	895	2936	3,48	53.7
					N160	3,08	47.5	855	2805	3,77	58.2
6,5	100	Lapua	Scenar	75,0 2.953	N150	2,79	43.1	910	2986	3,23	49.8
					N550	3,08	47.5	892	2927	3,48	53.7
					N160	3,10	47.8	865	2838	3,77	58.2
7,0	108	Lapua	Scenar	79,0 3.110	N550	2,97	45.8	920	3018	3,39	52.3
					N160	3,08	47.5	906	2972	3,49	53.9
					N165	3,52	54.3	922	3025	4,04	62.4
					N560	3,47	53.5	927	3041	3,81	58.9
7,8	120	Lapua	Scenar-L	79,0 3.110	N550	2,83	43.7	822	2697	3,26	50.3
					N160	2,86	44.1	801	2628	3,53	54.5
					N165	3,40	52.5	834	2736	3,80	58.6
					N560	3,32	51.2	831	2726	3,73	57.6
8,0	123	Lapua	Scenar	79,0 3.110	N160	2,59	40.0	795	2608	3,29	50.8
					N165	3,03	46.8	830	2723	3,65	56.4
					N560	3,28	50.6	867	2844	3,65	56.3
8,8	136	Lapua	Scenar-L	79,0 3.110	N550	2,75	42.4	770	2526	3,13	48.3
					N160	2,83	43.7	754	2474	3,38	52.2
					N165	3,26	50.3	783	2569	3,65	56.3
					N560	3,22	49.7	795	2608	3,62	55.9
9,0	139	Lapua	Scenar	79,0 3.110	N160	2,80	43.2	772	2533	3,06	47.2
					N165	3,12	48.1	793	2602	3,63	56.0
9,1	140	Lapua	Naturalis N507	74,7 2.941	N160	2,87	44.3	753	2470	3,20	49.4
					N165	3,17	48.9	768	2520	3,55	54.8
					N560	3,21	49.5	786	2579	3,55	54.8
9,1	140	Lapua	Naturalis N563	75,0 2.953	N550	2,58	39.8	737	2418	3,01	46.5
					N160	2,61	40.3	713	2339	3,12	48.1
					N165	2,57	39.7	702	2303	3,43	52.9
9,3	144	Lapua	FMJBT	79,0 3.110	N160	2,80	43.2	783	2569	3,14	48.5
					N560	2,88	44.4	737	2418	3,44	53.1

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

6,5 - 284 Norma

cont.

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
					N165	2,90	44.7	766	2513	3,61	55.7
					N560	3,18	49.1	802	2631	3,43	52.9
					N570	3,54	54.6	798	2618	3,70F	57.1F
10,1	156	Lapua	Mega	74,0 2.913	N560	3,09	47.7	755	2477	3,45	53.2
					N570	3,46	53.4	781	2562	3,65	56.3

F = Full load

.270 WSM

Test barrel: 520 mm (20½"), 1 in 9" twist

Primers: Large Rifle Magnum

Cases: Winchester, trim-to length 53,10 mm (2.091")

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
5,8	90	Sierra	HP	68,6 2.701	N160	4,00	61.7	1021	3350	4,47	69.0
					N165	4,59	70.8	1041	3415	4,75F	73.3F
					N560	4,39	67.7	1020	3346	4,78	73.8
9,1	140	Barnes	XFB	71,0 2.795	N160	3,20	49.4	800	2625	3,71	57.2
					N165	3,75	57.9	832	2730	4,10	63.3
					N560	3,49	53.9	806	2644	3,93	60.6
10,4	160	Nosler	Partition	71,0 2.795	N160	3,20	49.4	737	2418	3,47	53.5
					N165	3,30	50.9	769	2523	3,90	60.2
					N560	3,36	51.8	774	2539	3,82	58.9

.270 Winchester

Test barrel: 620 mm (24¾"), 1 in 10

.270 Winchester

cont.

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]
					N165	3,10	47.8	734 2408	3,74	57.7	870 2854
					N560	3,13	48.3	742 2434	3,66	56.5	870 2854
10,4	160	Nosler	Partition	84,6 3.331	N160	2,50	38.6	699 2293	2,89	44.6	781 2562
					N165	2,88	44.4	735 2411	3,31	51.1	811 2661
					N560	3,01	46.5	745 2444	3,42	52.8	847 2779

C = Compressed load

.270 Weatherby Magnum

Test barrel:	650 mm (25½"), 1 in 12" twist
Primers:	Large Rifle Magnum
Cases:	Remington, trim-to length 64,30 mm (2.531")

CAUTION: Loads less than the listed starting load may cause excessive chamber pressure and must not be used!

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]
6,5	100	Remington	PSP	79,0 3.110	N550	4,33	66.8	1037 3401	4,64	71.7	1117 3666
					N160	4,60	71.0	1043 3421	4,85	74.9	1108 3634
					N165	5,08	78.4	1045 3428	5,38	83.0	1115 3658
8,5	130	Remington	PSPCL	82,2 3.236	N160	4,31	66.5	939 3080	4,61	71.1	1001 3284
					N165	4,62	71.3	931 3055	4,93	76.0	997 3270
					N560	4,71	72.7	947 3108	4,98	76.9	1004 3294
8,7	135	Sierra	HPBT	83,0 3.268	N160	4,21	65.0	903 2964	4,43	68.3	965 3167
					N165	4,55	70.2	923 3029	4,70	72.5	989 3244
					N560	4,61	71.2	956 3137	4,81	74.2	1013 3323
9,7	150	Nosler	Partition	82,5 3.248	N165	4,34	67.0	877 2876	4,68	72.2	936 3072
					N560	4,38	67.6	900 2954	4,60	71.0	955 3134
					N170	4,76	73.4	886 2906	5,11	78.8	955 3134

7 mm-08 Remington

Test barrel:	610 mm (24"), 1 in 9½" twist
Primers:	Large Rifle
Cases:	Lapua, .308 Win. necked down, trim-to length 51,5 mm (2.028")

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]
7,8	120	Sierra	SP	69,5 2.736	N135	2,33	36.0	822 2697	2,66	41.1	915 3002
					N140	2,64	40.7	865 2838	2,90	44.8	934 3064
					N540	2,68	41.4	867 2844	2,95	45.5	956 3136
					N150	2,71	41.8	861 2825	2,97	45.8	936 3071
8,4	130	Sierra	HPBT	70,6 2.780	N135	2,30	35.5	796 2612	2,48	38.3	855 2805
					N140	2,49	38.4	812 2664	2,71	41.8	882 2894
					N540	2,63	40.6	850 2789	2,83	43.7	918 3012
					N150	2,62	40.4	825 2707	2,85	44.0	899 2949
9,1	140	Nosler	Ballistic Tip	69,6 2.740	N135	2,21	34.1	759 2490	2,42	37.3	826 2710
					N140	2,40	37.0	773 2536	2,66	41.1	852 2795
					N540	2,54	39.2	801 2628	2,77	42.7	877 2877
					N150	2,55	39.4	791 2595	2,79	43.1	861 2825
9,7	150	Barnes	TSX	69,5 2.736	N540	2,42	37.3	741 2431	2,66	41.1	824 2703
					N550	2,60	40.1	740 2428	2,88	44.4	825 2707
					N160	2,85	44.0	755 2477	3,05	47.1	807 2648
9,7	150	Lapua	Scenar-L	71,0 2.795	N140	2,22	34.3	723 2372	2,44	37.7	792 2598
					N540	2,31	35.6	750 2461	2,54	39.2	823 2700
					N150	2,23	34.4	731 2398	2,47	38.1	794 2605

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

7mm-08 Remington

cont.

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]
					N550	2,44	37.7	746 2448	2,71	41.8	833 2733
9,7	150	Sierra	MatchKing	69,5 2.736	N140	2,26	34.9	728 2388	2,57	39.7	813 2667
					N540	2,44	37.7	762 2500	2,69	41.5	843 2766
					N150	2,36	36.4	737 2418	2,69	41.5	824 2703
					N550	2,65	40.9	769 2523	2,88	44.4	851 2792
10,1	155	Lapua	Naturalis N564	70,0 2.756	N540	2,21	34.1	694 2277	2,50	38.6	776 2546
					N150	2,09	32.3	662 2172	2,40	37.0	740 2428
					N550	2,32	35.8	690 2264	2,61	40.3	774 2539
10,4	160	Lapua	Naturalis	69,5 2.736	N540	2,16	33.3	693 2274	2,38	36.7	761 2497
					N150	2,04	31.5	659 2162	2,31	35.6	730 2395
					N550	2,32	35.8	697 2287	2,55	39.4	766 2513
10,4	160	Sierra	SBT	70,5 2.776	N540	2,24	34.6	717 2352	2,53	39.0	793 2602
					N150	2,19	33.8	694 2277	2,49	38.4	766 2513
					N550	2,43	37.5	716 2349	2,71	41.8	802 2631
10,9	168	Sierra	HPBT	70,9 2.791	N540	2,34	36.1	723 2372	2,57	45.8	806 2644
					N150	2,21	34.1	680 2231	2,58	39.8	778 2552
					N550	2,55	39.4	729 2392	2,77	42.7	798 2618
11,3	175	Barnes	TSX	69,5 2.736	N150	2,03	31.3	606 1988	2,34	36.1	688

.284 Winchester

cont.

Bullet				Powder	Starting load			Maximum load						
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]			
9,7	150	Hornady	ELD-X ¹⁾	74,0	2.913	N150	2,60	40.1	762	2500	2,99	46.1	834	2736
						N550	3,00	46.3	797	2615	3,30	50.9	869	2851
						N555	3,30	50.9	822	2697	3,62	55.9	890	2920
						N160	3,28	50.6	793	2602	3,62	55.9	872	2861
						N560	3,50	54.0	796	2612	3,90	60.2	893	2930
				73,5 ¹⁾	2.894	N540	2,60	40.1	757	2484	3,02	46.6	855	2805
9,7	150	Lapua	Scenar-L			N150	2,55	39.4	754	2474	3,00	46.3	835	2740
						N550	2,92	45.1	783	2569	3,24	50.0	868	2848
						N555	3,20	49.4	806	2644	3,51	54.2	882	2894
						N160	3,24	50.0	785	2575	3,60	55.6	873	2864
						N560	3,38	52.2	789	2589	3,74	57.7	887	2910
				72,5 ¹⁾	2.854	N540	2,55	39.4	709	2326	2,88	44.4	793	2602
10,1	155	Lapua	Naturalis N564			N150	2,55	39.4	718	2356	2,80	43.2	761	2497
						N550	2,85	44.0	740	2428	3,17	48.9	818	2684
						N555	3,05	47.1	750	2461	3,48	53.7	840	2756
						N160	2,61	40.3	672	2205	3,40	52.5	809	2654
						N560	3,30	50.9	750	2461	3,70	57.1	841	2759
				74,0	2.913	N150	2,60	40.1	754	2474	2,93	45.2	808	2651
10,5	162	Hornady	ELD Match ¹⁾			N550	2,87	44.3	760	2493	3,22	49.7	843	2766
						N555	3,15	48.6	778	2552	3,49	53.9	853	2799
						N160	3,20	49.4	766	2513	3,56	54.9	847	2779
						N560	3,40	52.5	771	2530	3,78	58.3	859	2818
				71,0	2.795	N150	2,62	40.4	724	2375	2,97	45.8	801	2628
						N550	2,95	45.5	754	2474	3,23	49.8	832	2730
10,9	168	Berger	Classic Hunter			N555	3,20	49.4	769	2523	3,59	55.4	851	2792
						N160	3,16	48.8	754	2474	3,53	54.5	837	2746
						N560	3,39	52.3	755	2477	3,81	58.8	851	2792
				71,0	2.795	N550	2,81	43.4	742	2434	3,15	48.6	825	2707
						N555	3,10	47.8	762	2500	3,44	53.1	838	2749
						N160	3,13	48.3	748	2454	3,48	53.7	831	2726
10,9	168	Sierra	HPBT			N560	3,35	51.7	757	2484	3,76	58.0	851	2792
						N550	2,83	43.7	728	2388	3,17	48.9	810	2657
						N555	3,12	48.1	747	2451	3,52	54.3	829	2720
						N160	3,18	49.1	741	2431	3,51	54.2	821	2694
						N560	3,33	51.4	742	2434	3,75	57.9	836	2743
				74,0	2.913	N550	2,83	43.7	728	2388	3,17	48.9	810	2657
11,3	175	Berger	Elite Hunter ¹⁾			N555	3,12	48.1	747	2451	3,52	54.3	829	2720
						N160	3,18	49.1	741	2431	3,51	54.2	821	2694
						N560	3,33	51.4	742	2434	3,75	57.9	836	2743
				74,0 ¹⁾	2.913	N150	2,55	39.4	706	2316	2,70	41.7	737	2418
						N550	2,67	41.2	692	2270	3,01	46.5	777	2549
						N555	2,96	45.7	715	2346	3,28	50.6	791	2595
11,7	180	Lapua	Scenar-L			N160	2,95	45.5	699	2293	3,31	51.1	780	2559
						N165	3,30	50.9	722	2369	3,74C	57.7C	808	2651
						N560	3,20	49.4	726	2382	3,58	55.2	811	2661
						N565	3,35	51.7	741	2431	3,74	57.7	808	2651
				74,0 ¹⁾	2.913	N150	2,55	39.4	706	2316	2,70	41.7	737	2418
						N550	2,67	41.2	692	2270	3,01	46.5	777	2549
C = Compressed load F = Full load ¹⁾ The cartridge overall length exceeds the CIP maximum.														

7x57

Test barrel: 550 mm (22"), 1 in 9½" twist

Primers: Large Rifle

Cases: Sako, trim-to length 56,80 mm (2.236")

Bullet				Powder	Starting load			Maximum load						
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]			
7,8	120	Sierra	Spitzer	76,5	3.012	N135	2,67	41.1	814	2670	2,87	44.2	880	2887
						N140	2,82	43.5	824	2704	3,06	47.2	897	2942
						N150	2,85	44.0	828	2717	3,09	47.6	898	2946

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

7x57

cont.

Bullet				Powder	Starting load			Maximum load			
Weight											

7 x 64

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
					N550	3,04	46.9	802	2631	3,32	51.2	889	2917	
					N160	3,31	51.1	797	2615	3,60	55.6	889	2917	
					N560	3,56	54.9	811	2661	3,88	59.9	909	2982	
9,7	150	Barnes	TSX	83,8	3.299	N540	2,74	42.3	753	2470	3,06	47.2	846	2776
					N150	2,65	40.9	721	2365	2,99	46.1	813	2667	
					N550	2,94	45.4	765	2510	3,24	50.0	855	2805	
					N160	3,19	49.2	760	2493	3,61	55.7	861	2825	
					N560	3,52	54.3	787	2582	3,91	60.3	892	2927	
9,7	150	Lapua	Scenar-L	84,0	3.307	N540	2,71	41.8	779	2556	3,03	46.8	866	2841
					N150	2,64	40.7	757	2484	3,01	46.5	845	2772	
					N550	2,92	45.1	787	2582	3,16	48.8	867	2844	
					N160	3,22	49.7	794	2605	3,57	55.1	881	2890	
					N560	3,33	51.4	796	2612	3,65	56.3	884	2900	
9,7	150	Nosler	Partition	83,8	3.299	N540	2,68	41.4	774	2539	3,14	48.5	871	2858
					N150	2,66	41.1	758	2487	3,09	47.7	843	2766	
					N550	3,04	46.9	795	2608	3,33	51.4	871	2858	
					N160	3,30	50.9	790	2592	3,59	55.4	874	2867	
					N560	3,43	52.9	800	2625	3,76	58.0	888	2913	
10,1	155	Lapua	Naturalis N564	83,0	3.268	N150	2,60	40.1	736	2415	2,96	45.7	816	2677
					N550	2,81	43.4	750	2461	3,16	48.8	840	2756	
					N160	3,19	49.2	764	2507	3,52	54.3	837	2746	
					N560	3,33	51.4	747	2451	3,71	57.3	866	2841	
10,4	160	Nosler	Accubond	84,0	3.307	N540	2,64	40.7	746	2448	3,04	46.9	835	2740
					N150	2,56	39.5	731	2398	2,99	46.1	810	2657	
					N550	2,92	45.1	759	2490	3,20	49.4	839	2753	
					N160	3,27	50.5	767	2516	3,60C	55.6C	854	2802	
11,3	174	Barnes	TSX	81,3	3.201	N540	2,44	37.7	655	2149	2,95	45.5	765	2510
					N550	2,78	42.9	675	2215	3,24	50.0	784	2572	
					N160	3,04	46.9	676	2218	3,47	53.6	781	2562	
11,3	174	Sierra	Game King	84,0	3.307	N540	2,57	39.7	718	2356	2,98	46.0	803	2635
					N550	2,84	43.8	733	2405	3,09	47.7	805	2641	
					N160	3,12	48.1	737	2418	3,41	52.6	812	2664	
					N165	3,40	52.5	752	2467	3,75C	57.9C	823	2700	
					N560	3,31	51.1	750	2461	3,70	57.1	837	2746	
11,5	177	Brenneke	TIG	82,3	3.240	N540	2,53	39.0	687	2254	2,92	45.1	774	2539
					N550	2,81	43.4	701	2300	3,11	48.0	783	2569	
					N160	3,06	47.2	703	2306	3,46	53.4	791	2595	
					N165	3,43	52.9	724	2375	3,80C	58.6C	815	2674	
					N560	3,31	51.1	730	2395	3,72	57.4	814	2671	
11,7	180	Lapua	Scenar-L	84,0	3.307	N540	2,57	39.7	702	2303	2,86	44.1	781	2562
					N550	2,75	42.4	701	2300	3,02	46.6	787	2582	
					N160	3,04	46.9	716	2349	3,40	52.5	799	2621	
					N165	3,41	52.6	743	2438	3,60	55.6	789	2589	
					N560	3,20	49.4	701	2300	3,66	56.6	821	2694	

C = Compressed load

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

7 x 65R

Test barrel:	660 mm (26"), 1 in 9" twist
Primers:	Large Rifle
Cases:	Lapua, trim-to length 64,8 mm (2.551")

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]					
7,8	120	Nosler	Ballistic Tip	83,5	3.287	N540	3,01	46.5	886	2907	3,27	50.5	966	3169
						N150	2,89	44.6	852	2795	3,15	48.6	931	3054
						N550	3,18	49.1	883	2897	3,42	52.8	964	3163
						N160	3,50	54.0	885	2904	3,72	57.4	958	3143
9,1	140	Swift	A-Frame	82,3	3.240	N540	2,76	42.6	787	2582	3,12	48.1	872	2861
						N150	2,66	41.1	757	2484	2,98	46.0	831	2726
						N550	3,01	46.5	799	2621	3,24	50.0	871	2858
9,7	150	Barnes	TSX	83,5	3.287	N540	2,73	42.1	754	2474	3,00	46.3	834	2736
						N150	2,59	40.0	716	2349	2,90	44.8	796	2612
						N550	2,90	44.8	765	2510	3,15	48.6	841	2759
						N160	3,20	49.4	756	2480	3,49	53.9	835	2740
						N560	3,49	53.9	783	2569	3,74	57.7	863	2831
9,7	150	Lapua	Scenar-L	82,3	3.240	N540	2,70	41.7	783	2569	3,00	46.3	856	2808
						N150	2,62	40.4	756	2480	2,94	45.4	829	2720
						N550	2,93	45.2	793	2602	3,12	48.1	858	2815
						N160	3,22	49.7	793	2602	3,49	53.9	868	2848
9,7	150	Nosler	Partition	83,5	3.287	N540	2,67	41.2	770	2526	3,05	47.1	849	2785
						N150	2,64	40.7	750	2461	2,96	45.7	820	2690
						N550	2,99	46.1	788	2585	3,24	50.0	856	2808
10,1	156	Lapua	Naturalis	83,5	3.287	N540	2,71	41.8	742	2434	2,94	45.4	809	2654
						N150	2,59	40.0	714	2343	2,84	43.8	777	2549
						N550	2,86	44.1	750	2461	3,07	47.4	808	2651
						N160	3,10	47.8	709	2326	3,41	52.6	809	2654
						N560	3,35</							

7 mm WSM

Test barrel:	660 mm (26"), 1 in 9.5" twist						
Primers:	Large Rifle Magnum						
Cases:	Winchester, trim-to length 53,15 mm (2.093")						

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]			
7,1	110	Speer	TNT-HP	71,7	2.823	N150	3,44	53.1	965	3166	3,95	61.0	1062	3484
				N550		3,88	59.9	987	3238	4,24	65.4	1086	3563	
				N160		4,19	64.7	986	3235	4,62	71.3	1069	3507	
9,1	140	Nosler	Partition	71,9	2.831	N160	3,46	53.4	855	2805	4,00	61.7	957	3140
				N165		4,06	62.7	885	2904	4,50	69.4	970	3182	
				N560		3,80	58.6	876	2874	4,34	67.0	979	3212	
10,0	154	Hornady	Interbond	71,9	2.831	N160	3,39	52.3	819	2687	3,92	60.5	912	2992
				N165		3,88	59.9	842	2762	4,51	69.6	941	3087	
				N560		3,70	57.1	841	2759	4,25	65.6	946	3104	
10,4	160	Lapua	Naturalis	71,4	2.811	N160	2,93	45.2	782	2566	3,56	54.9	843	2766
				N165		3,34	51.5	763	2503	3,90	60.2	859	2818	
				N560		3,38	52.2	779	2556	3,85	59.4	878	2881	
10,4	160	Sierra	SBT	72,4	2.850	N160	3,38	52.2	796	2612	3,93	60.6	892	2927
				N165		3,91	60.3	834	2736	4,31	66.5	914	2999	
				N560		3,70	57.1	827	2713	4,15	64.0	922	3025	

7 mm Remington Magnum

Test barrel:	610 mm (24"), 1 in 9" twist						
Primers:	Large Rifle Magnum						
Cases:	Lapua, trim-to length 63,30 mm (2.492")						

CAUTION: Loads less than the listed starting load may cause excessive chamber pressure and must not be used!

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]			
9,1	140	Swift	A-Frame	83,0	3.268	N160	3,45	53.2	828	2717	4,03	62.2	935	3068
				N165		3,88	59.9	863	2831	4,37	67.4	955	3133	
				N560		3,84	59.3	852	2795	4,36	67.3	966	3169	
9,7	150	Lapua	Scenar-L	83,5	3.287	N160	3,27	50.5	794	2605	3,87	59.7	893	2930
				N165		3,72	57.4	820	2690	4,28	66.1	925	3035	
				N560		3,86	59.6	847	2779	4,32	66.7	951	3120	
9,7	150	Nosler	Partition	83,5	3.287	N160	3,53	54.5	824	2703	3,94	60.8	912	2992
				N165		3,82	59.0	847	2779	4,32	66.7	931	3054	
				N560		3,89	60.0	851	2792	4,35	67.1	948	3110	
10,1	155	Lapua	Naturalis N564	83,0	3.268	N160	2,99	46.1	716	2349	3,42	52.8	806	2644
				N165		3,30	50.9	743	2438	3,93	60.6	852	2795	
				N560		3,50	54.0	773	2536	3,90	60.2	879	2884	
10,4	160	Lapua	Naturalis	81,8	3.220	N160	3,15	48.6	753	2470	3,76	58.0	859	2818
				N165		3,65	56.3	786	2579	4,08	63.0	868	2848	
				N560		3,67	56.6	843	2766	4,03	62.2	943	3094	
10,4	160	Speer	Grand Slam	82,0	3.228	N160	3,31	51.1	784	2572	3,99	61.6	880	2887
				N165		3,83	59.1	812	2664	4,41	68.1	909	2982	
				N560		3,91	60.3	823	2700	4,45	68.7	925	3035	
10,9	168	Sierra	HPBT	83,5	3.287	N160	3,26	50.3	767	2516	3,86	59.6	862	2828
				N165		3,61	55.7	788	2585	4,14	63.9	853	2799	
				N560		3,75	57.9	811	2661	4,26	65.7	903	2963	
11,3	175	Sierra	SBT	83,5	3.287	N160	3,09	47.7	737	2418	3,64	56.2	826	2710
				N165		3,41	52.6	746	2448	4,06	62.7	854	2802	
				N560		3,66	56.5	791	2595	4,18	64.5	885	2904	

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

7 mm Remington Magnum

cont.

Bullet	Powder	Starting load				Maximum load								
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity				
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
11,7	180	Berger	Hybrid Target	83,5	3.287	N160	3,12	48.1	731	2398	3,51	54.2	797	2615
						N560	3,43	52.9	764	2507	3,87	59.7	843	2766
						N565	3,60	55.6	787	2582	4,06	62.7	853	2799
11,7	180	Lapua	Scenar-L	83,5	3.287	N160	2,78	42.9	678	2224	3,24	50.0	765	2510
						N165	2,87	44.3	679	2228	3,48	53.7	783	2569
						N560	3,10	47.8	728	2388	3,45	53.2</td		

.30 Carbine

Test barrel:	460 mm (18"), 1 in 10" twist						
Primers:	Small Rifle						
Cases:	Federal, trim-to length 32,60 mm (1.283")						

Bullet				Powder	Starting load		Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	
6,5	100	Speer	Plinker	42,5 1.673	N110	0,88	13.6	610	2001	
7,1	110	Speer	Spire Point	42,5 1.673	N110	0,79	12.1	545	1786	
						0,91	14.0	605	1983	

.300 AAC Blackout

Test barrel:	356 mm (14"), 1 in 8" twist						
Primers:	Small Rifle						
Cases:	Lapua 221 Rem. Fireball, trim-to length 34,60 mm (1.362")						

Bullet				Powder	Starting load		Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	
6,5	100	Lapua	HPCE / OTCE	46,5 1.831	N105	0,67	10.3	569	1867	
					N110	0,93	14.4	633	2077	
8,0	123	Lapua	FMJ	50,2 1.976	N105	0,67	10.3	480	1575	
					N110	0,94	14.5	566	1857	
8,1	125	Nosler	Accubond	51,4 2.024	N105	0,66	10.2	518	1699	
					N110	0,89	13.7	580	1903	
8,1	125	Sierra	MatchKing	56,1 2.209	N105	0,66	10.2	531	1742	
					N110	0,92	14.2	568	1864	
9,7	150	Lapua	LockBase	57,0 2.244	N120	0,60	9.3	317	1040	
10,0	155	Lapua	Scenar	57,0 2.244	N120	0,62	9.6	316	1037	
10,9	167	Lapua	Scenar	57,0 2.244	N120	0,61	9.4	313	1027	
12,0	185	Lapua	Scenar	57,0 2.244	N120	0,66	10.2	318	1043	
13,0	200	Lapua	FMJBT	57,0 2.244	N110	0,54	8.3	319	1047	
					N120	0,66	10.2	316	1037	
						1,02	15.7	459	1506	

.308 Winchester

Test barrel:	610 mm (24"), 1 in 12" twist						
Primers:	Large Rifle						
Cases:	Lapua, trim-to length 51,00 mm (2.008")						

Bullet				Powder	Starting load		Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	
3,7	57	Lapua	ALS ¹⁾	67,0 2.638	N110	1,78	27.5	1061	3481	
6,5	100	Lapua	HPCE / OTCE	67,0 2.638	N110	1,32	20.4	711	2333	
					N120	1,98	30.6	812	2663	
					N130	2,18	33.7	852	2794	
					N133	2,63	40.6	918	3012	
					N530	2,68	41.4	915	3002	
					N135	2,47	38.1	865	2837	
7,1	110	Barnes	TSX FB	68,5 2.697	N130	2,46	38.0	880	2887	
					N133	2,70	41.7	910	2986	
					N530	2,82	43.5	913	2995	
					N135	2,80	43.2	914	2999	
7,1	110	Hornady	V-Max	68,5 2.697	N130	2,41	37.2	875	2871	
					N133	2,63	40.6	897	2943	
					N530	2,73	42.1	905	2969	
					N135	2,76	42.6	915	3002	
					N140	2,98	46.0	912	2992	
7,1	110	Sako	HP	67,5 2.657	N120	2,32	35.8	844	2769	
					N130	2,52	38.9	862	2826	
						2,96	45.7	988	3242	

.308 Winchester

cont.

Bullet				Powder	Starting load				Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	
8,0	123	Lapua	FMJ	66,9 2.634	N120	2,08	32.1	812	2664	2,39	36.9	
					N130	2,26	34.9	782	2566	2,78	42.9	
					N133	2,62	40.4	858	2815	2,87	44.3	
					N530	2,59	40.0	850	2789	2,88	44.4	
					N135	2,72	42.0	830	2723	3,06F	47.2F	
8,1	125	Nosler	Ballistic Tip	70,0 2.756	N130	2,40	37.0	818	2684	2,79	43.0	
					N133	2,60	40.1	829	2721	3,00	46.3	
					N135	2,70	41.6	833	2732	3,17	48.9	
					N140	2,86	44.1	835	2739	3,23F	49.8F	
8,1	125	Sierra	TMK	71,0 2.795	N130	2,28	35.2	812	2664	2,55	39.4	
					N133	2,57	39.7	840	2756	2,75	42.4	
					N530	2,51	38.7	833	2733	2,85	44.0	
					N135	2,62	40.4	841	2759	2,81	43.4	
					N140	2,80	43.2	836	2743	3,06	47.2	
8,5	130	Barnes	TSX BT	70,7 2.783	N130	2,29	35.3	797	2615	2,53	39.0	
					N133	2,50	38.6	822	2697	2,70	41.7	
					N530	2,62	40.4	830	2723	2,84	43.8	
					N135	2,60	40.1	829	2720	2,83	43.7	
					N140	2,81	43.4	835	2740	3,05	47.1	
9,1	140	LOS	Hunting Tactic	70,5 2.776	N135	2,55	39.4	812	2664	2,76	42.9	
					N140	2,70	41.7	809	2654	2,96	45.7	
					N540	2,72	42.0	816	2677	2,97	45.8	

.308 Winchester

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
9,7	150	Sierra	HPBT	71,0	2.795	N140	2,62	40.4	752	2467	3,06	47.3	869	2851
						N540	2,71	41.8	758	2487	3,13	48.3	901	2956
						N150	2,74	42.2	776	2545	3,14C	48.4C	874	2869
						N550	2,88	44.5	772	2534	3,26F	50.3F	870	2855
						N133	2,27	35.0	729	2391	2,86	44.1	863	2831
9,7	150	Sierra	SPBT	70,0	2.756	N133	2,27	35.0	729	2391	2,86	44.1	863	2831
						N135	2,56	39.5	764	2505	2,96	45.7	871	2857
						N140	2,71	41.8	767	2516	3,05	47.1	858	2815
						N150	2,82	43.6	776	2545	3,23	49.9	878	2880
						N550	2,75	42.4	763	2503	2,98	46.0	831	2726
9,7	150	Woodleigh	Weldcore PP	71,0	2.795	N135	2,42	37.3	751	2464	2,68	41.4	817	2680
						N140	2,53	39.0	745	2444	2,87	44.3	822	2697
						N540	2,63	40.6	768	2520	2,93	45.2	854	2802
						N140	2,66	41.1	765	2510	2,94	45.4	845	2772
						N540	2,69	41.5	776	2546	2,99	46.1	871	2858
10,0	154	Brenneke	TAG	69,6	2.740	N140	2,74	42.3	772	2533	3,00	46.3	848	2782
						N150	2,74	42.3	772	2533	3,00	46.3	848	2782
						N550	2,64	40.7	768	2520	2,85	44.0	842	2762
						N150	2,61	40.3	761	2497	2,84	43.8	829	2720
						N550	2,76	42.6	759	2490	3,01	46.5	840	2756
10,0	155	Berger	Hybrid Target	71,0	2.795	N135	2,41	37.2	750	2461	2,61	40.3	812	2664
						N140	2,58	39.8	754	2474	2,80	43.2	819	2687
						N540	2,64	40.7	768	2520	2,85	44.0	842	2762
						N150	2,61	40.3	761	2497	2,84	43.8	829	2720
						N550	2,76	42.6	759	2490	3,01	46.5	840	2756
10,0	155	Lapua	Scenar	71,0	2.795	N530	2,24	34.6	727	2385	2,66	41.0	844	2769
						N135	2,23	34.4	687	2254	2,64	40.7	804	2638
						N140	2,38	36.7	686	2251	2,81	43.4	807	2648
						N540	2,63	40.6	781	2562	2,91	44.9	884	2900
						N150	2,53	39.0	719	2359	3,03	46.8	818	2683
10,0	155	LOS	Hunting	69,9	2.752	N140	2,62	40.4	766	2513	2,88	44.4	836	2743
						N540	2,66	41.1	779	2556	2,90	44.8	855	2805
						N150	2,68	41.4	776	2546	2,94	45.4	846	2776
						N540	2,46	37.9	712	2337	2,92	45.1	838	2750
						N150	2,63	40.6	752	2466	3,01	46.5	850	2790
10,0	155	Sierra	TMK	71,0	2.795	N135	2,42	37.3	753	2470	2,60	40.1	809	2654
						N140	2,58	39.8	751	2464	2,79	43.1	816	2677
						N540	2,62	40.4	766	2513	2,83	43.7	839	2753
						N150	2,63	40.6	761	2497	2,85	44.0	826	2710
						N550	2,78	42.9	765	2510	3,01	46.5	841	2759
10,7	165	Barnes	TSX	71,0	2.795	N140	2,45	37.8	702	2303	2,79	43.1	815	2674
						N150	2,52	38.9	715	2346	2,89	44.6	824	2703
						N550	2,71	41.8	726	2382	3,05	47.1	833	2733
						N140	2,49	38.4	729	2392	2,73	42.1	788	2585
						N540	2,53	39.0	736	2415	2,82	43.5	820	2690
10,7	165	Brenneke	TOG	68,5	2.697	N140	2,51	38.7	719	2359	2,81	43.4	794	2605
						N150	2,49	38.4	729	2392	2,73	42.1	788	2585
						N550	2,51	38.7	719	2359	2,81	43.4	794	2605
						N140	2,46	38.0	682	2238	2,67	41.2	756	2480
						N540	2,41	37.2	685	2247	2,70	41.7	777	2549
10,7	165	Hornady	GMX	71,0	2.795	N140	2,46	38.0	682	2238	2,67	41.2	756	2480
						N150	2,42	37.3	681	2234	2,70	41.7	761	2497
						N550	2,61	40.3	699	2293	2,93	45.2	790	2592
						N140	2,60	40.1	759	2490	2,82	43.5	819	2687
						N540	2,60	40.1	759	2490	2,82	43.5	819	2687
10,7	165	Red Moose	TARVAS	69,2	2.724	N140	2,60	40.1	759	2490	2,82	43.5	819	2687

.308 Winchester

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
10,7	165	Rhino	Solid Shank	67,5	2.657	N140	2,56	39.5	736	2415	2,78	42.9	796	2612
						N540	2,60	40.1	739</					

.308 Winchester

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]					
					N140	2,39	36.9	666	2185	2,64	40.7	736	2415	
					N540	2,39	36.9	675	2215	2,64	40.7	748	2454	
					N150	2,36	36.4	670	2198	2,63	40.6	738	2421	
					N550	2,57	39.7	681	2234	2,81	43.4	751	2464	
11,7	180	Barnes	XFB	71,0	2.795	N540	2,09	32.2	591	1938	2,55	39.3	715	2346
					N550	2,30	35.5	623	2043	2,75	42.4	734	2408	
11,7	180	Berger	Elite Hunter	71,0	2.795	N135	2,36	36.4	693	2274	2,53	39.0	746	2448
					N140	2,45	37.8	694	2277	2,66	41.1	758	2487	
					N540	2,53	39.0	713	2339	2,73	42.1	777	2549	
					N150	2,48	38.3	697	2287	2,70	41.7	760	2493	
					N550	2,67	41.2	715	2346	2,90	44.8	785	2575	
11,7	180	Hornady	SP	71,0	2.795	N135	2,33	36.0	661	2169	2,71	41.8	765	2510
					N140	2,47	38.1	669	2196	2,86	44.1	781	2561	
					N150	2,48	38.3	677	2220	3,00	46.3	793	2601	
11,7	180	Lapua	Naturalis	68,1	2.681	N140	2,60	40.1	707	2320	2,84	43.8	772	2533
					N540	2,63	40.6	703	2306	2,90	44.7	769	2523	
					N150	2,75	42.4	727	2385	2,95	45.5	778	2552	
					N550	2,84	43.8	716	2349	3,13	48.3	791	2595	
11,7	180	Norma	Oryx	68,8	2.709	N530	2,24	34.6	693	2274	2,38	36.7	744	2441
					N135	2,22	34.3	680	2231	2,40	37.0	737	2418	
					N140	2,42	37.3	697	2287	2,66	41.1	760	2493	
					N540	2,45	37.8	708	2323	2,66	41.1	770	2526	
					N150	2,43	37.5	702	2303	2,68	41.4	764	2507	
					N550	2,59	40.0	712	2336	2,81	43.4	774	2539	
11,7	180	RWS	HMK	67,6	2.661	N140	2,47	38.1	693	2274	2,68	41.4	754	2474
					N540	2,49	38.4	701	2300	2,75	42.4	772	2533	
					N150	2,48	38.3	697	2287	2,73	42.1	760	2493	
					N550	2,74	42.3	712	2336	3,04C	46.9C	788	2585	
11,7	180	RWS	UNI Classic	67,2	2.646	N140	2,43	37.5	689	2260	2,69	41.5	753	2470
					N540	2,45	37.8	690	2264	2,70	41.7	761	2497	
					N150	2,50	38.6	698	2290	2,73	42.1	758	2487	
					N550	2,70	41.7	704	2310	2,98C	46.0C	778	2552	
12,0	185	Berger	Hybrid Target	71,0	2.795	N540	2,42	37.3	684	2244	2,62	40.4	757	2484
					N150	2,41	37.2	672	2205	2,63	40.6	738	2421	
12,0	185	Berger	Juggernaut Target	71,0	2.795	N140	2,40	37.0	668	2192	2,61	40.3	730	2395
					N540	2,45	37.8	687	2254	2,66	41.1	758	2487	
					N150	2,43	37.5	674	2211	2,63	40.6	734	2408	
					N550	2,63	40.6	699	2293	2,81	43.4	764	2507	
12,0	185	Lapua	D46	71,0	2.795	N135	2,33	36.0	667	2188	2,66	41.0	761	2495
					N140	2,44	37.6	675	2215	2,83A	43.7A	778	2551	
					N540	2,54	39.2	712	2335	2,84	43.8	791	2595	
					N150	2,57	39.7	728	2388	2,84	43.8	805	2641	
					N550	2,73	42.1	731	2398	3,03F	46.8F	822	2697	
12,0	185	Lapua	Mega	67,5	2.657	N135	2,39	36.9	673	2208	2,57	39.7	731	2398
					N140	2,53	39.0	675	2215	2,82	43.5	756	2480	
					N540	2,63	40.6	707	2320	2,92	45.1	801	2628	
					N150	2,65	40.9	688	2257	2,93	45.2	756	2480	
					N550	2,76	42.6	685	2247	3,07	47.4	768	2520	
12,0	185	Lapua	Scenar	71,0	2.795	N140	2,44	37.7	706	2316	2,69	41.5	778	2552
					N540	2,38	36.7	725	2379	2,76	42.6	801	2628	
					N150	2,42	37.3	664	2179	2,72	42.0	785	2575	
					N550	2,62	40.5	672	2203	3,04A	46.9A	795	2608	
12,3	190	Sierra	HPBT	71,0	2.795	N140	2,42	37.3	677	2222	2,78	42.9	764	2508
					N540	2,44	37.6	672	2204	2,83	43.7	786	2579	

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.308 Winchester

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]					
					N150	2,49	38.4	676	2218	2,82	43.6	767	2516	
					N550	2,63	40.6	695	2279	3,06	47.2	800	2624	
13,0	200	Speer	SP	71,0	2.795	N140	2,28	35.2	609	1999	2,67	41.2	712	2335
					N150	2,24	34.5	604	1982	2,74	42.2	715	2344	
13,3	205	Berger	Elite Hunter	71,0	2.795	N140	2,33	36.0	648	2126	2,55C	39.4C	706	2316
					N540	2,45	37.8	669	2195	2,69	41.5	736	2415	
					N150	2,39	36.9	651	2136	2,62C	40.4C	708	2323	
					N550	2,62	40.4	678	2224	2,88C	44.4C	749	2457	
13,5	208	Hornady	A-MAX	71,0	2.795	N140	2,28	35.2	634	2080	2,49C	38.4C	691	2267
					N540	2,45	37.8	668	2192	2,67C	41.2C	730	2395	
					N150	2,40	37.0	647	2123	2,60C	40.1C	699	2293	
					N550	2,60	40.1	673	2208	2,84C	43.8C	737	2418	
14,3	220	Sako	Hammerhead	70,5	2.776	N140	2,30	35.5	609	1998	2,54	39.2	668	2192
					N540	2,27	35.0	603	1978	2,49	38.4	665	2182	
					N150	2,26	34.9	593	1946	2,52	38.9	656	2152	
					N550	2,60	40.1	636	2087	2,79	43.1	692	2270	

.300 Savage

cont.

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
					N133	2,53	39.1	822	2698	2,71	41.8
9,7	150	Lapua	Mega	61,5	2.421	N130	1,89	29.2	684	2243	2,18
					N135	2,24	34.6	706	2315	2,50	38.6
					N140	2,44	37.6	719	2360	2,72	42.0
10,7	165	Sierra	SBT	66,0	2.598	N133	2,20	33.9	690	2264	2,42
					N135	2,35	36.2	700	2297	2,53	39.0
					N140	2,46	37.9	713	2341	2,68	41.4
12,0	185	Lapua	Mega	66,0	2.598	N135	2,15	33.2	631	2072	2,44
					N140	2,30	35.5	649	2131	2,59	40.0
					N540	2,36	36.4	644	2113	2,66	41.0
										720	2362

7,62 x 53R (7,62 Russian)

Test barrel:	660 mm (26"), 1 in 10" twist
Primers:	Large Rifle
Cases:	Lapua, trim-to length 53,30 mm (2.098")

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
6,5	100	Lapua	HPCE / OTCE	68,0	2.677	N120	2,59	40.0	933	3061	2,88
					N130	2,80	43.2	956	3136	3,03	46.8
					N133	2,98	46.0	960	3150	3,20F	49.4F
8,0	123	Lapua	FMJ	68,5	2.697	N130	2,81	43.3	883	2896	3,19
					N133	3,07	47.4	900	2954	3,41	52.6
					N135	3,19	49.2	901	2956	3,50	54.0
9,7	150	Lapua	LockBase	73,0	2.874	N133	2,71	41.8	811	2661	2,92
					N135	2,90	44.8	825	2707	3,12	48.1
					N140	3,09	47.7	847	2779	3,35	51.7
9,7	150	Lapua	Mega	70,9	2.791	N133	2,43	37.5	727	2384	2,83
					N135	2,70	41.7	761	2497	3,05	47.1
					N140	2,86	44.1	774	2540	3,19	49.2
10,0	155	Lapua	Scenar	75,5	2.972	N135	2,74	42.3	786	2579	3,02
					N140	2,90	44.8	800	2625	3,19	49.3
					N150	2,99	46.2	803	2635	3,15A	48.6A
10,1	156	Sako	SPBT	70,5	2.776	N135	2,89	44.6	789	2589	3,18
					N140	3,01	46.5	796	2612	3,19	49.2
					N150	3,16	48.7	809	2655	3,33	51.4
10,9	167	Lapua	Scenar	75,0	2.953	N140	3,00	46.3	784	2573	3,10A
					N540	2,94	45.3	774	2541	3,12	48.1
					N150	3,12	48.1	790	2590	3,27	50.5
10,9	168	Sierra	HPBT	75,6	2.976	N140	2,94	45.4	775	2541	3,18
					N540	3,03	46.7	787	2581	3,12	48.1
					N150	3,08	47.5	790	2591	3,27	50.5
11,0	170	Lapua	LockBase	73,0	2.874	N140	2,82	43.5	773	2536	3,04
					N540	2,92	45.1	783	2569	3,18	49.1
					N150	3,01	46.5	785	2575	3,24	50.0
					N550	3,18	49.1	787	2582	3,46	53.4
11,0	170	Lapua	Naturalis	72,0	2.835	N140	2,78	42.9	755	2477	3,04
					N540	2,95	45.5	774	2539	3,21	49.5
					N150	2,89	44.6	767	2516	3,14	48.5
11,0	170	Lapua	Naturalis N558	72,0	2.835	N140	2,80	43.2	744	2441	3,05
					N540	2,87	44.3	765	2510	3,15	48.6
					N150	2,83	43.7	750	2461	3,09	47.7

7,62 x 53R (7,62 Russian)

cont.

Bullet				Powder	Starting load			Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]
11,7	180	Lapua	Naturalis	72,5	2.854	N140	2,80	43.2	708	2323	3,07
					N540	2,85	44.0	714	2343	3,10	47.8
					N150	2,81	43.4	708	2323	3,10	47.8
					N550	3,10	47.8	721	2365	3,40	52.5
12,0	185	Lapua	D46	76,8	3.024	N140	2,87	44.3	737	2418	3,10
					N540	2,98	46.0	748	2454	3,23	49.8
					N150	2,93	45.2	740	2428	3,16	48.8
					N560	3,14	48.5	754	2474	3,38	52.2
12,0	185	Lapua	Mega	70,0	2.756	N140	2,80	43.2	708	2324	3,12
					N540	2,87	44.4	720	2363	3,17	48.9
					N150	2,92	45.1	718	2355	3,20	49.4
					N550	3,13	48.3	746	2446	3,47	53.5
12,0	185	Lapua	Scenar	75,0	2.953	N135	2,74	42.2	727	2384	2,98
					N140	2,87	44.3	741	2429	3,03A	46.8A
					N540	2,84	43.9	741	2431	3,14	48.5
					N150	2,98	45.9	742	2434	3,24	50.0
					N550	3,03	46.7	747	2452	3,41	52.6
13,0	200	Lapua	D166	76,0	2.992	N140	2,36	36.4	635	2083	2,59A
					N540	2,47	38.1	656	2152	2,69	41.5
					N150	2,36	36.4	641	2103	2,64	40.7
13,0	200	Sierra	HPBT	77,1	3.035	N140	2,72	42.0	698	2292	3,07
					N540	2,75	42.4	703	2306	3,06	47.2
					N150	2,83	43.6	706	2316	3,14	48.5
					N550	3,04	46.8	728	2389	3,34	51.5
14,3	220	Sierra	HPBT	77,1	3.035	N540	2,63	40.6	656	2151	2,87
					N150	2,61	40.3	639	2095	2,96	45.7
					N550	2,84	43.9	675	2215	3,12	48.1

A = Accuracy load F = Full load

<b

.30-06 Springfield

Test barrel:	620 mm (24½"), 1 in 10" twist
Primers:	Large Rifle
Cases:	Lapua, trim-to length 63,10 mm (2.484")

Bullet				Powder		Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.		Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm]	[in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
3,7	57	Lapua	ALS ¹⁾	79,0	3.110	N110	2,02	31.1	1075	3527	2,49	38.4	1217	3994
6,5	100	Lapua	HP / OTCE	79,8	3.142	N130	2,58	39.8	869	2851	3,15	48.6	998	3274
						N133	3,07	47.4	911	2989	3,49	53.9	1016	3333
						N135	3,25	50.1	927	3041	3,66	56.5	1033	3389
						N140	3,50	54.0	926	3038	3,96	61.1	1044	3425
						N540	3,59	55.4	939	3081	4,08	63.0	1058	3471
7,1	110	Hornady	RN	74,0	2.913	N133	3,15	48.6	873	2864	3,48	53.7	983	3225
						N135	3,14	48.5	864	2835	3,47	53.5	964	3163
						N140	3,38	52.2	881	2890	3,74	57.7	977	3205
						N150	3,57	55.1	905	2969	3,94	60.8	1002	3287
8,0	123	Lapua	FMJ	79,8	3.142	N130	2,61	40.3	838	2749	3,01	46.4	934	3064
						N133	2,95	45.5	825	2707	3,31	51.1	922	3025
						N135	3,19	49.2	852	2795	3,48	53.7	937	3074
						N140	3,35	51.7	853	2799	3,73	57.6	952	3123
						N540	3,49	53.9	863	2831	3,83	59.1	958	3143
						N150	3,59	55.4	880	2887	3,91	60.3	976	3202
8,1	125	Nosler	Ballistic Tip	84,0	3.307	N135	3,10	47.8	865	2838	3,40	52.5	935	3068
						N140	3,31	51.1	878	2881	3,64	56.2	958	3143
						N540	3,49	53.9	880	2887	3,91	60.3	994	3261
						N150	3,34	51.5	882	2894	3,81	58.8	966	3169
						N550	3,70	57.1	895	2936	3,91	60.3	950	3117
8,5	130	Barnes	TSX BT	83,3	3.280	N530	3,03	46.8	860	2822	3,34	51.5	935	3068
						N140	3,20	49.4	864	2835	3,47	53.6	936	3071
						N540	3,33	51.4	883	2897	3,62	55.9	960	3150
						N150	3,25	50.2	868	2848	3,55	54.8	938	3077
						N550	3,54	54.6	882	2894	3,89	60.0	967	3173
9,7	150	Barnes	TTSX BT	84,8	3.339	N150	2,94	45.4	780	2559	3,21	49.5	851	2792
						N550	3,20	49.4	799	2621	3,52	54.3	880	2887
						N555	3,60	55.6	836	2743	3,96F	61.1F	909	2982
						N160	3,68	56.8	819	2687	4,00F	61.7F	892	2927
9,7	150	Hornady	SST	82,6	3.252	N530	2,82	43.5	808	2651	3,10	47.8	874	2867
						N140	3,05	47.1	824	2703	3,27	50.5	882	2894
						N540	3,15	48.6	839	2753	3,39	52.3	906	2972
						N150	3,08	47.5	828	2717	3,33	51.4	891	2923
						N550	3,36	51.9	838	2749	3,58	55.2	903	2963
						N160	3,66	56.5	854	2802	3,92	60.5	918	3012
9,7	150	Lapua	LockBase	84,0	3.307	N135	2,93	45.2	789	2589	3,23	49.8	851	2792
						N140	3,13	48.3	802	2631	3,45	53.2	872	2861
						N540	3,16	48.8	792	2598	3,54	54.6	882	2894
						N150	3,25	50.1	803	2635	3,58	55.2	877	2877
						N550	3,51	54.2	819	2687	3,87	59.7	917	3009
9,7	150	Lapua	Mega	76,9	3.028	N135	2,60	40.1	711	2333	3,09	47.7	835	2740
						N140	2,83	43.7	732	2402	3,32	51.2	857	2812
						N540	2,94	45.4	742	2434	3,47	53.5	893	2930
						N150	2,86	44.1	777	2549	3,22	49.7	858	2815
						N550	3,12	48.1	801	2628	3,48	53.7	886	2907
9,7	150	LOS	HT	83,0	3.268	N540	3,21	49.5	864	2835	3,50	54.0	940	3084
						N150	3,21	49.5	853	2799	3,49	53.9	922	3025
						N550	3,40	52.5	866	2841	3,80	58.6	952	3123
9,7	150	Norma	FMJ	82,0	3.228	N540	3,10	47.8	826	2710	3,42	52.8	904	2966

.30-06 Springfield

cont

Bullet					Powder		Starting load				Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]					[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
					N150	3,10	47.8	822	2697	3,36	51.9	884	2900	
					N550	3,35	51.7	834	2736	3,59	55.4	904	2966	
					N555	3,70	57.1	863	2831	3,95F	61.0F	918	3012	
					N160	3,65	56.3	810	2657	3,90F	60.2F	870	2854	
9,7	150	Red Moose	TARVAS	82,9	3.264	N140	3,27	50.5	838	2749	3,48	53.7	897	2943
						N540	3,40	52.5	855	2805	3,62	55.9	925	3035
						N150	3,30	50.9	832	2730	3,54	54.6	896	2940
						N550	3,60	55.6	867	2844	3,83	59.1	930	3051
9,7	150	Sierra	HPBT	84,0	3.307	N140	3,08	47.5	798	2618	3,42	52.8	871	2858
						N540	3,27	50.5	809	2654	3,64	56.2	906	2972
						N150	3,29	50.8	807	2648	3,65	56.3	895	2936
						N550	3,54	54.6	833	2733	3,87	59.7	916	3005
10,0	155	Brenneke	TAG	81,8	3.220	N150	2,89	44.6	760	2493	3,25	50.2	842	2762
						N550	3,28	50.6	796	2612	3,52	54.3	868	2848
						N160	3,43	52.9	784	2572	3,75C	57.9C	844	2769
10,0	155	Lapua	Scenar	84,0	3.307	N140	2,78	42.9	755	2477	3,23	49.8	850	2789
						N540	3,05	47.1	774	2539	3,45	53.3	886	2907
						N150	2,79	43.0	767	2516	3,30	50.9	863	2831
						N550	3,19	49.2	811	2661	3,48	53.7	899	2949
						N160	3,45	53.2	817	2680	3,77	58.2	902	2959
10,0	155	Sierra	HPBT Palma	84,8	3.339	N140	3,10	47.8	821	2694	3,34	51.5	876	2874
						N540	3,16	48.8	829	2720	3,41	52.6	898	2946
						N150	3,12	48.1	821	2694	3,33	51.4	879	2884
						N550	3,45	53.2	843	2766	3,64	56.2	902	2959
						N160	3,67	56.6	845	2772	3,90F	60.2F	896	2940
10,1	156	Sako	SPBT	80,5	3.169	N135	2,97	45.8	776	2546	3,29	50.8	851	2792
						N140	3,10	47.8	775	2543	3,42	52.8	859	2818
						N150	3,18	49.1	781	2562	3,53	54.5	863	2831
10,7	165	Brenneke	TOG	81,0	3.189	N150	2,50	38.6	682	2238	2,90	44.8	764	2507
						N550	2,96	45.7	738	2421	3,33	51.4	816	2677
						N160	2,90	44.8	708	2323	3,53	54.5	810	2657
10,7	165	Hornady	GMX	83,5	3.287	N550	2,93	45.2	747	2451	3,13	48.3	812	2664
						N555	3,19	49.2	769	2523	3,49	53.9	831	2726
						N160	3,04	46.9	740	2428	3,46	53.4	824	2703
						N560	3,36	51.9	742	2434	3,61	55.7	816	2677
10,7	165	Red Moose	TARVAS	82,8	3.260	N540	3,27	50.5	811	2661	3,48	53.7	877	2877
						N150	3,13	48.3	782	2566	3,36	51.9	841	2759
						N550	3,42	52.8	814	2671	3,65	56.3	876	2874
						N555	3,77	58.2	837	2746	4,05C	62.5C	883	2897
						N160	3,81	58.8	819	2687	4,10C	63.3C	882	2894
10,7	165	Swift	Scirocco II	84,0	3.307	N540	2,98	46.0	768	2520	3,23	49.8	835	2740
						N150	2,80	43.2	751	2464	3,12	48.1	813	2667
						N550	3,21	49.5	782	2566	3,46	53.4	848	2782
						N555	3,34	51.5	788	2585	3,73	57.6	862	2828
						N160	3,41	52.6	788	2585	3,67	56.6	849	2785
						N560	3,62	55.9	778	2552	3,95	61.0	852	2795
10,9	167	Lapua	Scenar	84,0	3.307	N135	2,75	42.4	746	2449	3,02	46.6	808	2651
						N140	2,95	45.5	737	2418	3,25A	50.1A	812	2664
						N540	2,94	45.4	737	2418	3,37	52.0	836	2743
						N150	3,06	47.2	748	2454	3,38	52.2	821	2694
						N550	3,22	49.7	779	2556	3,57	55.1	855	2805
						N160	3,60	55.5	749	2457	4,00	61.7	842	2762
10,9	168	Barnes	TSX	81,7	3.217	N540	2,73	42.1	735	2411	3,09	47.7	824	2703
						N550	2,96	45.7	735	2411	3,26	50.3	825	2707

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.30-06 Springfield

cont.

Bullet				Powder	Starting load		Maximum load						
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
				N160	3,25	50.2	745	2444	3,65	56.3	833	2733	
10,9	168	Sierra	TMK	N140	2,89	44.6	762	2500	3,16	48.8	832	2730	
				N540	2,98	46.0	790	2592	3,24	50.0	864	2835	
				N150	2,95	45.5	774	2539	3,22	49.7	845	2772	
				N550	3,17	48.9	800	2625	3,46	53.4	876	2874	
11,0	170	Lapua	LockBase	N140	2,91	44.9	717	2352	3,24	50.0	799	2621	
				N540	2,96	45.7	729	2392	3,34	51.5	821	2694	
				N150	3,06	47.2	735	2411	3,41	52.6	815	2674	
				N550	3,17	48.9	746	2448	3,61	55.7	842	2762	
11,0	170	Lapua	Naturalis LR	N150	2,54	39.2	753	2470	3,12	48.1	822	2697	
				N550	3,16	48.8	761	2497	3,42	52.8	845	2772	
				N160	3,39	52.3	756	2480	3,74	57.7	846	2776	
				N540	2,85	44.0	739	2425	3,15	48.6	821	2694	
11,0	170	Lapua	Naturalis N558	N150	2,62	40.4	694	2277	2,99	46.1	771	2530	
				N550	3,01	46.5	759	2490	3,33	51.4	843	2766	
				N555	3,43	52.9	786	2579	3,68	56.8	846	2776	
				N160	3,38	52.2	777	2549	3,73	57.6	857	2812	
11,3	175	Lapua	Scenar-L	N560	3,47	53.6	756	2480	3,91	60.3	846	2776	
				N140	3,03	46.8	760	2493	3,26	50.3	829	2720	
				N150	3,00	46.3	751	2464	3,21	49.5	807	2648	
				N550	3,30	50.9	777	2549	3,45	53.2	833	2733	
11,6	178	Hornady	ELD-X	N555	3,45	53.2	787	2582	3,71	57.3	843	2766	
				N160	3,60	55.6	777	2549	3,82	59.0	835	2740	
				N560	3,67	56.6	767	2516	3,95C	61.0C	836	2743	
				N150	3,01	46.5	764	2507	3,28	50.6	837	2746	
11,7	180	Barnes	TSX	N550	3,19	49.2	766	2513	3,44	53.1	839	2753	
				N555	3,41	52.6	774	2539	3,69	56.9	833	2733	
				N160	3,51	54.2	765	2510	3,88	59.9	843	2766	
				N560	3,67	56.6	767	2516	3,95C	61.0C	836	2743	
11,7	180	Berger	Elite Hunter	N140	2,72	42.0	713	2339	2,99	46.1	783	2569	
				N550	2,89	44.6	710	2329	3,20	49.4	788	2585	
				N160	3,14	48.5	712	2336	3,54	54.6	792	2598	
				N550	3,28	50.6	785	2575	3,52	54.3	859	2818	
11,7	180	Hornady	GMX	N555	3,48	53.7	783	2569	3,75C	57.9C	845	2772	
				N160	3,54	54.6	788	2585	3,91	60.3	862	2828	
				N560	3,71	57.3	785	2575	4,08	63.0	866	2841	
				N140	2,68	41.4	687	2254	2,88	44.4	737	2418	
11,7	180	Lapua	Naturalis	N540	2,71	41.8	697	2287	2,94	45.4	751	2464	
				N150	2,58	39.8	666	2185	2,91	44.9	742	2434	
				N550	2,83	43.7	695	2280	3,13	48.3	773	2536	
				N555	3,15	48.6	728	2388	3,56	54.9	800	2625	
11,7	180	Lapua	Naturalis	N160	2,97	45.8	695	2280	3,41	52.6	779	2556	
				N560	3,47	53.6	716	2349	3,96	61.1	807	2648	
				N140	2,77	42.7	693	2274	3,13	48.3	784	2572	
				N550	2,75	42.4	717	2352	3,13	48.3	789	2589	
11,7	180	Norma	Oryx	N150	3,20	49.4	753	2470	3,50	54.0	830	2723	
				N160	3,40	52.5	765	2510	3,62	55.9	819	2687	
				N560	3,45	53.2	733	2405	3,87	59.7	829	2720	
				N160	3,21	49.5	748	2454	3,61	55.7	819	2687	

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.30-06 Springfield

cont.

Bullet				Powder	Starting load		Maximum load					
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]			
11,7	180	Sierra	SBT	N560	3,44	53.1	748	2454	3,74	57.7	816	2677
				N150	2,86	44.1	733	2405	3,19	49.2	813	2667
				N550	3,12	48.1	763	2503	3,38	52.2	826	2710
				N555	3,50	54.0	788	2585	3,85C	59.4C	856	2808
12,0	185	Berger	Classic Hunter	N160	3,54	54.6	769	2523	3,82	59.0	832	2730
				N540	3,10	47.8	776	2546	3,36	51.9	842	2762
				N150	3,01	46.5	750	2461	3,31	51.1	820	2690
				N550	3,30	50.9	775	2543	3,53	54.5	846	2776
12,0	185	Berger	Hybrid Target	N160	3,57	55.1	772	2533	3,89	60.0	848	2782
				N550	3,19	49.2	773	2536	3,41	52.6	840	2756
				N160	3,49	53.9	767	2516	3,85	59.4	842	2762

.30-06 Springfield

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]			
					N160	3,27	50.5	711	2333	3,56	54.9	774	2539	
					N560	3,56	54.9	732	2402	3,83	59.1	798	2618	
					N565	3,57	55.1	729	2392	3,89	60.0	782	2566	
14,0	215	Berger	Hybrid Target	84,8	3.339	N550	3,04	46.9	704	2310	3,28	50.6	768	2520
					N555	3,25	50.2	705	2313	3,53	54.5	761	2497	
					N165	3,76	58.0	727	2385	3,95	61.0	774	2539	
					N560	3,55	54.8	719	2359	3,94	60.8	800	2625	
14,3	220	Berger	Long Range Hybrid Target	84,8	3.339	N150	2,68	41.4	652	2139	2,89	44.6	702	2303
					N550	2,87	44.3	679	2228	3,13	48.3	740	2428	
					N555	3,32	51.2	711	2333	3,58C	55.2C	767	2516	
					N160	3,30	50.9	693	2274	3,53	54.5	750	2461	
14,3	220	Hornady	RN	84,0	3.307	N160	3,29	50.8	654	2146	3,63	56.0	722	2369
					N560	3,47	53.5	672	2205	3,97	61.3	767	2516	
14,3	220	Lapua	Scenar-L	84,8	3.339	N150	2,71	41.8	645	2116	2,96	45.7	701	2300
					N550	3,00	46.3	679	2228	3,18	49.1	735	2411	
					N555	3,15	48.6	686	2251	3,42	52.8	741	2431	
					N160	3,20	49.4	674	2211	3,54	54.6	734	2408	
					N165	3,60	55.6	700	2297	3,89C	60.0C	760	2493	
					N560	3,42	52.8	684	2244	3,71C	57.3C	751	2464	
14,3	220	Rhino	Solid Shank	81,6	3.213	N150	2,66	41.1	632	2073	2,93	45.2	686	2251
					N550	2,98	46.0	665	2182	3,15	48.6	713	2339	
					N160	3,20	49.4	672	2205	3,45	53.2	725	2379	
					N560	3,48	53.7	680	2231	3,88C	59.9C	752	2467	
					N565	3,75	57.9	697	2287	3,99C	61.6C	750	2461	
15,6	240	Woolleigh	Weldcore	84,0	3.307	N165	3,45	53.2	658	2159	3,90	60.2	729	2392
					N560	3,31	51.1	647	2123	3,67	56.6	726	2382	
					N565	3,48	53.7	667	2188	3,87	59.7	732	2402	

A = Accuracy load C = Compressed load F = Full load ¹⁾A muzzle velocity exceeding 1000 m/s (3300 fps) may lead to severe barrel fouling!

.300 H&H Magnum

Test barrel:	610 mm (24"), 1 in 10" twist
Primers:	Large Rifle Magnum
Cases:	Winchester, trim-to length 72,20 mm (2.842")

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]			
10,0	155	Lapua	Scenar	91,4	3.598	N150	3,76	58.0	888	2913	3,97	61.3	935	3068
					N550	3,98	61.4	914	2999	4,26	65.8	971	3187	
					N160	4,28	66.0	909	2982	4,57	70.5	967	3174	
12,0	185	Lapua	Scenar	91,4	3.598	N160	3,95	60.9	820	2690	4,21	64.9	872	2862
					N165	4,35	67.1	843	2766	4,62	71.4	895	2937	
					N560	4,31	66.5	851	2792	4,59	70.9	908	2978	
13,0	200	Sierra	HPBT	91,4	3.598	N160	3,87	59.7	792	2598	4,04	62.4	829	2719
					N165	4,24	65.4	813	2667	4,45	68.6	853	2799	
					N560	4,21	65.0	821	2694	4,42	68.1	864	2834	

.300 WSM

Test barrel:	620 mm (24½"), 1 in 10" twist
Primers:	Large Rifle Magnum
Cases:	Winchester, trim-to length 53,10 mm (2.091")

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]			
6,5	100	Lapua	HPCE / OTCE	67,0	2.638	N540	3,91	60.3	1042	3419	4,29	66.2	1146	3760

.300 WSM

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]			
					N150	3,85	59.4	1026	3366	4,21	65.0	1107	3632	
					N550	4,14	63.9	1027	3369	4,55	70.2	1079	3540	
8,0	123	Lapua	FMJ	68,8	2.709	N150	3,82	59.0	963	3159	4,10	63.3	1032	3386
					N550	4,06	62.7	950	3117	4,39	67.7	1057	3468	
					N160	4,28	66.1	953	3127	4,70	72.5	1045	3428	
9,7	150	Lapua	LockBase	72,0	2.835	N550	3,74	57.7	882	2894	4,15	64.0	979	3212
					N160	3,89	60.0	878	2881	4,50	69.4	978	3209	
					N560	4,36	67.3	886	2907	4,81	74.2	989	3245	
9,7	150	Lapua	Mega	66,5	2.618	N550	3,51	54.2	860	2822	4,00	61.7	956	3136
					N160	3,75	57.9	849	2785	4,34	67.0	951	3120	
					N560	4,14	63.9	862	2828	4,60	71.0	969	3179	
10,7	165	Swift	Scirocco	73,5	2.894	N550	3,77	58.2	862	2828	4,16	64.2	957	3140
					N160	3,87	59.7	842	2762	4,33	66.8	937	3074	
					N165	4,32	66.7	868	2848					

.300 Norma Magnum

cont.

Bullet				Powder	Starting load			Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]	
					N170	4,65	71.8	773	2536	5,50	84.9	
					N570	5,05	77.9	818	2684	5,66	87.3	
14,3	220	Lapua	Scenar-L	86,5	3.406	N560	4,30	66.4	762	2500	4,98	76.9
					N565	4,41	68.1	769	2523	5,17	79.8	
					N170	4,30	66.4	780	2559	5,30	81.8	
					N570	4,62	71.3	780	2559	5,37	82.9	
14,9	230	Berger	Hybrid Target	86,5	3.406	N560	4,35	67.1	754	2474	4,92	75.9
					N565	4,53	69.9	763	2503	5,11	78.9	
					N570	4,60	71.0	764	2507	5,41	83.5	
											872	
											2861	

.300 Winchester Magnum

Test barrel:	620 mm (24½"), 1 in 10" twist
Primers:	Large Rifle Magnum
Cases:	Lapua, trim-to length 66,30 mm (2.610")

CAUTION: Loads less than the listed starting loads may cause excessive chamber pressure and must not be used!

Bullet				Powder	Starting load			Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]	
7,1	110	Hornady	SP	83,0	3.268	N160	5,40	83.3	1063	3488	5,65	87.1
8,0	123	Lapua	FMJ	81,9	3.224	N150	3,99	61.6	943	3094	4,53	69.9
					N550	4,26	65.7	948	3110	4,72	72.8	
					N160	4,47	69.0	939	3081	5,05	77.9	
9,7	150	Lapua	LockBase	84,0	3.307	N160	4,59	70.8	884	2900	5,08	78.4
					N165	5,10	78.7	900	2953	5,45	84.1	
					N560	4,90	75.6	899	2949	5,29	81.6	
9,7	150	Lapua	Mega	79,5	3.130	N160	3,79	58.5	815	2674	4,48	69.1
					N165	4,29	66.2	844	2769	5,25	81.0	
					N560	4,76	73.5	880	2887	5,26	81.2	
9,7	150	Nosler	Ballistic Tip	84,8	3.339	N160	4,79	73.9	913	2994	5,01	77.3
					N165	5,20	80.2	940	3084	5,35C	82.6C	
10,0	154	Lapua	Scenar	84,0	3.307	N160	4,54	70.1	862	2828	4,94	76.2
					N165	5,04	77.8	885	2904	5,25C	81.0C	
					N560	4,81	74.2	879	2884	5,29	81.6	
10,7	165	Hornady	GMX	84,5	3.327	N160	3,74	57.7	812	2664	4,25	65.6
					N165	4,50	69.4	878	2881	5,30	81.8	
					N560	4,45	68.7	869	2851	4,99	77.0	
					N565	4,49	69.3	860	2822	5,27	81.3	
10,7	165	LOS	HT	84,8	3.339	N160	4,47	69.0	886	2907	4,90	75.6
					N165	4,84	74.7	907	2976	5,29	81.6	
					N560	4,77	73.6	911	2989	5,15	79.5	
					N565	4,92	75.9	914	2999	5,42	83.6	
10,9	167	Lapua	Scenar	84,8	3.339	N160	4,70	72.4	880	2887	5,01	77.3
					N165	5,02	77.5	892	2927	5,39C	83.2C	
					N560	4,70	72.5	846	2776	5,06	78.1	
10,9	168	Sierra	TMK	84,5	3.327	N165	4,70	72.5	876	2874	5,16	79.6
					N560	4,54	70.1	877	2877	4,98	76.9	
					N565	4,78	73.8	889	2917	5,21	80.4	
11,0	170	Lapua	LockBase	84,8	3.339	N160	4,43	68.4	849	2785	4,82	74.4
					N165	4,82	74.4	866	2841	5,15	79.5	
					N560	4,80	74.1	851	2792	5,09	78.5	
11,0	170	Lapua	Naturalis	84,8	3.339	N160	3,70	57.1	771	2530	4,13	63.7
					N165	4,00	61.7	789	2589	4,80A	74.1A	
					N560	4,26	65.7	818	2684	4,78	73.8	
											923	
											3028	

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.300 Winchester Magnum

cont.

Bullet				Powder	Starting load			Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]	
11,0	170	Lapua	Naturalis N558	84,0	3.307	N160	4,09	63.1	824	2703	4,63	71.5
					N165	4,32	66.7	831	2726	4,92	75.9	
					N560	4,43	68.4	848	2782	4,95	76.4	
11,3	175	Lapua	Scenar-L	84,0	3.307	N160	4,38	67.6	812	2664	4,79	73.9
					N165	4,72	72.8	831	2726	5,15	79.5	
					N560	4,60	71.0	831	2726	5,06	78.1	
11,7	180	Lapua	Naturalis	85,7 ¹⁾	3.374	N160	4,05	62.5	836	2743	4,53	69.9
					N165	4,45	68.7	839	2753	4,93	76.1	
					N560	4,80	74.1	873	2864	5,01	77.3	
11,7	180	Nosler	Partition	84,8	3.339	N160	4,52	69.8	843	2765	4,94	76.1
					N165	4,86	75.0	852	2795	5,26	81.1	
12,0	185	Lapua	Mega	82,5	3.248	N160	3,40	52.5	720	2362	4,58	70.7
					N165	3,90	60.2	753	2470	5,17	79.8	
					N560	4,51	69.6	802	2631	5,02	77.5	
12,0	185	Lapua	Scenar	84,8	3.339	N160	4,26	65.7	805	2641	4,70	72.5
					N165	4,72	72.8	825	2707	5,10A	78.7A	
					N560	4,60	71.0	816	2677	5,01	77.3	
12,3	190	Sierra	HPBT	84,8	3.339	N165	4,49	69.2	816	2676	5,01	77.3
					N560	4,34	66.9	823	2701	4,88	75.3	
					N170	4,40	67.8	788	2586	5,06	78.0	
13,0	200	Barnes	LRX BT	84,5	3.327	N165	3,42	52.8	710	2329	4,05	62.5
					N560	3,75	57.9	751	2464	4,39	67.7	

.300 Weatherby Magnum

Test barrel:	660 mm (26"), 1 in 10" twist						
Primers:	Large Rifle Magnum						
Cases:	Weatherby, trim-to length 71,50 mm (2.815")						

CAUTION: Loads less than the listed starting loads may cause excessive chamber pressure and must not be used!

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
8,1	125	Nosler	Ballistic Tip	90,0	3.543	N160	5,19	80,2	1046	3430	5,52	85,2	1104	3623
9,7	150	Nosler	Ballistic Tip	90,1	3.547	N160	4,88	75,2	945	3102	5,22	80,6	1003	3291
						N165	5,27	81,3	949	3113	5,59	86,3	1019	3343
10,7	165	Speer	SPBT	90,3	3.555	N160	4,85	74,8	923	3028	5,16	79,6	975	3200
						N165	5,24	80,9	932	3057	5,57	85,9	984	3228
11,7	180	Hornady	SP	90,3	3.555	N160	4,66	71,9	875	2872	5,01	77,3	930	3050
						N165	5,04	77,7	888	2912	5,43	83,8	944	3098
13,0	200	Lapua	Naturalis	88,5	3.484	N165	3,80	58,6	760	2493	4,29	66,2	800	2625
						N560	4,16	64,2	816	2677	4,44	68,5	842	2762
						N170	4,50	69,4	800	2625	4,82	74,4	840	2756
13,0	200	Sierra	HPBT	90,3	3.555	N165	4,39	67,7	795	2609	4,87	75,1	858	2814
						N560	4,47	69,0	821	2694	4,81	74,2	872	2862
						N170	4,44	68,5	781	2562	5,11	78,9	859	2817

.300 Lapua Magnum

Test barrel:	690 mm (27"), 1 in 9½" twist						
Primers:	Large Rifle Magnum						
Cases:	Lapua, trim-to length 68,90 mm (2.713")						

CAUTION: Loads less than the listed starting loads may cause excessive chamber pressure and must not be used!

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
10,0	155	Lapua	Scenar	93,0	3.661	N160	4,89	75,5	973	3192	5,23	80,7	1023	3355
						N560	5,24	80,9	973	3192	5,73	88,4	1057	3468
						N170	6,01	92,7	993	3258	6,41	99,0	1064	3491
11,0	170	Lapua	LockBase	93,0	3.661	N560	5,12	79,0	942	3091	5,49	84,7	1004	3293
						N170	5,66	87,3	939	3081	6,10	94,1	1003	3292
						24N41	6,15	94,9	945	3100	6,56	101,2	1015	3331
12,0	185	Lapua	Scenar	93,0	3.661	N560	4,82	74,4	879	2884	5,31	81,9	954	3131
						N170	5,40	83,3	893	2930	5,89	90,9	962	3158
						24N41	5,93	91,5	916	3005	6,30	97,2	965	3166
13,0	200	Sierra	HPBT	93,0	3.661	N170	5,09	78,5	851	2792	5,56	85,8	915	3003
						24N41	5,56	85,8	866	2841	6,01	92,8	928	3044
14,3	220	Sierra	HPBT	93,0	3.661	24N41	5,10	78,7	804	2638	5,67	87,4	875	2871
						20N29	6,06	93,5	856	2808	6,45	99,6	908	2980

.300 Remington Ultra Magnum

Test barrel:	660 mm (26"), 1 in 10" twist						
Primers:	Large Rifle Magnum						
Cases:	Remington, trim-to length 72,10 mm (2.839")						

CAUTION: Loads less than the listed starting loads may cause excessive chamber pressure and must not be used!

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
10,0	155	Lapua	Scenar	89,5	3.524	N160	5,29	81,6	957	3140	5,80	89,5	1044	3425

.300 Remington Ultra Magnum

cont.

Bullet	Powder	Starting load				Maximum load								
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity						
[g]	[grs]		[mm]	[in.]	[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]		
					N560	5,60	86,4	865	2838	6,09	94,0	1067	3501	
10,7	165	Nosler	Partition	89,5	3.524	N160	4,97	76,7	896	2940	5,64	87,0	980	3214
					N165	5,57	85,9	919	3015	6,12	94,4	1009	3311	
					N560	5,39	83,2	902	2959	6,13	94,5	1027	3371	
10,85	167	Lapua	Scenar	90,0	3.543	N165	5,05	77,9	882	2894	6,10	94,1	1007	3304
					N560	5,29	81,6	925	3035	5,95	91,8	1029	3376	
					N170	5,37	82,9	895	2936	6,48	100,0	1011	3317	
11,0	170	Lapua	LockBase	90,0	3.543	N165	4,56	70,4	851	2792	5,73	88,4	976	3202
					N560	4,73	73,0	899	2949	5,74	88,6	1006	3301	
					N170	5,02	77,5	865	2838	6,36	98,1	992	3255	
11,7	180	Barnes	XFB	89,5	3.524	N165	4,52	69,7	833	2733	5,40	83,3	939	3079
					N560	4,65	71,7	854	2802	5,60	86,3	956	3137	
					N170	4,90	75,6	840	2756	6,12	94,4	952	3124	
12,0	185	Lapua	Mega	88,5	3.484	N165	4,75	73,3	82					

7,62 x 39

Test barrel:	415 mm (16"), 1 in 9½" twist						
Primers:	Large Rifle						
Cases:	Lapua, trim-to length 38,50 mm (1.516")						

Bullet				Powder	Starting load		Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	
3,7	57	Lapua	ALS	55,7	2,193	N110	1,56 24.1	925 3035	1,78 27.5	997 3233
6,5	100	Lapua	HP / OTCE	55,4	2,181	N110	1,22 18.8	685 2247	1,41 21.8	772 2503
						N120	1,65 25.5	688 2257	1,80 27.8	769 2494
7,1	110	H&N	RN HS	50,5	1,988	N110	0,90 13.9	498 1634	1,00 15.4	527 1729
						N120	1,20 18.5	509 1670	1,25 19.3	548 1798
8,0	123	Lapua	FMJ	55,7	2,193	N120	1,60 24.7	663 2175	1,77 27.3	728 2361
8,1	125	Sierra	TMK	58,0	2,283	N110	1,05 16.2	607 1991	1,19 18.4	656 2152
						N120	1,50 23.1	657 2156	1,64 25.3	719 2359
						N130	1,64 25.3	660 2165	1,80 27.8	712 2336
9,7	150	Lapua	LockBase	56,0	2,205	N120	1,43 22.1	605 1985	1,58 24.4	666 2185
9,7	150	X-Treme Bullets	Flat Point	55,0	2,165	N110	0,90 13.9	465 1526	1,00 15.4	535 1755
						N120	1,10 17.0	424 1391	1,30 20.1	535 1755
13,0	200	Lapua	B416 Subsonic	56,0	2,205	N110	0,87 13.4	435 1427	0,97 15.0	481 1578
						N120	1,21 18.7	493 1617	1,33 20.5	542 1778
						N130	1,30 20.1	499 1637	1,45 22.4	553 1814

.303 British

Test barrel:	600 mm (23½"), 1 in 10" twist						
Primers:	Large Rifle						
Cases:	Remington, trim-to length 56,20 mm (2.213")						

Bullet				Powder	Starting load		Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	
3,7	57	Lapua	ALS ¹⁾	73,3	2,886	N110	1,68 25.9	981 3219	2,21 34.1	1178 3865
8,0	123	Lapua	FMJ	73,3	2,886	N120	2,18 33.6	819 2687	2,37 36.6	873 2864
						N130	2,39 36.9	840 2756	2,59 40.0	895 2936
						N133	2,58 39.8	858 2815	2,76 42.6	914 2999
9,7	150	Lapua	Mega	70,5	2,776	N130	2,38 36.7	831 2726	2,55 39.3	884 2900
						N133	2,49 38.4	839 2753	2,70 41.7	899 2949
11,3	174	Sierra	HPBT	78,0	3,071	N135	2,29 35.3	711 2333	2,49 38.4	761 2497
						N140	2,49 38.4	725 2379	2,70 41.7	782 2566
						N540	2,57 39.7	728 2388	2,78 42.9	791 2595
11,7	180	Sierra	Spitzer	78,0	3,071	N135	2,15 33.2	664 2178	2,36 36.4	714 2343
						N140	2,33 36.0	683 2241	2,57 39.7	739 2425
						N540	2,48 38.3	697 2287	2,70 41.7	758 2487

¹⁾ A muzzle velocity exceeding 1000 m/s (3300 fps) may lead to severe barrel fouling!

8 x 57 IS (8 mm Mauser)

Test barrel:	620 mm (24½"), 1 in 9½" twist						
Primers:	Large Rifle						
Cases:	Lapua, trim-to length 56,80 mm (2.236")						

Bullet				Powder	Starting load		Maximum load			
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	
8,1	125	Hornady	SP	74,0	2,913	N130	2,80 43.2	874 2867	3,12 48.1	950 3117
						N133	3,14 48.5	883 2897	3,50 54.0	979 3212
						N135	3,22 49.7	882 2894	3,57 55.1	974 3196
9,7	150	Speer	Spitzer	76,0	2,992	N135	2,97 45.8	801 2628	3,31 51.1	880 2887
						N140	3,13 48.3	799 2621	3,49 53.9	892 2927
10,4	160	Barnes	TTSX	77,0	3,031	N135	2,67 41.2	752 2467	3,02 46.6	834 2736

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

8 x 57 IS (8mm Mauser)

cont.

Bullet				Powder	Starting load		Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity		
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s]	[fps]		
						N140	2,87	44.3	767	2516	
						N540	3,01	46.5	782	2566	
										3,33 51.4	870 2854
11,0	170	Speer	SP	77,0	3,031	N135	2,86	44.1	748	2454	
						N140	2,99	46.1	747	2451	
						N150	3,13	48.3	761	2497	
11,7	180	Lapua	Naturalis N559	81,0	3,189	N135	2,70	41.7	730	2395	
						N140	2,87	44.3	743	2438	
						N540	2,89	44.6	747	2451	
						N150	2,89	44.6	744	2441	
11,7	181	Brenneke	TOG	77,0	3,031	N140	2,84	43.8	705	2313	
						N540	2,93	45.2	746	2448	
						N150	2,93	45.2	723	2372	
11,7	181	Nosler	E-Tip	77,0	3,031	N135	2,58	39.8	712	2336	
						N140	2,77	42.7	719	2359	
						N540	2,78	42.9	718	2356	
						N150	2,90	44.8	735	2411	
12,8	198	Brenneke	TIG	77,0	3,031	N140	2,82	43.5	697	2287	
		</									

8 x 57 IRS

cont.

Bullet				Powder	Starting load		Maximum load					
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]	
				N540	2,77	42.7	733 2405	2,94	45.4	778	2552	
				N150	2,63	40.6	717 2352	2,83	43.7	758	2487	
12,8	198	Brenneke	TIG	77,0	3.031	N140	2,80	43.2	708 2323	2,95	45.5	739 2425
				N540	2,93	45.2	721 2365	3,07	47.4	758	2487	

8 x 68 S

Test barrel:	670 mm (26"), 1 in 11" twist
Primers:	Large Rifle
Cases:	RWS, trim-to length 67,50 mm (2.646")

Bullet				Powder	Starting load		Maximum load					
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]	
9,7	150	Sierra	Pro Hunter Spitzer	86,4	3.402	N150	4,00	61.7	924 3031	4,48	69.1	1021 3350
				N550	4,32	66.7	946 3104	4,75	73.3	1044	3425	
10,4	160	Barnes	TTSX	86,4	3.402	N150	3,55	54.8	850 2789	4,07	62.8	952 3123
				N550	3,79	58.5	876 2874	4,28	66.1	989	3245	
11,3	174	Brenneke	TAG	87,0	3.425	N550	3,85	59.4	851 2792	4,27	65.9	942 3091
				N160	4,02	62.0	837 2746	4,65	71.8	947	3107	
11,7	180	Lapua	Naturalis N559	86,4	3.402	N150	3,52	54.3	819 2687	4,00	61.7	907 2976
				N550	3,83	59.1	847 2779	4,22	65.1	935	3068	
11,7	180	Nosler	E-Tip	87,0	3.425	N150	3,35	51.7	790 2592	3,92	60.5	885 2904
				N550	3,79	58.5	825 2707	4,21	65.0	921	3022	
13,0	200	Barnes	TSX	87,0	3.425	N160	3,60	55.6	735 2411	4,21	65.0	854 2802
				N560	4,15	64.0	783 2569	4,65	71.8	888	2913	
13,0	200	Nosler	Accubond	87,0	3.425	N550	4,43	68.4	796 2612	5,00	77.2	879 2884
				N160	4,13	63.7	810 2657	4,56	70.4	890	2920	
14,2	219	Brenneke	TOG	87,1	3.425	N160	3,58	55.2	708 2323	4,11	63.4	805 2641
				N560	3,95	61.0	736 2415	4,42	68.2	831	2726	
				N565	4,18	64.5	749 2457	4,85	74.8	848	2782	

.338 Winchester Magnum

Test barrel:	620 mm (24½"), 1 in 10" twist
Primers:	Large Rifle Magnum
Cases:	Lapua, trim-to length 63,30 mm (2.492")

Bullet				Powder	Starting load		Maximum load					
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]	
13,0	200	Hornady	SP	85,0 ¹⁾	3.346	N540	3,90	60.2	814 2671	4,34	67.0	888 2913
				N150	3,85	59.4	801 2628	4,34	67.0	873	2864	
				N550	4,15	64.0	822 2697	4,61	71.1	899	2949	
				N160	4,71	72.7	720 2362	5,23F	80.7F	905	2969	
14,6	225	Hornady	SP	84,0	3.307	N160	4,56	70.4	798 2617	4,80	74.1	856 2809
				N560	4,78	73.8	820 2689	5,15	79.4	849	2785	
15,0	231	Lapua	Naturalis LR	84,3	3.319	N550	3,80	58.6	752 2467	4,31	66.5	838 2749
				N160	4,25	65.6	751 2464	4,74	73.1	843	2766	
16,2	250	Lapua	Scenar	84,0	3.307	N550	4,06	62.7	765 2509	4,27	65.8	810 2657

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.338 Winchester Magnum

cont.

Bullet				Powder	Starting load		Maximum load					
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]	
				N160	4,23	65.3	760 2494	4,55	70.1	813	2669	
				N560	4,72	72.9	787 2581	5,03	77.5	843	2765	
16,2	250	Sierra	SBT	84,8	3.339	N160	4,25	65.6	758 2488	4,58	70.7	810 2659
				N165	4,63	71.4	779 2555	5,02	77.4	835	2738	
				N560	4,39	67.7	774 2540	4,78	73.7	831	2728	
16,2	250	Speer	Grand Slam	83,8	3.299	N160	4,49	69.3	753 2470	4,83	74.5	809 2655
				N165	4,81	74.3	766 2511	5,19	80.0	823	2698	
17,8	275	Speer	SP	85,0 ¹⁾	3.346	N165	4,63	71.5	731 2398	5,01	77.3	785 2576
17,8	275	Swift	A-Frame	86,5 ¹⁾	3.406	N160	3,55	54.8	634 2080	4,15	64.0	717 2352
				N165	3,79	58.5	651 2136	4,35	67.1	725	2379	
				N560	3,76	58.0	651 2136	4,30	66.3	731	2398	
19,4	300	Sierra	HPBT	84,8	3.339	N160	4,06	62.7	692 2270	4,43	68.3	745 2445
				N560	4,20	64.7	700 2295	4,66	71.9	756	2479	
19,4	300	Woodleigh	RNSP	83,5	3.287	N160	3,58	55.2	626 2054	4,10	63.3	692 2270
				N165	3,92	60.5	637 2090	4,46	68.8	711	2333	
				N560	3,92	60.5	658 2159	4,55	70.2	731	2398	

F = Full load ¹⁾The cartridge overall length exceeds the CIP maximum.**.338 Lapua Magnum**

Test barrel:	700 mm (27½"), 1 in 10" twist
Primers:	Large Rifle Magnum
Cases:	Lapua, trim-to length 69,00 mm (2.714")

Bullet				Powder	Starting load		Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity		
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]

<

.338 Lapua Magnum

cont.

Bullet				Powder	Starting load			Maximum load						
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]			
18,5	285	Barnes	TSX	93,0	3.661	N560	4,12	63.6	684	2244	4,78	73.8	772	2533
						N170	4,30	66.4	654	2146	5,20	80.2	768	2520
						N570	4,70	72.5	728	2388	5,31	81.9	806	2644
18,5	285	Hornady	HPBT	93,5	3.681	N165	4,81	74.2	733	2405	5,49	84.7	812	2664
						N560	4,93	76.1	759	2490	5,48	84.6	837	2746
						N170	5,25	81.0	741	2431	5,96	92.0	831	2726
19,4	300	Berger	Elite Hunter	93,5	3.681	N560	4,72	72.8	720	2362	5,27	81.3	790	2592
						N565	4,89	75.5	724	2375	5,55	85.6	804	2638
						N570	5,23	80.7	744	2441	5,80	89.5	815	2674
19,4	300	Berger	HPBT	93,5	3.681	N560	4,64	71.6	744	2441	5,34	82.4	831	2726
						N170	4,62	71.3	720	2362	5,68	87.7	823	2700
						N570	4,24	65.4	711	2333	5,55	85.6	833	2733
19,4	300	Lapua	Scenar	93,5	3.681	N165	4,47	69.0	685	2247	5,30	81.8	785	2575
						N560	4,64	71.6	709	2326	5,33	82.3	814	2671
						N170	4,90	75.6	712	2336	5,74	88.6	811	2661
19,4	300	Sierra	HPBT	91,5	3.602	N165	4,47	69.0	685	2247	5,30	81.8	785	2575
						N560	4,70	72.5	722	2370	5,37	82.8	800	2624
						N170	5,15	79.4	719	2360	5,86	90.4	792	2599
19,4	300	Sierra	HPBT	91,5	3.602	N170	5,39	83.2	776	2546	5,92	91.3	826	2710
						24N41	5,52	85.2	735	2410	6,28	96.8	809	2653

9,3 x 62

Test barrel: 580 mm (22¾"), 1 in 14" twist

Primers: Large Rifle

Cases: Lapua, trim-to length 61,80 mm (2.433")

9,3 x 62

cont.

Bullet				Powder	Starting load			Maximum load						
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]			
18,5	285	Lapua	Mega	82,2	3.236	N135	2,85	44.0	605	1985	3,14	48.5	676	2218
						N140	3,00	46.3	614	2014	3,39	52.3	673	2208
						N540	3,05	47.1	607	1991	3,50	54.0	694	2277
18,5	286	Barnes	TSX	82,5	3.248	N540	3,12	48.1	607	1991	3,47	53.6	679	2228
						N150	2,83	43.7	559	1834	3,32	51.2	654	2146
						N550	2,88	44.4	534	1752	3,94	60.8	697	2287
18,5	286	Woodleigh	Weldcore	82,9	3.264	N130	2,40	37.0	556	1824	2,84	43.8	626	2054
						N150	3,20	49.4	619	2031	3,58	55.2	681	2234
						N550	3,50	54.0	638	2093	3,89	60.0	703	2306
19,4	300	Swift	A-Frame	79,9	3.146	N540	2,92	45.1	582	1909	3,29	50.8	653	2142
						N150	2,89	44.6	569	1867	3,25	50.2	622	2041
						N550	3,13	48.3	590	1936	3,50	54.0	658	2159
20,7	320	Woodleigh	RNSP	82,0	3.228	N540	3,45	53.2	630	2067	3,72	57.4	684	2244
						N150	3,50	54.0	627	2057	3,73	57.6	675	2215
						N550	3,70	57.1	636	2087	4,04	62.3	700	2297

9,3 x 66 Sako

Test barrel: 630 mm (24¾"), 1 in 14" twist

Primers: Large Rifle

Cases: Sako, trim-to length 65,80 mm (2.591")

Bullet				Powder	Starting load			Maximum load						
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]	[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]			
14,3	220	Lapua	Naturalis LR	82,0	3.228	N530	3,01	46.4	687	2254	3,48	53.7	792	2598
						N135	2,95	45.5	662	2172	3,67	56.6	782	2566
						N140	3,49	53.9	733	2405	3,88	59.9	807	2648
14,6	225	Brenneke	TAG	82,0	3.228	N530	3,16	48.8	718	2356	3,52	54.3	787	2582
						N540	3,62	55.9	745	2444	4,04	62.3	817	2680
						N150	3,61	55.7	737	2418	3,97	61.3	800	2625
16,2	250	Barnes	TTSX BT	83,6	3.291	N130	2,35	36.3	571	1873	2,79	43.1	653	2142
						N530	2,75	42.4	616	2021	3,14	48.5	702	2303
						N135	2,69	41.5	606	1988	3,13	48.3	693	2274
16,2	250	Lapua	Naturalis	83,4	3.283	N140	3,44	53.1	692	2270	3,77	58.2	762	2500
						N540	3,40	52.5	702	2303	3,84	59.3	775	2543
						N150	3,53	54.5	701	2300	3,81	58.8	758	2487
16,2	250													

9,3 x 74R

cont.

Bullet				Powder	Starting load			Maximum load						
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]			
					N140	3,30	50.9	656	2152	3,75	57.9	716	2349	
					N540	3,48	53.7	655	2149	3,83	59.1	723	2372	
18,5	285	Lapua	Mega	92,2	3.630	N135	2,80	43.2	576	1890	3,43	52.9	665	2182
					N140	3,45	53.2	636	2087	3,78	58.3	694	2277	
					N540	3,24	50.0	618	2028	3,78	58.3	701	2300	
19,0	293	RWS	TUG	95,5 ¹⁾	3.760	N140	3,42	52.7	637	2088	3,72	57.4	695	2281
19,4	300	Swift	A-Frame	92,2	3.630	N135	2,70	41.7	547	1795	2,94	45.4	593	1946
					N140	2,90	44.7	562	1844	3,21	49.5	613	2011	
					N540	3,04	46.9	575	1886	3,40	52.5	636	2087	
20,7	320	Woodleigh	RNSP	94,0	3.701	N135	2,90	44.7	544	1785	3,18	49.1	601	1972
					N140	3,08	47.5	558	1831	3,37	52.0	610	2001	
					N540	3,15	48.6	571	1873	3,48	53.7	630	2067	

¹⁾The cartridge overall length exceeds the CIP maximum.**.375 H&H Magnum**

Test barrel: 620 mm (24½"), 1 in 12" twist

Primers: Large Rifle Magnum

Cases: Remington, trim-to length 72,20 mm (2.842")

Bullet				Powder	Starting load			Maximum load						
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]			
15,2	235	Speer	Spitzer	91,0	3.583	N140	4,55	70,2	816	2677	4,91	75,8	879	2884
					N540	4,11	63,4	729	2392	5,18	79,9	890	2920	
					N150	4,75	73,3	834	2736	5,10	78,7	886	2907	
16,2	250	Sierra	SBT	91,0	3.583	N540	4,44	68,5	797	2615	4,82	74,4	856	2808
					N150	4,52	69,7	799	2621	4,87	75,1	852	2795	
17,5	270	Barnes	XFB	91,0	3.583	N140	3,90	60,2	635	2083	4,55	70,2	787	2582
					N540	4,20	64,8	727	2385	4,76	73,4	813	2667	
					N150	4,25	65,6	723	2372	4,71	72,7	796	2612	
17,5	270	Speer	SP	91,0	3.583	N140	4,00	61,7	718	2356	4,57	70,5	805	2641
					N540	4,32	66,7	767	2516	4,71	72,7	825	2707	
					N150	4,36	67,3	769	2523	4,87	75,1	830	2723	
17,5	270	Woodleigh	RNSP	91,0	3.583	N135	3,85	59,4	707	2320	4,27	65,9	771	2530
					N540	4,45	68,7	766	2513	4,85	74,8	827	2713	
					N150	4,20	64,8	735	2411	4,70	72,5	799	2621	
18,5	285	Speer	Grand Slam	91,0	3.583	N140	3,90	60,2	665	2182	4,41	68,0	784	2572
					N540	4,22	65,1	732	2402	4,60	71,0	790	2592	
					N150	4,21	65,0	733	2405	4,69	72,4	792	2598	
19,4	300	Swift	A-Frame	91,0	3.583	N140	3,75	57,9	657	2156	4,27	65,9	736	2415
					N540	4,02	62,0	692	2270	4,34	67,0	743	2438	
					N150	3,70	57,1	650	2133	4,24	65,4	726	2382	

.416 Rigby

Test barrel: 620 mm (24½"), 1 in 12" twist

Primers: Large Rifle Magnum

Cases: Norma, trim-to length 73,40 mm (2.890")

Bullet				Powder	Starting load			Maximum load						
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]			
22,7	350	Swift	A-Frame	92,0	3.622	N160	5,45	84,1	679	2228	5,95	91,8	736	2415
					N165	5,55	85,6	682	2238	6,25	96,4	747	2451	
					N560	5,73	88,4	685	2247	6,02	92,9	728	2388	
25,9	400	Barnes	XFB	94,5	3.720	N160	4,70	72,5	599	1965	5,40	83,3	660	2165
					N165	5,83	90,0	631	2070	5,97	92,1	662	2172	

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.416 Rigby

cont.

Bullet				Powder	Starting load			Maximum load						
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity			
[g]	[grs]			[mm] [in.]		[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]	[g] [grs]	[m/s] [fps]			
					N560	5,10	78,7	622	2041	5,43	83,8	661	2169	
25,9	400	Swift	A-Frame	92,0	3.622	N160	4,85	74,8	611	2005	5,36	82,7	672	2205
					N165	5,45	84,1	651	2136	5,91	91,2	698	2290	
26,6	410	Woodleigh	RNSP	92,5	3.642	N160	5,00	77,2	616	2021	5,54	85,5	660	2165
					N165	5,86	90,4	655	2149	6,28	96,9	711	2333	
29,2	450	Woodleigh	RNSP	94,5	3.720	N160	5,20	80,2	614	2014	5,67	87,5	663	2175
					N165	5,83	90,0	631	2070	6,17	95,2	682	2238	
					N560	5,70	88,0	633	2077	6,14	94,7	680	2231	

.444 Marlin

Test barrel: 560 mm (22"), 1 in 38" twist

Primers: Large Rifle

Cases: Remington, trim-to length 56,30 mm (2.216")

</div

.458 Winchester Magnum

Test barrel:	635 mm (25"), 1 in 14" twist						
Primers:	Large Rifle Magnum						
Cases:	Winchester, trim-to length 63,30 mm (2.492")						

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]					
22,7	350	Hornady	RN	74,9	2.949	N120	4,13	63.7	712	2336	4,53	69.9	748	2454
						N130	4,46	68.8	730	2395	4,80	74.1	773	2536
						N133	4,72	72.8	730	2395	4,90F	75.6F	756	2480
25,9	400	Barnes	XFB	83,0	3.268	N130	4,00	61.7	631	2070	4,36	67.3	688	2257
						N530	4,50	69.4	645	2116	4,70F	72.5F	674	2211
						N135	4,30	66.3	625	2051	4,42F	68.2F	644	2113
25,9	400	Swift	A-Frame	82,0	3.228	N130	4,30	66.3	674	2211	4,55	70.2	710	2329
						N530	4,90	75.6	691	2267	5,10F	78.7F	722	2369
						N135	4,80	74.1	677	2221	4,90F	75.6F	692	2270
32,4	500	Hornady	RN	84,0	3.307	N130	3,60	55.5	557	1827	4,11	63.4	623	2044
						N133	3,85	59.4	564	1850	4,52	69.7	645	2116
						N530	4,20	64.8	589	1932	4,76	73.4	655	2149

F = Full load

.50 Browning

Test barrel:	1140 mm (45"), 1 in 16½" twist						
Primers:	CCI35						
Cases:	IMI, trim-to length 99,10 mm (3.902")						

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]					
41,9	647	Speer	FMJBT	137,5	5.413	N170	13,03	201.1	801	2629	14,76	227.8	894	2932
						24N41	13,86	213.8	819	2688	14,72	227.2	888	2915
						20N29	15,53	239.7	836	2744	16,61	256.3	922	3024
45,4	700	Barnes	Solid	137,5	5.413	24N41	13,69	211.2	808	2652	15,00	231.5	887	2910
						20N29	15,27	235.6	819	2687	16,61	256.3	908	2978
48,6	750	Barnes	Solid	137,5	5.413	24N41	13,26	204.6	768	2520	14,54	224.4	858	2815
						20N29	14,64	226.0	782	2565	16,23	250.5	871	2857
48,6	750	Hornady	A-MAX	137,5	5.413	N170	12,31	190.0	759	2490	13,99	215.8	842	2763
						24N41	12,97	200.2	764	2508	14,13	218.0	843	2765
						20N29	14,59	225.2	779	2556	15,97	246.4	862	2829
48,6	750	Lapua	Bullex-N	138,0	5.433	24N41	13,83	213.4	798	2618	14,93	230.4	865	2838
						20N29	15,57	240.3	826	2710	16,58	255.9	895	2936
51,8	800	Barnes	Solid	137,5	5.413	24N41	11,79	181.9	722	2369	12,84	198.1	790	2592
						20N29	14,19	219.1	779	2557	15,88	245.0	850	2788
51,8	800	Lapua	Bullex-N	137,5	5.413	24N41	12,93	199.5	756	2480	14,23	219.6	826	2710
						20N29	14,95	230.7	796	2612	15,79	243.7	857	2812
55,1	850	Barnes	Solid	137,5	5.413	24N41	12,34	190.5	716	2349	13,50	208.3	784	2573
						20N29	13,91	214.7	746	2447	15,42	238.0	828	2716

HANDGUN RELOADING DATA

Disclaimer

All of this reloading information has been provided by Nammo Lapua Oy and Nammo Vihtavuori Oy. The data given here were obtained in laboratory conditions following strictly the CIP (Commission International Permanente) June 13, 1990 and November 9, 1993 rules. The listed maximum loads have been determined according to the respective CIP/SAAMI maximum pressure specification, whichever is lower.

These test methods have been deemed to be safe throughout the world.
Pressure is measured at the case mouth or from inside the case according to the CIP.

DO NOT ATTEMPT ANY EXTRAPOLATIONS. PLEASE FOLLOW THE DATA AS WRITTEN.
IT IS A MUST FOR EVERY RELOADER TO READ THE RELOADING SAFETY RULES ON THE PAGES 16 AND 17 OF THIS GUIDE.

7 mm TCU

Test barrel:	360 mm (14"), 1 in 10" twist						
Primers:	Small Rifle						
Cases:	Necked-up Lapua .223 Rem., trim-to length 44,50 mm (1.752")						

Bullet				Powder	Starting load		Maximum load								
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity							
[g]	[grs]		[mm]	[in.]	[g]	[grs]	[m/s]	[fps]							
6,5	100	Hornady	HP		62,5	2.461	N120	1,48	22.8	667	2188	1,64	25.3	744	2441
							N130	1,62	25.0	672	2205	1,79	27.6	753	2470
							N133	1,77	27.3	695	2280	1,96	30.2	774	2539
7,8	120	Hornady	SSSP		63,5	2.500	N120	1,32	20.4	606	1988	1,45	22.4	655	2149
							N130	1,45	22.4	610	2001	1,61	24.8	673	2208
							N133	1,62	25.0	630	2067	1,81	27.9	701	2300
8,4	130	Speer	Spitzer		65,0	2.559	N120	1,24	19.1	542	1778	1,38	21.3	596	1955
							N130	1,40	21.6	573	1880	1,55	23.9	626	2054
							N133	1,46	22.5	576	1890	1,62	25.0	633	2077
9,7	150	Sierra	SBT		65,0	2.559	N120	1,17	18.1	513	1683	1,30	20.1	562	1844
							N130	1,31	20.2	535	1755	1,45	22.4	586	1923
							N133	1,38	21.3	542	1778	1,53	23.6	599	1965
							N135	1,44	22.2	538	1765	1,60	24.7	597	1959
10,4	160	Sierra	SBT		66,0	2.598	N120	1,12	17.3	480	1575	1,25	19.3	531	1742
							N130	1,26	19.4	505	1657	1,41			

7 mm BR Remington

Test barrel:	375 mm (14½"), 1 in 10" twist
Primers:	Small Rifle
Cases:	Remington, trim-to length 38,40 mm (1.512")

Bullet					Powder		Starting load				Maximum load					
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity				
[g]	[grs]			[mm]	[in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]		
6,5	100	Hornady	HP	56,0	2.205	N120	1,82	28.0	774	2539	1,93	29.8	829	2720		
						N130	1,97	30.5	783	2568	2,10	32.4	838	2749		
7,8	120	Hornady	SSSP	56,6	2.228	N120	1,67	25.8	687	2255	1,80	27.8	738	2421		
						N130	1,81	27.9	707	2318	1,94	29.9	784	2572		
						N133	1,94	30.0	714	2343	2,11	32.6	771	2530		
9,1	140	Nosler	Ballistic Tip	60,3	2.374	N120	1,45	22.4	595	1954	1,58	24.4	640	2100		
						N130	1,62	25.0	612	2006	1,73	26.7	661	2169		
						N133	1,71	26.3	623	2044	1,84	28.4	671	2201		
9,7	150	Nosler	Ballistic Tip	60,3	2.374	N120	1,42	21.9	576	1890	1,54	23.8	619	2031		
						N130	1,54	23.8	589	1931	1,67	25.8	635	2083		
						N133	1,62	25.1	595	1952	1,77	27.3	642	2106		
10,4	160	Sierra	HPBT	59,7	2.350	N120	1,30	20.1	539	1770	1,42	21.9	580	1903		
						N130	1,42	21.9	559	1834	1,55	23.9	602	1975		
						N133	1,56	24.1	575	1886	1,69	26.1	619	2031		
						N135	1,67	25.8	588	1929	1,79	27.6	630	2067		

7 mm GJW

Test barrel:	380 mm (15"), 1 in 8" twist
Primers:	Small Rifle
Cases:	Munitionsfabrik Thun, trim-to length 48,80 mm (1.920")

Bullet					Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s] [fps]		[g]	[grs]	[m/s]	[fps]	
9,7	150	Nosler	Ballistic Tip	75,0	2.953	N130	1,58	24.4	613	2013	1,67	25.8	642	2106
						N133	1,65	25.5	614	2013	1,74	26.8	644	2113
						N135	1,78	27.5	629	2065	1,86	28.7	658	2159
10,9	168	Sierra	HPBT	75,0	2.953	N130	1,54	23.7	583	1913	1,63	25.2	611	2005
						N133	1,62	25.1	587	1927	1,71	26.4	617	2024
						N135	1,76	27.1	605	1984	1,83	28.2	631	2070
						N140	1,83	28.2	607	1991	1,91	29.5	636	2087

7.62 x 25 Tokarev

Test barrel:	150 mm (6"), 1 in 10" twist
Primers:	Large Pistol
Cases:	Fiocchi 7,63 Mauser, trim-to length 24,80 mm (0.976")

NOTE: FOR FIREARMS CHAMBERED FOR THE 7.62 x 25 TOKAREV CARTRIDGE ONLY.

Bullet				Powder		Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.		Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm]	[in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
3,9	60	Speer	HP ²⁾	32,0	1.260	N320	0,29	4.4	391	1284	0,36	5.5	480	1574
						N340	0,39	5.9	434	1425	0,46	7.1	522	1713
4,6	71	Sierra	FMJ ²⁾	33,0	1.299	N340	0,36	5.5	410	1345	0,43	6.7	478	1569
						3N37	0,39	6.0	412	1352	0,49	7.6	493	1616
						3N38	0,53	8.1	471	1546	0,61	9.5	521	1708
4,8	74	Lapua	FMJ ¹⁾	33,0	1.299	N340	0,35	5.5	406	1331	0,43	6.6	471	1546
						3N37	0,39	5.9	403	1322	0,49	7.6	478	1569
5,8	90	Sierra	JHC ²⁾	32,5	1.280	N340	0,29	4.5	308	1011	0,37	5.7	405	1329
						3N37	0,34	5.2	340	1116	0,43	6.6	416	1366

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

7,62 x 25 Tokarev

cont

Bullet					Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
					3N38	0,46	7.1	404	1326	0,53	8.1	452	1482	
6,0	93	Lapua	FMJ ¹⁾	34,0	1.339	N340	0,31	4.7	342	1122	0,39	5.9	401	1316
					3N37	0,33	5.1	349	1146	0,46	7.1	418	1370	
					3N38	0,43	6.6	378	1241	0,56	8.6	445	1460	

¹⁾ Bullet cal. 7,84 mm (0,309") ²⁾ Bullet cal. 7,92 mm (0,312")

.32 S&W Long N.P.

Test barrel:	175 mm (7"), 1 in 18½" twist
Primers:	Small Pistol
Cases:	Lapua, trim-to length 23,20 mm (0.913")

Bullet					Powder		Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity			
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]		
5,4	83	Lapua	LWC	24,6	0,969	N310	0,09	1.4	231	758	0,11	1.7	258	846	
6,4	98	Lapua	LRN	32,3	1.272	N310	0,12	1.9	256	840	0,14	2.2	277	909	
6,4	98	Lapua	LWC	24,6	0,969	N310	0,07	1.1	186	610	0,08	1.2	208	682	

.32 S&W Long Wadcutter

Test barrel:	150 mm (6"), 1 in 18%" twist
Primers:	Small Pistol
Cases:	Lapua, trim-to length 23,20 mm (0.913")

Bullet					Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
5,4	83	Lapua	LWC	24,6	0,969	N310	0,11	1,7	246	807	0,13	2,0	286	938
6,4	98	Lapua	LWC	24,6	0,969	N310	0,09	1,4	233	764	0,12	1,9	257	843

9 mm Browning court / .380 Auto

Test barrel:	82 mm (3"), 1 in 10" twist
Primers:	Small Pistol
Cases:	X-Treme Bullets, trim-to length 17.15 mm (0.680")

Bullet						Powder	Starting load				Maximum load			
Weight		Mfg	Type/Name	C.O.L.		Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm]	[in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
5,8	90	Sig Sauer	V-Crown JHP	25,0	0.984	N310	0,16	2.5	277	909	0,18	2.8	293	961
						N320	0,21	3.2	270	886	0,23	3.5	308	1010
5,9	90	Hornady	HP-XTP	24,9	0.980	N310	0,14	2.1	246	807	0,17	2.6	290	951
						N320	0,20	3.1	266	873	0,23	3.6	319	1047
6,2	95	Speer	TMJ	25,0	0.984	N310	0,15	2.3	249	817	0,17	2.6	282	925
						N320	0,21	3.2	265	869	0,23	3.5	309	1014
6,5	100	Berry's	HBRN	25,0	0.984	N310	0,14	2.2	218	715	0,16	2.5	251	823
						N320	0,19	2.9	250	820	0,22	3.4	298	978
6,5	100	Berry's	Hybrid Hollow Point	25,0	0.984	N310	0,14	2.2	209	686	0,17	2.6	257	843
						N320	0,19	2.9	241	791	0,22	3.4	292	958
6,5	100	H&N	HP HS	25,0	0.984	N310	0,13	2.0	232	761	0,15	2.2	267	876
						N320	0,18	2.8	253	830	0,21	3.2	300	984
6,5	100	Hornady	FMJ	25,0	0.984	N310	0,13	2.0	232	761	0,16	2.4	270	886
						N320	0,18	2.7	243	797	0,21	3.2	296	971
6,5	100	Hornady	FMJ	25,0	0.984	N310	0,21	3.2	243	797	0,25	3.9	306	1004

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

9 mm Browning court / .380 Auto

cont.

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
6,5	100	X-Treme Bullets	RNFP	24,3	0,957	N310	0,14	2,2	247	810	0,17	2,6	273	896
						N320	0,18	2,8	248	814	0,22	3,3	297	974
						N32C	0,18	2,7	239	784	0,22	3,4	280	919

9 mm Luger / 9x19 mm

Test barrel:	100 mm (4"), 1 in 10" twist
Primers:	Small Pistol
Cases:	Lapua, trim-to length 19,00 mm (0.748")

Bullet				Powder	Starting load		Maximum load							
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity					
[g]	[grs]			[mm]	[in.]	[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
5,8	90	Hornady	HP-XTP	27,0	1,063	N310	0,26	3,9	369	1212	0,27	4,2	384	1260
						N320	0,31	4,8	401	1316	0,34	5,3	421	1380
						N330	0,36	5,6	420	1379	0,39	6,1	439	1440
						N340	0,36	5,5	423	1387	0,40	6,2	452	1483
						N350	0,42	6,4	424	1391	0,47	7,2	456	1496
						3N37	0,42	6,4	437	1434	0,47	7,2	461	1512
				28,0	1,102	N310	0,21	3,2	325	1066	0,25	3,9	373	1224
						N320	0,27	4,2	355	1165	0,31	4,8	401	1316
						N330	0,32	4,9	370	1214	0,37	5,6	421	1381
6,5	100	H&N	HP HS			N340	0,31	4,8	372	1220	0,37	5,7	426	1398
						3N37	0,42	6,4	398	1306	0,47	7,3	434	1423
				28,6	1,126	N320	0,18	2,8	264	866	0,22	3,4	308	1010
						N340	0,22	3,5	279	915	0,27	4,1	327	1073
						3N37	0,27	4,2	291	955	0,31	4,8	333	1093
6,5	100	Speer	HP	27,5	1,083	N320	0,30	4,7	373	1222	0,33	5,1	398	1307
						N330	0,35	5,4	393	1290	0,38	5,9	416	1365
						N340	0,37	5,7	393	1290	0,42	6,4	429	1407
						3N37	0,42	6,4	398	1306	0,47	7,3	434	1423
						N350	0,42	6,4	398	1306	0,47	7,3	434	1423
7,5	115	Barnes	TAC-XP	28,6	1,126	N320	0,18	2,8	264	866	0,22	3,4	308	1010
						N340	0,22	3,5	279	915	0,27	4,1	327	1073
						3N37	0,27	4,2	291	955	0,31	4,8	333	1093
						N350	0,32	4,9	284	932	0,41C	6,3C	343	1125
				29,0	1,142	N320	0,27	4,1	319	1047	0,30	4,7	361	1184
7,5	115	Berry's	HB RN TP			N330	0,31	4,8	334	1096	0,37	5,7	384	1260
						N340	0,32	5,0	279	915	0,37	5,8	388	1273
						3N37	0,36	5,6	341	1119	0,44	6,7	396	1299
						N350	0,47	7,2	360	1181	0,56C	8,7C	427	1401
				29,0	1,142	N320	0,26	4,0	341	1118	0,29	4,5	362	1188
7,5	115	Hornady	HP-XTP			N330	0,31	4,8	356	1166	0,35	5,4	381	1251
						N340	0,34	5,2	365	1198	0,38	5,9	397	1301
						N350	0,38	5,9	373	1225	0,42	6,4	396	1299
						3N37	0,39	6,0	370	1214	0,44	6,7	398	1305
				29,0	1,142	N320	0,25	3,9	304	997	0,29	4,5	341	1119
7,5	115	Lapua	FMJ-RN			N330	0,29	4,5	328	1076	0,35	5,4	374	1227
						N340	0,31	4,8	344	1129	0,35	5,4	372	1220
						N350	0,35	5,4	344	1129	0,42	6,5	394	1293
						3N37	0,36	5,6	344	1129	0,42	6,5	393	1289
				26,3	1,035	N320	0,22	3,4	280	919	0,26	4,0	326	1070
7,5	115	Sierra	JHP			N330	0,26	4,0	300	984	0,32	4,9	359	1178
						N340	0,26	4,0	300	984	0,32	4,9	359	1178
						3N37	0,32	4,9	321	1053	0,42	6,5	378	1240
						N350	0,35	5,4	321	1053	0,42	6,5	378	1240
				29,0	1,142	N320	0,25	3,9	298	978	0,30	4,6	346	1135
7,5	115	X-Treme	RN HPCB			N330	0,30	4,6	316	1037	0,35	5,4	364	1194
						N340	0,30	4,6	315	1033	0,36	5,6	370	1214
						N350	0,33	5,1	320	1050	0,40	6,2	378	1240
						3N37	0,35	5,4	321	1053	0,42	6,5	378	1240

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

9 mm Luger / 9x19 mm

cont.

Bullet				Powder	Starting load		Maximum load						
Weight		Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity				
[g]	[grs]</th												

9 mm Luger / 9x19 mm

cont.

Bullet				Powder	Starting load		Maximum load							
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity						
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
				N330	0,23	3.5	267	876	0,27	4.2	308	1010		
				N340	0,23	3.5	274	899	0,26	4.0	301	988		
				N350	0,25	3.9	272	892	0,30	4.6	316	1037		
				3N37	0,27	4.2	271	889	0,32	4.9	317	1040		
9,4	145	H&N	RN	29,0	1.142	N310	0,17	2.6	242	794	0,21	3.3	279	915
				N320	0,20	3.1	253	830	0,24	3.8	295	968		
				N330	0,26	4.0	283	928	0,30	4.6	322	1056		
				N340	0,27	4.1	288	945	0,31	4.7	322	1056		
9,5	147	Berry's	Hybrid Hollow Point	27,5	1.083	N320	0,18	2.8	235	771	0,22	3.4	276	906
				N330	0,22	3.4	253	830	0,26	4.0	292	958		
				N340	0,22	3.4	256	840	0,26	4.0	293	961		
				3N37	0,26	4.0	252	827	0,32	4.9	305	1001		
9,5	147	Hornady	HP/XTP	29,0	1.142	N320	0,20	3.1	239	784	0,25	3.9	298	978
				N330	0,25	3.9	294	964	0,28	4.3	315	1032		
				N340	0,25	3.9	289	948	0,28	4.3	309	1015		
				N350	0,29	4.5	302	991	0,32	5.0	326	1070		
				3N37	0,30	4.7	298	979	0,33	5.1	321	1052		
				N338	0,41	6.3	357	1171	0,45	6.9	368	1207		
				N105	0,40	6.1	317	1039	0,41	6.4	338	1108		
9,5	147	X-Treme Bullets	RN Heavy Plate	29,4	1.157	N310	0,15	2.3	209	686	0,18	2.8	249	817
				N320	0,20	3.1	247	810	0,24	3.7	289	948		
				N330	0,24	3.6	262	860	0,28	4.4	308	1010		
				N340	0,25	3.8	263	863	0,29	4.5	309	1014		
9,7	150	Lapua	CEPP	28,7	1.130	N330	0,23	3.5	264	867	0,24	3.8	283	929
				N340	0,24	3.8	275	903	0,27	4.1	294	966		
				N350	0,27	4.2	285	936	0,30	4.6	304	997		
				3N37	0,27	4.2	275	904	0,30	4.7	298	976		
10,7	165	X-Treme Bullets	RN Copper Plated HP	28,7	1.130	N320	0,17	2.6	211	692	0,20	3.1	250	820
				N330	0,19	3.0	224	735	0,23	3.5	264	866		
				N340	0,20	3.0	227	745	0,23	3.6	265	869		
				N350	0,22	3.4	233	764	0,26	4.0	275	902		
				3N37	0,23	3.5	234	768	0,28	4.3	277	909		
				N338	0,28	4.4	246	807	0,35	5.4	299	981		
				N105	0,33	5.1	272	892	0,39	6.0	311	1020		

C = Compressed load

9 x 23 Winchester

Test barrel: 130 mm (5"), 1 in 16" twist

Primers: Small Pistol

Cases: Winchester, trim-to length 22,75 mm (0.896")

Bullet				Powder	Starting load		Maximum load							
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity						
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
7,5	115	Sierra	FMJ	32,5	1.280	N340	0,41	6.3	425	1395	0,46	7.2	449	1474
				N350	0,48	7.4	419	1374	0,57	8.8	456	1496		
				3N37	0,47	7.3	424	1392	0,54	8.3	462	1517		
8,0	123	Lapua	FMJ	32,5	1.280	N340	0,38	5.9	384	1261	0,45	6.9	422	1385
				N350	0,45	6.9	388	1272	0,50	7.8	425	1394		
				3N37	0,43	6.6	397	1302	0,48	7.5	427	1400		

NOTE: This cartridge is not supported by CIP or SAAMI. The maximum loads do not exceed 300 MPa.

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!

LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.357 SIG

Test barrel: 130 mm (5"), 1 in 16" twist

Primers: Small Pistol

Cases: Starline, trim-to length 21,80 mm (0.858")

Bullet				Powder	Starting load		Maximum load							
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity						
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
6,2	95	Sierra	FMJ	28,9	1.140	N340	0,51	7.8	461	1512	0,58	8.9	504	1652
				N350	0,57	8.8	469	1537	0,66	10.1	518	1699		
7,5	115	Sierra	FMJ	28,9	1.140	N340	0,41	6.3	404	1325	0,50	7.7	449	1473
				N350	0,47	7.3	411	1347	0,56	8.6	460	1509		
8,0	123	Lapua	FMJ-RN	28,9	1.140	N340	0,39	6.0	381	1250	0,48	7.4	426	1398
				N350	0,47	7.2	394	1293	0,54	8.3	439	1440		
				3N37	0,47	7.2	392	1287	0,54	8.3	436	1431		

.38 Super Auto

Test barrel: 140 mm (5½"), 1 in 16" twist

Primers: Small Pistol

Cases: Remington +P, trim-to length 22,70 mm (0.893")

Bullet				Powder	Starting load		Maximum load							
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity						
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
7,5	115	Hornady	HP-XTP	31,5	1.240	N320	0,33	5.1	362	1188	0,36	5.5	382	1253
				N340	0,39	6.0	381	1250	0,42	6.5	404	1324		
				N350	0,36	5.6	357	1171	0,41	6.3	386	1266		
				3N37	0,42	6.5	385	1263	0,47	7.2	411	1347		
7,5	115	Lapua	FMJ	31,5	1.240	N330	0,34	5.2	350	1148	0,39	6.1	394	1294
7,5	115	Sierra	FMJ	32,4	1.276	N350	0,51	7.9	414	1358	0,55	8.5	439	1439
				3N37	0,48	7.4	395	1296	0,51	7.9	419	1375		
8,0	123	Lapua	FMJ	31,5	1.240	N330	0,32							

.38 Special

Test barrel:	170 mm (6½"), 1 in 18" twist
Primers:	Small Pistol
Cases:	Lapua, trim-to length 29,10 mm (1.146")

Bullet				Powder		Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.		Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm]	[in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
5,5	85	H&N	WC H-HB	29,5	1.161	N310	0,22	3.4	277	909	0,30	4.6	351	1152
						N320	0,30	4.6	283	928	0,36	5.6	357	1171
						N32C	0,29	4.5	281	922	0,38	5.9	324	1063
7,1	110	Hornady	HP/XTP	36,5	1.437	N320	0,35	5.4	342	1120	0,40	6.1	388	1272
						N340	0,40	6.2	345	1130	0,45	6.9	386	1267
						N350	0,43	6.6	355	1165	0,50	7.7	398	1305
						3N37	0,48	7.3	353	1156	0,53	8.2	399	1308
						N340	0,42	6.5	344	1129	0,47	7.2	393	1289
8,1	125	Berry´s	Flat Point	38,0	1.496	N310	0,31	4.7	283	928	0,36	5.5	345	1132
						N320	0,35	5.4	317	1040	0,41	6.3	375	1230
						N32C	0,51	7.8	333	1093	0,53	8.2	343	1125
						N340	0,42	6.5	344	1129	0,47	7.2	393	1289
						N340	0,38	5.8	318	1042	0,43	6.7	359	1178
8,1	125	Hornady	FP/XTP	36,5	1.437	N320	0,32	4.9	299	981	0,37	5.6	342	1121
						N340	0,42	6.5	323	1058	0,49	7.5	373	1224
						N350	0,42	6.5	323	1058	0,49	7.5	367	1204
						3N37	0,44	6.8	319	1045	0,49	7.5	341	1117
						N340	0,40	6.2	282	925	0,45	6.9	336	1102
9,1	140	Speer	HP	36,5	1.437	N320	0,30	4.6	268	878	0,35	5.3	320	1051
						N340	0,36	5.6	275	902	0,41	6.2	329	1079
						N350	0,40	6.2	282	925	0,45	6.9	336	1102
						3N37	0,41	6.2	282	925	0,46	7.1	341	1117
						N340	0,34	5.2	265	869	0,39	5.9	308	1010
9,5	146	Speer	JHP	35,0	1.378	N340	0,30	4.6	261	856	0,35	5.4	306	1004
						N350	0,34	5.2	265	869	0,39	5.9	308	1018
						3N37	0,35	5.4	263	863	0,40	6.1	310	1018
						N340	0,28	4.3	242	794	0,31	4.7	274	899
						N340	0,29	4.5	258	846	0,32	4.9	305	1001
9,6	148	Berry´s	Double End WC	29,5	1.161	N310	0,19	2.9	172	564	0,22	3.4	233	764
						N320	0,24	3.7	230	755	0,27	4.2	284	932
						N32C	0,28	4.3	242	794	0,31	4.7	274	899
						N340	0,29	4.5	258	846	0,32	4.9	305	1001
						N350	0,27	4.1	255	835	0,30	4.6	294	964
10,2	158	Berry´s	Flat Point	39,0	1.535	N310	0,25	3.9	213	699	0,29	4.4	272	892
						N320	0,35	5.4	273	896	0,38	5.8	317	1040
						N340	0,39	6.0	289	948	0,44	6.8	332	1089
						N330	0,22	3.3	239	784	0,25	3.8	277	910
						N340	0,24	3.6	248	812	0,27	4.1	282	926
10,2	158	Sako	LWC	30,0	1.181	N320	0,20	3.0	237	776	0,23	3.5	267	876
						N330	0,22	3.3	239	784	0,25	3.8	277	910
						N340	0,24	3.6	248	812	0,27	4.1	282	926
						N350	0,27	4.1	255	835	0,30	4.6	294	964
						N350	0,27	4.1	255	835	0,30	4.6	294	964
10,2	158	Berry´s	Flat Point	39,0	1.535	N310	0,25	3.9	213	699	0,29	4.4	272	892
						N320	0,35	5.4	273	896	0,38	5.8	317	1040
						N340	0,39	6.0	289	948	0,44	6.8	332	1089
						N330	0,34	5.2	290	951	0,38	5.9	322	1056
						N340	0,35	5.4	291	955	0,39	6.0	329	1079
10,2	158	H&N	SWC	36,5	1.437	N310	0,22	3.3	239	784	0,25	3.8	269	883
						N320	0,30	4.6	270	886	0,33	5.0	309	1014
						N340	0,34	5.3	289	948	0,39	6.0	333	1093
						3N37	0,40	6,1	267	876	0,43	6.7	320	1050
						N340	0,29	4.5	244	801	0,33	5.1	293	961
10,2	158	Hornady	HP/XTP	36,6	1.441	N310	0,24	3.7	210	689	0,26	4.1	244	801
						N320	0,34	5.2	264	866	0,32	4.9	296	971
						N340	0,34	5.3	289	948	0,39	6.0	329	1079
						3N37	0,40	6,1	267	876	0,43	6.7	320	1050
						N340	0,34	5.3	289	948	0,39	6.0	329	1079
10,2	158	LOS	Flat Point	39,3	1.547	N310	0,28	4.4	187	614	0,32	4.9	254	833
						N320	0,34	5.2	264	866	0,39	6.0	313	1027
						N330	0,38	5.8	279	915	0,42	6.5	325	1066
						N340	0,39	6.0	282	925	0,43	6.7	329	1079
						3N37	0,47	7.2	275	902	0,50	7.8	340	1115
10,2	158	Speer	HP	36,5	1.437	N320	0,25	3.9	218	715	0,30	4.6	272	892
						N340	0,32	4.9	241	791	0,37	5.6	300	983

.38 Special

cont

Bullet						Powder	Starting load				Maximum load			
Weight		Mfg	Type/Name	C.O.L.		Type	Weight		Velocity		Weight		Velocity	
[g]	[grs]			[mm]	[in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
						N350	0,36	5.5	261	855	0,41	6.3	309	1013
						3N37	0,38	5.9	259	848	0,43	6.6	305	999
10,2	158	X-Treme Bullets	SWC CP	36,5	1.437	N310	0,22	3.4	206	676	0,25	3.9	265	869
						N320	0,29	4.4	263	863	0,33	5.2	304	997
						N32C	0,35	5.4	266	873	0,39	6.0	303	994
						N340	0,36	5.6	287	942	0,39	6.0	325	1066
						3N37	0,42	6.5	302	991	0,45	6.9	334	1096
10,3	158	H&N	LSWC/HP	36,5	1.437	N320*)	0,21	3.3	230	755	0,25	3.8	256	840
						N330*)	0,23	3.6	240	787	0,27	4.1	269	883
11,7	180	H&N	HP HS	39,3	1.547	N310	0,24	3.7	221	725	0,27	4.2	247	810
						N320	0,30	4.6	251	823	0,34	5.2	284	932
						N340	0,34	5.3	261	856	0,38	5.9	301	988
						N350	0,37	5.7	269	883	0,42	6.4	310	1017
						3N37	0,38	5.9	268	879	0,41	6.3	308	1010
11,7	180	LOS	Flat Point	39,3	1.547	N310	0,24	3.8	125	410	0,27	4.2	203	666
						N320	0,29	4.5	222	728	0,33	5.1	265	869
						N340	0,33	5.2	231	758	0,38	5.8	285	935
						N350	0,36	5.6	246	807	0,40	6.2	298	978
						3N37	0,38	5.9	240	787	0,43	6.7	293	961

*) Cowboy Action Shooting load

.357 Magnum

Test barrel: 175 mm (7"), 1 in 18½" twist

Primers: Small Pistol Magnum

Cases: Remington trim-to length 32 60 mm (1 283")

.357 Magnum

cont.

Bullet				Powder	Starting load			Maximum load						
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity	Weight			
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]	[g]			
				3N37	0,46	7.1	350	1148	0,52	8.0	385	1263		
				N105	0,55	8.5	328	1076	0,60	9.3	382	1253		
				N110	0,75	11.6	358	1175	0,80	12.3	383	1257		
10,2	158	CBC	SJSP	40,0	1.575	N320	0,38	5.9	337	1106	0,48	7.3	381	1250
				N340	0,45	6.9	359	1178	0,56	8.6	414	1358		
				N350	0,48	7.4	367	1204	0,61	9.4	428	1404		
				3N37	0,51	7.9	380	1247	0,62	9.6	433	1421		
				N105	0,64	9.8	406	1332	0,81	12.4	472	1549		
				N110	0,91	14.1	436	1430	1,11	17.2	508	1667		
10,2	158	Hornady	FP/XTP	40,0	1.575	N105	0,76	11.7	427	1401	0,80	12.4	447	1466
10,2	158	Hornady	HP/XTP	40,0	1.575	N340	0,46	7.1	359	1178	0,56	8.6	416	1365
				3N38	0,57	8.8	380	1247	0,72	11.1	455	1493		
				N110	0,88	13.5	426	1398	1,06	16.3	499	1637		
10,2	158	Speer	HP	40,0	1.575	N320	0,40	6.2	335	1099	0,43	6.6	354	1160
				N340	0,47	7.3	361	1184	0,50	7.7	378	1239		
				N350	0,54	8.3	385	1263	0,58	8.9	400	1314		
				3N37	0,53	8.2	377	1237	0,57	8.8	398	1305		
				N110	0,98	15.1	451	1480	1,03	15.9	478	1569		
10,3	158		LSWC/HP	40,0	1.575	N330*	0,25	3.9	241	791	0,32	5.0	304	997
				N340*	0,29	4.5	245	804	0,38	5.9	320	1050		
11,7	180	LOS	Copper Plated HP	40,0	1.575	N340	0,41	6.3	321	1053	0,49	7.6	363	1191
				N350	0,44	6.8	328	1076	0,53	8.2	378	1240		
				3N37	0,46	7.2	340	1115	0,56	8.7	388	1273		
				N105	0,60	9.3	370	1214	0,71	10.9	420	1378		
				N110	0,78	12.0	384	1260	0,94	14.6	452	1483		

C = Compressed load F = Full load *) Cowboy Action Shooting load

.357 Remington Maximum

Test barrel: 300 mm (12"), 1 in 18½" twist

Primers: Small Rifle

Cases: Remington, trim-to length 40,60 mm (1.598")

Bullet				Powder	Starting load			Maximum load						
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity	Weight			
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]	[g]			
10,2	158	Hornady	FP/XTP	48,0	1.890	N350	0,64	9.9	443	1453	0,71	10.9	470	1541
				3N37	0,70	10.8	461	1512	0,74	11.3	478	1568		
				N105	0,85	13.1	485	1591	0,92	14.3	513	1683		
				N110	1,21	18.7	557	1827	1,27	19.5	578	1898		
11,7	180	Nosler	Silhouette	48,1	1.894	N105	0,79	12.2	443	1453	0,85	13.1	468	1534
				N110	1,07	16.5	500	1640	1,12	17.3	519	1704		
				N120	1,40	21.6	516	1693	1,46	22.5	537	1762		
13,0	200	Speer	TMJ	50,8 ¹⁾	2.000	N110	0,99	15.3	440	1444	1,04	16.1	460	1508
				N120	1,30	20.1	458	1503	1,36	20.9	483	1584		

1) The cartridge overall length exceeds the CIP maximum.

.40 S&W

Test barrel: 140 mm (5½"), 1 in 16" twist

Primers: Small Pistol

Cases: Remington, trim-to length 21,40 mm (0.843")

Bullet				Powder	Starting load			Maximum load						
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity	Weight			
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]	[g]			
8,7	135	Hornady	HP-XTP	28,6	1.126	N320	0,34	5.2	337	1106	0,35	5.5	346	1134
				N330	0,39	6.0	348	1142	0,40	6.2	357	1172		

.40 S&W

cont.

Bullet				Powder	Starting load			Maximum load						
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity	Weight			
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]	[g]			
				N340	0,39	6.0	345	1132	0,41	6.3	357	1171		
				N350	0,43	6.6	351	1152	0,45	7.0	362	1189		
				3N37	0,47	7.3	357	1171	0,49	7.6	369	1210		
8,7	135	Nosler	HP	28,6	1.126	N320	0,39	6.0	373	1224	0,40	6.2	384	1259
				N340	0,48	7.4	403	1322	0,50	7.8	416	1364		
				3N37	0,54	8.3	403	1322	0,56	8.6	417	1367		
10,7	165	PMC	TC-FMJ	28,6	1.126	N320	0,32	4.9	303	994	0,34	5.2	316	1038
				N340	0,41	6.3	334	1096	0,43	6.6	347	1137		
				3N37	0,47	7.3	343	1125	0,49	7.5	355	1166		
11,0	170	Hornady	HP	28,6	1.126	N340	0,34	5.2	313	1027	0,36	5.6	324	1063
				N350	0,38	5.9	322	1056	0,40	6.2	333	1093		
				3N37	0,39	6.0	322	1056	0,41	6.3	333	1093		
11,7	180	Fiocchi	LTC	28,6	1.126	N320	0,23	3.5	269	883	0,26	4.1	295	968
				N340	0,30	4.6	289	948	0,34	5.2	315	1034		
				3N37	0,35	5.4	289	948	0,39	6.1	320	1049		
11,7	180	Speer	HP	28,6	1.126	N340	0,35	5.4	305	1001	0,37	5.7	316	1037
				N350	0,38	5.9	319	1047	0,40	6.2	329	1078		
13,0	200	Speer	TMJ	28,6	1.126	N340	0,30	4.6	267</					

.41 Remington Magnum					cont.									
Bullet					Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]					[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
13,6	210	Hornady	HP/XTP	40,1	1.579	N350	0,67	10.3	373	1224	0,74	11.4	400	1312
						N105	0,84	13.0	405	1329	0,95	14.6	437	1435
						N110	1,20	18.5	436	1430	1,28	19.8	466	1529

.44 S&W Special

Test barrel:	150 mm (6"), 1 in 18" twist
Primers:	Large Pistol
Cases:	Remington, trim-to length 29,30 mm (1.153")

Booy Action Shooting load

.44 Remington Magnum

Test barrel:	175 mm (7"), 1 in 20" twist
Primers:	Large Pistol
Cases:	Remington, trim-to length 32,40 mm (1.275")

Bullet					Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
11,7	180	Hornady	HP-XTP	40,7	1.602	N320	0,69	10.6	407	1335	0,77	11.8	437	1432
						N340	0,84	13.0	439	1440	0,92	14.1	472	1549
						N350	0,89	13.7	448	1470	0,99	15.3	481	1578
						N105	1,23	19.0	498	1634	1,40	21.6	543	1781
						N110	1,63	25.2	492	1614	1,76	27.1	534	1751
13,0	200	Hornady	HP-XTP	40,7	1.602	N320	0,65	10.0	381	1250	0,73	11.3	408	1339
						N340	0,76	11.7	410	1345	0,84	13.0	437	1434
						N350	0,83	12.8	416	1365	0,95	14.6	453	1487
						3N37	0,89	13.7	433	1421	0,98	15.2	462	1515

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.44 Remington Magnum					cont.									
Bullet					Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]				[mm]	[in.]	[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
					N105	1,09	16.8	459	1506	1,26	19.4	500	1642	
					N110	1,58	24.4	494	1621	1,71	26.3	530	1740	
14,3	220	Sierra	FPJ-Match	40,7	1.602	N320	0,59	9.1	350	1148	0,67	10.4	375	1232
					N340	0,72	11.1	381	1250	0,80	12.3	405	1328	
					N350	0,83	12.8	402	1319	0,96	14.8	439	1441	
					N105	1,08	16.7	432	1417	1,22	18.8	470	1542	
15,6	240	Hornady	JTC-Sil	40,7	1.602	N320	0,58	8.9	331	1086	0,63	9.7	354	1161
					N340	0,67	10.3	358	1175	0,75	11.5	380	1247	
					N350	0,77	11.9	375	1230	0,83	12.8	399	1308	
					3N37	0,78	12.0	372	1220	0,86	13.3	402	1318	
					N105	0,95	14.7	404	1325	1,08	16.6	437	1434	
					N110	1,32	20.4	435	1427	1,43	22.1	470	1541	
16,2	250	Sierra	FPJ-Match	40,7	1.602	N320	0,55	8.5	314	1030	0,63	9.7	344	1130
					N340	0,65	10.0	341	1119	0,73	11.2	370	1213	
					N350	0,75	11.6	366	1201	0,85	13.1	395	1295	
					N105	0,87	13.4	382	1253	1,08	16.7	429	1406	
17,3	267		LFN	40,0	1.575	N340*)	0,38	5.9	224	735	0,49	7.5	288	945
17,3	267		LSWC	40,5	1.681	N32C*)	0,50	7.7	271	889	0,60	9.3	301	988
19,4	300	Hornady	HP-XTP	43,6 ¹⁾	1.717	N340	0,62	9.6	304	997	0,68	10.5	323	1061
					N350	0,68	10.5	315	1033	0,76	11.7	344	1128	
					3N37	0,67	10.3	308	1010	0,74	11.4	336	1102	
					N105	0,85	13.1	349	1145	0,94	14.6	375	1231	
					N110	1,21	18.7	384	1260	1,31	20.2	419	1374	
19,4	300	Sierra	JSP	43,6 ¹⁾	1.717	N340	0,61	9.4	296	971	0,66	10.2	319	1046
					N350	0,64	9.9	296	971	0,72	11.1	326	1071	
					3N37	0,65	10.0	305	1001	0,73	11.2	332	1089	
					N105	0,82	12.7	342	1122	0,90	13.8	368	1208	
					N110	1,15	17.7	369	1211	1,23	19.1	398	1305	

¹⁾ The cartridge overall length exceeds the CIP maximum. *) Cowboy Action Shooting load

.45 Auto / .45 ACP

Test barrel:	127 mm (5"), 1 in 16" twist
Primers:	Large Pistol
Cases:	Remington, trim-to length 22,70 mm (0.893")

Bullet					Powder	Starting load				Maximum load				
Weight		Mfg	Type/Name	C.O.L.	Type	Weight		Velocity		Weight		Velocity		
[g]	[grs]			[mm] [in.]		[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]	
12,0	185	Berry's	Flat Point	28,4	1.118	N310	0,27	4.2	250	820	0,31	4.8	286	938
						N320	0,36	5.6	280	919	0,41	6.3	318	1043
						N330	0,42	6.5	286	938	0,49	7.5	336	1102
						N340	0,43	6.6	288	945	0,50	7.7	335	1099
12,0	185	Berry's	HBRN	32,1	1.264	N310	0,30	4.7	262	860	0,36	5.5	299	981
						N320	0,41	6.3	288	945	0,47	7.3	331	1086
						N32C	0,43	6.6	276	906	0,53	8.2	323	1060
						N330	0,49	7.5	298	978	0,55	8.5	346	1135
						N340	0,49	7.6	298	978	0,56	8.6	348	1142
12,0	185	Berry's	Hybrid Hollow Point	31,0 ³⁾	1.220	N320	0,41	6.3	293	961	0,47	7.3	334	1096
						N340	0,49	7.6	307	1007	0,53	8.2	344	1129
						N350	0,53	8.2	299	981	0,61	9.4	362	1188
						3N37	0,55	8.5	291	955	0,66	10.2	351	1152
12,0	185	H&N	HP	30,0	1.181	N310	0,27	4.2	263	863	0,32	4.9	296	971
						N320	0,37	5.7	283	928	0,44	6.7	328	1076
						N32C	0,39	6.0	279	915	0,47	7.2	319	1047
						N330	0,45	7.0	297	974	0,51	7.9	346	1135

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.45 Auto / .45 ACP

cont.

Bullet				Powder	Starting load		Maximum load					
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity		
[g]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]		
				N340	0,45	6.0	293 961	0,53	8.1	346 1135		
12,0	185	Hornady	HP/XTP	31,2	1.228	N310	0,29	4.4	250 820	0,33	5.2	285 935
				N320	0,39	6.0	284 932	0,45	7.0	326 1070		
				N340	0,46	7.1	297 974	0,53	8.2	345 1132		
				N350	0,50	7.7	292 958	0,59	9.1	354 1161		
				N105	0,79	12.2	317 1040	0,86	13.3	385 1263		
12,7	195	H&N	SWC	31,0	1.220	N310	0,25	3.9	252 827	0,30	4.6	283 928
				N320	0,36	5.5	275 902	0,41	6.3	313 1027		
				N32C	0,36	5.5	266 873	0,42	6.4	299 981		
				N330	0,41	6.3	278 912	0,47	7.3	325 1066		
				N340	0,42	6.5	284 932	0,48	7.4	325 1066		
13,0	200	Berry's	HB Flat Point	29,4	1.157	N310	0,25	3.9	222 728	0,31	4.7	264 866
				N320	0,37	5.6	260 853	0,41	6.4	303 994		
				N330	0,43	6.6	272 892	0,49	7.5	321 1053		
				N340	0,42	6.5	274 899	0,49	7.6	321 1053		
				N350	0,46	7.1	274 899	0,54	8.3	325 1066		
				3N37	0,48	7.4	262 860	0,58	8.9	325 1066		
				3N38	0,59	9.1	274 899	0,67	10.3	331 1086		
13,0	200	Berry's	Hybrid Hollow Point	31,0 ²⁾	1.220	N320	0,38	5.9	272 892	0,44	6.8	318 1043
				N340	0,43	6.6	289 948	0,51	7.9	329 1079		
				N350	0,49	7.6	286 938	0,56	8.6	333 1093		
				3N37	0,51	7.9	266 873	0,62	9.6	334 1096		
13,0	200	H&N	RN	31,0	1.220	N310	0,27	4.2	254 833	0,32	4.9	285 935
				N320	0,37	5.8	274 899	0,43	6.6	315 1033		
				N32C	0,40	6.1	272 892	0,47	7.3	309 1014		
				N330	0,43	6.7	282 925	0,50	7.7	328 1076		
				N340	0,45	6.9	286 938	0,52	8.0	334 1096		
				N350	0,49	7.6	288 945	0,56	8.7	340 1115		
				3N37	0,51	7.9	282 925	0,60	9.3	339 1112		
				3N38	0,62	9.5	286 938	0,73	11.3	353 1158		
13,0	200	H&N	SWC	30,7	1.209	N310	0,26	4.0	251 823	0,30	4.7	283 928
				N320	0,35	5.5	270 886	0,40	6.2	311 1020		
				N32C	0,36	5.5	260 853	0,43	6.7	300 984		
				N330	0,40	6.2	274 899	0,47	7.2	321 1053		
				N340	0,40	6.2	276 906	0,48	7.4	326 1070		
				N350	0,44	6.8	271 889	0,51	7.9	323 1060		
				3N37	0,44	6.8	261 856	0,52	8.0	316 1037		
				3N38	0,57	8.7	272 892	0,66	10.1	334 1096		
13,0	200	Hornady	HAP	31,5	1.240	N310	0,25	3.9	243 797	0,30	4.6	276 906
				N320	0,36	5.5	270 886	0,41	6.3	310 1017		
				N32C	0,36	5.5	260 853	0,44	6.7	300 984		
				N330	0,43	6.6	278 912	0,50	7.7	328 1076		
				N340	0,42	6.5	278 912	0,50	7.7	327 1073		
				N350	0,48	7.4	283 928	0,54	8.4	325 1066		
				3N37	0,49	7.5	274 899	0,58	9.0	335 1099		
				3N38	0,60	9.2	280 919	0,70	10.8	347 1138		
				N105	0,68	10.4	285 935	0,78	12.0	359 1178		
13,0	200	Sig Sauer	V-Crown JHP	31,9	1.256	N320	0,39	6.0	279 915	0,45	6.9	316 1037
				N340	0,46	7.1	293 961	0,52	8.0	329 1079		
				N350	0,51	7.9	287 942	0,57	8.8	335 1099		
				3N37	0,54	8.3	277 909	0,62	9.6	333 1093		
14,6	225	X-Treme Bullets	FB	29,9	1.177	N310	0,22	3.4	191 627	0,27	4.1	231 758
				N320	0,31	4.7	225 738	0,36	5.5	269 883		
				N32C	0,29	4.5	220 722	0,34	5.3	254 833		

GREY TEXT BOX INDICATES MAXIMUM LOAD - USE WITH CAUTION!
LOADS LESS THAN MINIMUM CHARGES SHOWN ARE NOT RECOMMENDED

.45 Auto / .45 ACP

cont.

Bullet				Powder	Starting load		Maximum load					
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity	Weight	Velocity		
[g]			[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]		
				N330	0,37	5.7	246 807	0,42	6.5	286 938		
				N340	0,37	5.7	246 807	0,43	6.6	287 942		
				N350	0,40	6.2	244 801	0,47	7.3	294 965		
				3N37	0,43	6.6	239 784	0,50	7.8	293 961		
				3N38	0,53	8.1	245 804	0,61	9.4	300 984		
				N105	0,58	9.0	249 817	0,68	10.5	317 1040		
14,9	230	Berry's	Hybrid Hollow Point	30,4 ¹⁾	1.197	N320	0,30	4.6	228 748	0,36	5.6	275 902
				N340	0,37	5.7	248 814	0,43	6.6	290 951		
				N350	0,41	6.3	248 814	0,47	7.3	293 961		
				3N37	0,43	6.6	228 748	0,53	8.2	295 968		
14,9	230	Hornady	HP / XTP	31,6 ¹⁾	1.244	N320	0,30	4.6	234 768	0,36	5.6	270 886
				N340	0,36	5.6	238 781	0,42	6.5	284 932		
				N350	0,42	6.5	252 827	0,48	7.4	297 974		
				3N37	0,43	6.6	237 778	0,52	8.0	299 981		
14,9	230	LOS	RN	31,0	1.220	N310	0,23	3.5	217 712	0,27	4.2	248 814
				N320	0,32	4.9	243 797	0,37	5.7	282 925		
				N330	0,37	5.6	249 817	0,43	6.6	294 965		
				N340	0,38	5.8	250 820	0,43	6.6	293 961		
				N350	0,42	6.5	253 830	0,48	7.3	297 974		
				3N37	0,42	6.5	243 797	0,50	7.8	295 968		
				3N38	0,51	7.9	247 810	0,60	9.2	304 997		

¹⁾X-Treme Bullets case ²⁾X-Treme Bullets case ³⁾X-Treme Bullets case



Test barrel: 150 mm (6"), 1 in 16" twist

Primers: Large Pistol

Cases: Remington, trim-to length 32,50 mm (1.279")

Bullet				Powder
--------	--	--	--	--------

.45 Winchester Magnum

Test barrel:	300 mm (12"), 1 in 16" twist						
Primers:	Large Pistol						
Cases:	Winchester, trim-to length 30,30 mm (1.192")						

Bullet				Powder	Starting load		Maximum load							
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity						
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
12,0	185	Hornady	HP/XTP	38,5	1.516	N350	0,81	12.5	451	1478	0,99	15.3	512	1678
				3N37	0,91	14.0	507	1662	1,03	15.9	534	1750		
				N105	1,13	17.4	523	1714	1,33	20.5	576	1888		
13,0	200	Hornady	FMJ-CT	39,5	1.555	N105	1,07	16.5	483	1583	1,23	19.0	532	1744
13,0	200	Speer	TMJ-SWC	38,5	1.516	3N37	0,91	14.0	487	1598	1,00	15.4	513	1683
				N110	1,49	22.9	528	1731	1,64	25.2	575	1885		
14,9	230	Hornady	FMJ-RN	39,5	1.555	3N37	0,82	12.7	410	1344	0,92	14.2	451	1478
				N110	1,41	21.8	495	1622	1,55	23.9	532	1744		
16,2	250	Hornady	HP-XTP	38,2	1.504	N350	0,65	10.0	309	1014	0,78	12.0	373	1224
				3N37	0,75	11.6	354	1160	0,83	12.8	401	1314		
				N105	0,90	13.8	393	1289	1,03	15.8	431	1414		
				N110	1,20	18.4	442	1448	1,37	21.1	481	1576		

.454 Casull

Test barrel:	240 mm (9½"), 1 in 24" twist						
Primers:	Small Rifle						
Cases:	Freedom Arms, trim-to length 33,30 mm (1.311")						

Bullet				Powder	Starting load		Maximum load							
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity						
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
12,0	185	Hornady	HP/XTP ¹⁾	41,7	1.642	N350	1,18	18.2	537	1762	1,39	21.4	593	1946
				3N37	1,14	17.6	531	1742	1,36	21.0	588	1929		
				N105	1,72	26.5	606	1988	1,90	29.3	653	2142		
14,6	225	Speer	HP	42,7	1.681	3N37	1,09	16.8	474	1555	1,27	19.6	523	1716
				N105	1,59	24.5	536	1759	1,73	26.7	580	1903		
				N110	2,00	30.9	566	1857	2,17	33.5	614	2014		
16,2	250	Hornady	HP/XTP	42,8	1.685	3N37	1,01	15.6	437	1434	1,18	18.2	487	1598
				N105	1,39	21.4	481	1578	1,57	24.2	536	1759		
				N110	1,82	28.1	523	1716	1,99	30.7	569	1867		
19,4	300	Speer	Plated HP	44,5	1.752	3N37	0,99	15.3	396	1299	1,10	17.0	433	1421
				N105	1,28	19.8	431	1414	1,49	23.0	484	1588		
				N110	1,71	26.4	474	1555	1,86	28.7	514	1686		

¹⁾The crimping is done over the bullet ogive.

.50 AE

Test barrel:	150 mm (6"), 1 in 19" twist						
Primers:	Large Pistol						
Cases:	Speer, trim-to length 32,50 mm (1.280")						

Bullet				Powder	Starting load		Maximum load							
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity						
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
19,4	300	IMI	JHP	40,0	1.575	N105	1,26	19.4	395	1296	1,38	21.3	436	1430
				N110	1,64	25.3	396	1299	1,86	28.7	456	1496		
				N120	2,11	32.6	363	1191	2,33	36.0	417	1368		
21,1	325	Speer	UCHP	40,0	1.575	N105	1,15	17.7	357	1171	1,26	19.4	406	1332
				N110	1,56	24.1	386	1266	1,75	27.0	437	1434		
				N120	1,99	30.7	348	1142	2,23	34.4	408	1339		

.500 S&W Magnum

Test barrel:	280 mm (11"), 1 in 18" twist						
Primers:	Large Rifle						
Cases:	Starline, trim-to length 41,00 mm (1.614")						

Bullet				Powder	Starting load		Maximum load							
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity	Weight	Velocity						
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s] [fps]				
19,4	300	Speer	TMJ	51,0	2.008	3N38	1,90	29.3	535	1755	2,20	33.9	583	1913
				N105	1,98	30.6	536	1759	2,33	36.0	599	1965		
				N110	2,59	40.0	570	1870	2,95	45.5	652	2139		
22,7	350	Hornady	HP/XTP	50,4	1.984	3N38	1,64	25.3	468	1535	2,00	30.9	537	1762
				N105	1,75	27.0	487	1598	2,02	31.2				

VIHTAVUORI SMOKELESS LOADS FOR COWBOY ACTION SHOOTING

These loads are developed to give the velocities required for the cowboy action shooting using revolvers with lead bullets. The maximum load is determined by the velocity limit about 300 m/s, or by the maximum pressure limit according to the CIP October 1, 1992 rules. The bold text in the tables indicate the maximum load according to CIP pressure level. The maximum loads must never be exceeded.

All the listed loads are intended to be used in modern firearms, which are according to the SAAMI requirements. Please use a competent gunsmith to evaluate that the condition of your gun is adequate to be used with the pressures indicated in the tables. The starting loads are the lowest charges which appeared to give clean burning, i.e. no unburned residues in the barrel or in the case, in our test shooting. This limit may, however vary according to the revolver used.

There are some special features, which must be considered, when using reduced loads like the ones presented in the tables below. The same facts are equally valid always when using any smokeless powder in such loads.

1) Double charges

Some of these loads are so small that throwing the load twice in the same case is possible because of the large case volume. Doubling the charge accidentally causes most probably truly lethal chamber pressures. Therefore, it is a must for everyone using this data to check visually every single load for the double charge before seating the bullet.

2) Free space in the case

When using charges which leave large amount of free space in the case, the shooting characteristics may vary largely depending on where the powder is located in the case. If the powder lies totally in the bottom of the case (i.e. in the end where primer is), the muzzle velocity and especially the maximum pressure become much higher. The maximum pressure may even be doubled when same powder charge is moved from the bullet end to the primer end of the case. This can simply

be demonstrated by shaking the revolver barrel upwards or barrel downwards just before turning it smoothly in horizontal position, aiming and shooting. Also the recoil may transfer the powder in either end of the case. This is sometimes seen as a velocity change between the first shot and the following shots.

The shot to shot deviations in velocity and pressure are normally increased when using load which leaves the cases half empty. For this reason such loads are not recommended for target loads. The data below is tested in a way that the powder is as much as possible in the primer side before firing, and therefore, the pressures and the velocities represent the maximum values which were obtained using our test equipment and cartridge components indicated in the table.

3) Risk for underload detonation

This risk is always present when using highly reduced loads of any smokeless powder. The large free space in the case may generate a pressure wave which can cause, in the worst case, powder to burn as a shock wave, i.e. to detonate, instead of normal fast burning process. The extremely sharp pressure peaks involved in detonation can destroy the weapon and may lead to serious injury.

All these loads given here are extensively pressure tested and no signs of underload detonation were found. We strongly recommend everyone to follow strictly these tables to minimize the risk for underload detonation.

Smokeless powder differs considerably in its burning characteristics from common "black powder". Black powder burns essentially at the same rate in the open (unconfined) as when in a gun. The burning rate of smokeless powder increases with increasing pressure. If burning smokeless powder is confined, gas pressure will rise and eventually can cause the container or chamber to burst. A slight increase in smokeless powder charge after maximum load causes sharp increase in maximum pressure in the chamber. **Never exceed the maximum loads.**

.38 Special

Test barrel:	125 mm (5"), 1 in 18" twist									
Primers:	Small Pistol									
Cases:	Remington, trim-to length 29,10 mm (1.146")									

Bullet				Powder		Starting load				Maximum load			
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity		Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]	[g]	[fps]
9,4	145	LSWC	37,5 1.476	N32C	0,32	4.9	307 1007	0,37	5.7	314	1030		
10,3	158	LSWC/HP	36,5 1.437	N320	0,21	3.3	230 755	0,25	3.8	256	840		
				N330	0,23	3.6	240 787	0,27	4.1	269	883		

.357 Magnum

Test barrel:	150 mm (6"), 1 in 18½" twist									
Primers:	Small Rifle									
Cases:	Remington, trim-to length 32,60 mm (1.283")									

Bullet				Powder		Starting load				Maximum load			
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity		Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]	[g]	[fps]
10,3	158	LSWC/HP	40,0 1.575	N330	0,25	3.9	241 791	0,32	5.0	304	997		
				N340	0,29	4.5	245 804	0,38	5.9	320	1050		

.44 S&W Special

Test barrel:	165 mm (6½"), 1 in 18" twist									
Primers:	Large Pistol									
Cases:	Remington, trim-to length 29,30 mm (1.153")									

Bullet				Powder		Starting load				Maximum load			
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity		Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]	[g]	[fps]
15,6	240	SWC/HP	39,1 1.539	N320	0,30	4.7	214 702	0,38	5.9	260	853		
				N330	0,36	5.5	229 751	0,41	6.3	270	886		
17,3	267	LFN	39,1 1.539	N320	0,25	3.8	193 633	0,34	5.3	242	794		
				N330	0,32	4.9	216 709	0,38	5.9	254	833		
				N340	0,43	6.6	261 856	0,47	7.3	282	925		

.44 Remington Magnum

Test barrel:	175 mm (7"), 1 in 20" twist									
Primers:	Large Pistol									
Cases:	Remington, trim-to length 32,40 mm (1.276")									

Bullet				Powder		Starting load				Maximum load			
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity		Weight	Velocity	Weight	Velocity	Weight	Velocity
[g]	[grs]		[mm] [in.]		[g]	[grs]	[m/s] [fps]	[g]	[grs]	[m/s]	[fps]	[g]	[fps]
17,3	267	LFN	40,0 1.575	N340	0,38	5.9	224 735	0,49	7.5	288	945		
17,3	267	LSWC	40,5 1.681	N32C	0,50	7.7	271 889	0,60	9.3	301	988		

.45 Colt

Test barrel:	150 mm (6"), 1 in 16" twist									
Primers:	Large Pistol									
Cases:	Remington, trim-to length 32,50 mm (1.280")									

Bullet				Powder		Starting load				Maximum load			
Weight	Mfg	Type/Name	C.O.L.	Type	Weight	Velocity							

RELOADING DATA FOR SHOTGUN 12/76 (3")

Lead Shot

Shell: Fiocchi Plastic Green

Shot Load 36 g / 11/4 oz					Starting load				Maximum load			
Powder	Primer	Wad	Overshot card	Crimp	Weight		Velocity		Weight		Velocity	
					[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
N320	Fio. 616	B&P Z2M H-24	Paper	Roll Crimp	1,75	27.0	401	1316	1,82	28.1	411	1348
N340	Fio. 616	B&P Z2M H-24	Paper	Roll Crimp	1,75	27.0	367	1204	2,15	33.2	422	1385
3N37	Fio. 616	B&P Z2M H-24	Paper	Roll Crimp	2,00	30.9	372	1220	2,40	37.0	436	1430

Lead Shot

Shell: Fiocchi Plastic Green

Shot Load 40 g / 13/8 oz					Starting load				Maximum load			
Powder	Primer	Wad	Overshot card	Crimp	Weight		Velocity		Weight		Velocity	
					[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
N320	Fio. 616	B&P Z2M H-21	Paper	Roll Crimp	1,60	24.7	367	1204	1,74	26.9	385	1263
N340	Fio. 616	B&P Z2M H-21	Paper	Roll Crimp	1,85	28.5	378	1240	2,10	32.4	416	1365
3N37	Fio. 616	B&P Z2M H-24	Paper	Roll Crimp	2,00	30.9	363	1191	2,55	39.4	433	1421
N105	Fio. 616	B&P Z2M H-21	Paper	Roll Crimp	2,70	41.7	360	1181	4,01	61.9	521	1709

Lead Shot

Shell: Fiocchi Plastic Green

Shot Load 44 g / 11/2 oz					Starting load				Maximum load			
Powder	Primer	Wad	Overshot card	Crimp	Weight		Velocity		Weight		Velocity	
					[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
N340	Fio. 616	B&P Z2M H-24	Paper	Roll Crimp	1,73	26.7	357	1171	1,90	29.3	379	1243
3N37	Fio. 616	B&P Z2M H-24	Paper	Roll Crimp	2,05	31.6	357	1171	2,50	38.6	418	1371
N105	Fio. 616	B&P Z2M H-24	Paper	Roll Crimp	2,70	41.7	362	1188	3,35	51.7	445	1460

Lead Shot

Shell: Fiocchi Plastic Green

Shot Load 48 g / 15/8 oz					Starting load				Maximum load			
Powder	Primer	Wad	Overshot card	Crimp	Weight		Velocity		Weight		Velocity	
					[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
3N37	Fio. 616	B&P Z2M H-18	Paper	Roll Crimp	1,85	28.5	357	1171	2,36	36.4	397	1302

Steel Shot Nickel Plated

Shell: Fiocchi T4 Plastic

Shot Load 28 g / 1 oz					Starting load				Maximum load			
Powder	Primer	Wad	Overshot card	Crimp	Weight		Velocity		Weight		Velocity	
					[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
N320	Fio. 616	B&P Steel 28	Paper	Roll Crimp	1,20	18.5	358	1175	1,55	23.9	414	1358
N340	Fio. 616	B&P Steel 28	Paper	Roll Crimp	1,60	24.7	366	1201	1,85	28.5	410	1345
3N37	Fio. 616	B&P Steel 28	Paper	Roll Crimp	1,60	24.7	360	1181	1,85	28.5	385	1263
N105	Fio. 616	B&P Steel 28	Paper	Roll Crimp	2,30	35.5	358	1175	3,00	46.3	429	1407

Steel Shot Nickel Plated

Shell: Fiocchi T4 Plastic

Shot Load 32 g / 11/8 oz					Starting load				Maximum load			
Powder	Primer	Wad	Overshot card	Crimp	Weight		Velocity		Weight		Velocity	
					[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
N320	Fio. 616	B&P Steel 32	Paper	Roll Crimp	1,30	20.1	364	1194	1,45	22.4	393	1289
N340	Fio. 616	B&P Steel 32	Paper	Roll Crimp	1,50	23.1	368	1207	1,65	25.5	403	1322
3N37	Fio. 616	B&P Steel 32	Paper	Roll Crimp	1,65	25.5	355	1165	1,95	30.1	416	1365
N105	Fio. 616	B&P Steel 32	Paper	Roll Crimp	2,30	35.5	362	1188	2,59	40.0	415	1362

Steel Shot Nickel Plated

Shell: Fiocchi T4 Plastic

Shot Load 35 g / 11/4 oz					Starting load				Maximum load			
Powder	Primer	Wad	Overshot card	Crimp	Weight		Velocity		Weight		Velocity	
					[g]	[grs]	[m/s]	[fps]	[g]	[grs]	[m/s]	[fps]
N340	Fio. 616	B&P Steel 35	Paper	Roll Crimp	1,40	21.6	364	1194	1,50	23.1	375	1230
3N37	Fio. 616	B&P Steel 35	Paper	Roll Crimp	1,65	25.5	369	1211	1,71	26.4	384	1260
N105	Fio. 616	B&P Steel 35	Paper	Roll Crimp	2,20	34.0	359	1178	2,61	40.3	416	1365

PERSONAL LOADS

PERSONAL LOADS

PERSONAL LOADS

PERSONAL LOADS

MEET THE


VIHTAVUORI TEAM




VIHTAVUORI



Tony Tello



Wayne Campbell



Victor Terblanche



Oliver Milanovic



Dan Pohlabel



Gabrielle 'Gabby' Hendricks



Anastasia 'Nastja' Mustonen




Bruce Piatt




Ian Klemm



Paul Phillips




Gene 'Evil Roy' Pearcey



Halvor Thrane Svendsen




Steve Reiter




Tony Boyer



Paul Hill



Johan Eriksson



Alexander Kreutz

TONY TELLO (USA)

is an accomplished high power and smallbore silhouette rifle as well as Cowboy lever action shooter. He loves all Vihtavuori powders, N130, N133, N135, N140 and N150.

WAYNE CAMPBELL (USA)

is a Hall of Fame and multiple World Team benchrest shooter. He uses, naturally, the Vihtavuori N133 powder.

VICTOR TERBLANCHE (ZAF)

shoots F-Open class and has won back to back South African Championships in 2018 and 2019.

OLIVER MILANOVIC (USA)

is a Palma and Target rifle shooter. Oliver, also known as 'Slink', started out as a pistol shooter, but after trying target rifle at 500 yards in 2010 he never looked back. Oliver's favorite Vihtavuori powder is the N140.

DAN POHLABEL (USA)

competes in F/TR at mid range and long range, and ELR matches like the King of 2 Miles, the NRA mile challenge, and others out to a distance of 2 miles.

GABRIELLE HENDRICKS (USA)

shoots Long-Range, Mid-Range, Across the Course Match Rifle and High Power Rifle. She has been shooting rifles competitively for four years now with great success.

ANASTASIA MUSTONEN (FIN)

shoots IPSC practical handgun and rifle and her favorite Vihtavuori powders are N320 handgun powder and N133 rifle powder.

BRUCE PIATT (USA)

competes in Action Pistol, Tactical 3-Gun, USPSA/ IPSC, Steel Challenge and Sportsman's Team Challenge competitions. He is also a gunsmithing instructor.

IAN KLEMM (USA)

started shooting F-class in 2010 and, has since then excelled in the sport, with top ten results in nearly all F-class US National Championships.

PAUL PHILLIPS (USA)

is a former United States Marine Corp Infantryman and graduated top of his class in FBI sniper school. Paul has set, tied or broken over 45 NRA National Shooting Records. He uses N133 powder and shoots long range.

EVIL ROY (USA)

is a Cowboy Action shooting legend. His favorite powder is the N320 and he uses it for .45 ACP, .45 Colt, 9mm and .38 Special.

HALVOR THRANE SVENSEN (NOR)

is a 200 / 300 m big bore and small bore shooter, and has been using Vihtavuori powders for 15 years. His favorite powder is N150 which he uses to reload his 6.5x55 ammo.

STEVE REITER (USA)

is a legend of his own within bullseye pistol shooting. Through the years, he has competed in free pistol, standard pistol, air pistol and centerfire events as well as rifle.

TONY BOYER (USA)

is widely regarded as the best American short-range benchrest shooter in history. He's been shooting for 40 years, has won several World Championship titles and has been named Shooter of the Year over ten times. Tony relies on his N133 to do the job.

PAUL HILL (GBR)

is an F-Class and FTR shooter using N160 and N165 powders. Paul has been reloading with Vihtavuori powders over twenty years and his ambition is to shoot at the 2021 South Africa World Championships and win.

JOHAN ERIKSSON (SWE)

is a long range and PRS shooter. Of Vihtavuori products, Johan prefers the N100 series because it gives good barrel life and gives him the results he anticipates.

ALEXANDER KREUTZ (GER)

has won numerous German nationals titles in 100 and 300 meter rifle disciplines, and his number one discipline is F-Class. In 2018, he took home the gold at Bisley at the GBFCA European Championships.



PHOTO CHALLENGE WINNER!

Vihtavuori fan wins coveted picture spot on new label

In 2020, Vihtavuori decided to host a photo contest in order to get a new, authentic image to use for our bottle label. We received many excellent submissions, but one picture in particular caught our eye. It was a picture of and by 35-year-old geologist **Alessandro Bertani**, a shooter from a little village in the center of Italy called Bettona.

"I have two main hobbies: photography and shooting at the range. I began shooting about 8 years ago and for 4 years now, I have been part of a tactical sport shooting association called OP.07 Training Division. I go to the range around twice a week to practice and test weapons and gear, or do photography. I've competed only once with a handgun in a local challenge.

I like to shoot rifles, especially sniper rifle. Why? Because I can make the best ammo for my guns myself, and at the range there is no rush and I'm completely relaxed when shooting at 300, 500, 700 meters.

I have been a reloader for seven years, and I use a lot of Vihtavuori products: N340, N120, N130 and N140. I also use Lapua Brass: 7.62x39, 7.62x53, .308win and Lapua bullets: cal. 30 scena 155gr and 168gr."

The story behind the winning photo

"It was a selfie during a training day with op.07 training division on long gun handling at a range near Rome (Bracciano). My friend let me try his new rifle (a Barrett mrad .338 Lapua Magnum). I had never tried an expensive rifle like that before at the time. I'm enthusiastic about winning - I can't wait to see my photo on the Vihtavuori bottle label!"

For more pictures by Alessandro, check out his instagram page @alex.bertani85



EXPERIENCED CRAFTMANSHIP FOR THE PERFECT AMMO

For almost 100 years, Vihtavuori has been known for producing high quality propellants with reliable ballistic performance, long shelf-life and wide variety selection. All of our powders meet the strict requirements of both civilian and military needs.

Vihtavuori powders come in three different series: N100 offers traditional single base propellants for rifle calibers, N300/3N offers porous single base powders and precise measuring capability for pistol cartridges, rimfire ammunition and shotgun shells, and N500 series powders are special high energy rifle propellants enhanced with nitroglycerin for extra ballistic performance.

N100 Reloading Powders for Rifles

	N110	N120	N130	N133	N135	N140	N150	N160	N165	N170	24N41	20N29
Bulk density (g/l)	800	860	870	870	870	910	910	920	920	960	970	960
Energy content (J/g)	3950	3700	3750	3600	3550	3700	3750	3650	3500	3700	3700	3600

N300 Reloading Powders for Handguns

	N310	N320	N32C	N330	N340	N350	3N37	3N38	N105
Bulk density (g/l)	560	550	420	620	620	660	720	730	730
Energy content (J/g)	4100	4100	3050	4100	4100	4100	4100	4000	3950

N500 High Energy Reloading Powders for Rifles

	N530	N540	N550	N555	N560	N565	N568	N570
Bulk density (g/l)	930	940	940	900	960	960	960	960
Energy content (J/g)	3950	4000	3900	3700	4000	4000	3850	4000

Relative burning rate of powder types mentioned above decreases from left to right.

CONSUMER PACKAGE INFORMATION

Consumer package, bottle 0,6 ltr (36.6 in ³) Measures: sides & height 95 x 75 x 140 mm	net weight	gross weight	
N110, N120, N130, N133, N135, N140, N150, N160, N165, N170 24N41, 20N29	1.0 lbs	1.1 lbs	
N530, N540, N550, N555, N560, N565, N568, N570	1.0 lbs	1.1 lbs	
Consumer package, bottle 1,2 ltr (73.2 in ³) Measures: sides & height 95 x 75 x 226 mm	net weight	gross weight	
N110, N120, N130, N133, N135, N140, N150, N160, N165, N170 24N41, 20N29, N530, N540, N550, N555, N560, N565, N568, N570	1,0 kg	1,1 kg	
N310, N320, N32C, N330, N340, N350, 3N37, 3N38, N105	1,0 kg	1,1 kg	
N310, N320, N32C, N330, N340, N350, 3N37, 3N38, N105	0,5 kg	0,6 kg	
N310, N320, N32C, N330, N340, N350, 3N37, 3N38, N105	1,0 lbs	1,2 lbs	
Consumer package, canister 4,5 ltr (274,6 in ³) Measures: sides & height 135 x 189 x 260 mm	net weight	gross weight	
N110, N140, N150, N160	3,5 kg	3,7 kg	
N310, N320, N340, 3N37, 3N38	2,0 kg	2,2 kg	
N110, N120, N130, N133, N135, N140, N150, N160, N165, 24N41, 20N29, N530, N540, N550, N555, N560, N565, N568, N570	8,0 lbs	8,4 lbs	
N310, N320, N330, N340, N350, 3N37, 3N38	4,0 lbs	4,4 lbs	

All Vihtavuori reloading powders are packed into bottles and canisters and further in cardboard boxes.

LOT NUMBER

All Vihtavuori powder bottle labels have a white area with specific information shown in number sequences. The lot information is shown after item number (10). For instance, the lot number in the example picture is 180075.

1.0 lb (0.454 kg) 15.02.2019

(90)F1001(250)180075ARD9768

(11)190215(240)T11955(10)

180075(3103)000454(3303)

000516

(3203)001001(3403)002498



BURNING RATE CHART

Current canister powders in order of approximate burning rate.
This list is for reference only and **not** to be used for developing loads.

	Vihtavuori	Norma	RWS	VECTAN	Reload	Swiss	IMR	Hodgdon	Accurate	W-W	Alliant	Ramshot
Fast Burning								Titewad			E ³	
N310	R1	P805	Ba10				HP38	Nitro 100	WST			
		P801				Trail Boss	Titegroup	Solo 1000	231		Bullseye	
							Clays		452			Competition
N320				RS12	Hi-Skor700X			No. 2	WSL		Red Dot	
N32C			AS		PB	Clays Int'l	SR7625	Solo 1250	473	American Select		
		P804	A1							Promo	Zip	
		P803				Clays Univer.		No. 5	WSF	Green Dot		
N330			Ba9				HS-6		540	Unique		
N340		SP8	RS20		SR4756	CFE Pistol			WAP	Power Pistol		
3N37		A0				Longshot				Silhouette		
N350					Hi-Skor 800X							
3N38		SP2 Pract.	RS24						571	Blue Dot	True Blue	
N105						HS-7		No. 7		Steel		
	R-123		SP3							2400	Enforcer	
		P806			SR4759	H110		No. 9				
N110		R910		RS30	IMR4227	H4198			4100			
			Ba6			Li'l Gun			296			
	200	R901		Tubal2000		H4227		5744		680		
N120					IMR4198				1680		Reloder 7	
		R902							2015			
					IMR3031	Benchmark				Reloder 11		
N130	201		SP10			H322		2230				
N133	202		Tubal3000		8208XBR	CFE 223		BL(C)-2	2460	748	Reloder 10X	
		R903				H335		2495			X-Terminator	
N530			SP9		IMR4895	Leverevolution		2520				
N135			SP7		RS40	IMR4166	H4895		4064		Reloder 12	TAC
					IMR4064							
N140	203B	R907		RS50		IMR4320	Varget					
N540				RS52			H380		2700		Reloder 15	Big Game
N150	URP	R904	Tubal5000				H414			760		
N550				RS60	IMR4350	HYBRID 100V		H4350		4350	Reloder 17	
N555	204		SP11	RS62	IMR4451	H450					Reloder 19	
N160			Tubal7000		IMR4831	H4831SC				785		Hunter
N560	MRP	R905			IMR4955	H4831			3100			
N165	MRP(2)		Tubal8000	RS70	IMR7828SSC	Super-Performance		MagPro		WXR	Reloder 22	
					IMR7828	H1000					Reloder 25	Magnum
N170			SP13	RS76	IMR7977	Retumbo			8700			
N565						H870						
N568				RS80		50BMG						
N570						US869						
24N41												
20N29												
Slow Burning												

AUSTRIA
Rohof Waffenhandel GmbH
Hermannsplatz 17, Postfach 27
AT-2560 Berndorf, Austria
Tel: +43 2672 825 71
Fax: +43 2672 827 673
gerhard.rohrbacher@rohofwaffen.at
www.rohofwaffen.at

GERMANY
Essing Sprengtechnik GmbH
Brückenzaage 8
D-49124 Georgsmarienhütte
Germany
Tel: +49 5401 2026
Fax: +49 5401 2449
info@essing-sprengtechnik.de
www.essing-sprengtechnik.de

LUXEMBOURG
Armurerie Henry Freylinger
Zone Industrielle & Commerciale
L-3378 Livange,
Grand-Duché de Luxembourg
Tel: +352 520 015
Fax: +352 520 010
info@armurerie.lu
www.armurerie.lu

SPAIN
Ardesa S.A.
Camino de Talleris s/n
ES-48170 Zamudio (Vizcaya)
Tel: +34 94 452 0152
Fax: +34 94 452 1372
ardesa@ardesa.com
www.ardesa.com

SOUTH AFRICA
Normark Africa (Pty) Ltd
No. 1489 Zeiss Road
Laser Park Ext. 5
Honeydew, 2040
Republic of South Africa
Tel: +27 (11) 794 6950
info@rapalavmc.co.za
www.rapalasa.co.za

SWEDEN
Frisport AB
Västra Industriegatan 15
SE-782 33 Malung, Sweden
Tel: +46 (0) 31 701 7700
info@frisport.se
www.frisport.se

NORWAY
Skytteprecision AB
Söckenvägen 31
SE-82661 Söderala, Sweden
Tel: +46 270 287 350
Fax: +46 270 287 250
info@skytteprecision.se
www.skytteprecision.se

SWITZERLAND
Grünig & Elmiger
Industriestrasse 22
CH-6102 Malters, Switzerland
Tel: +41 41 499 9040
Fax: +41 41 499 9049
info@gruenel.ch
www.gruenel.ch

UKRAINE
Europe Arm Sport
7 Boulevard Drouzby
01042 KIEV -42, Ukraine
Tel: +380 44 529 95 22
Fax: +380 44 529 70 40
office@ibis-arm.kiev.ua
www.ibis.net.ua

UNITED STATES
Capstone Precision Group
24732 Randall Road
Sedalia, MO 65301 USA
Tel: +1 660 460 2800
sales@capstonepg.com
www.capstonepg.com

PORTUGAL
Cacicamba, S.A.
Zona Industrial do Roligo
Apt 3021 - Espargo
PT-4524-904 S.M.Feira
info@cacicamba.pt
www.cacicamba.pt

SLOVENIA
Artek d.o.o.,
Cankarjeva ulica 10
SI-3272 Rimske Toplice, Slovenia
Tel: +386 3 734 6078
Fax: +386 3 734 6079
info@artek.si
www.artek.si

CANADA
Hirsch Precision Inc.
33 John Wood Road
Lake Echo, NS, B3E 1N1, Canada
Tel: +1 902 829 2932
Fax: +1 902 829 2782
peterdobson@ns.sympatico.ca
www.hirschprecision.com

DENMARK
Leo Nielsen Trading ApS.
Klostermarken 5
DK-9000 Aalborg, Denmark
Tel: +45 98 102909
Fax: +45 98 102940
mail@98102909.dk
www.benelli.dk

ESTONIA
SAYGA Firm LLP
UAB Albatros prekyba
Elektrėnų 1E
LT-51191 KAUNAS
LITHUANIA
+370 699 60 962
deividas@albatros.lt

FINLAND
Nordic Distribution Oy NorDis
P.O. Box 5
FI-62101 Lapua, Finland
Tel: +358 10 5233 600
info@nordis.fi
www.nordis.fi

LATVIA
UAB Albatros prekyba
Elektrėnų 1E
LT-51191 KAUNAS
LITHUANIA
+370 699 60 962
deividas@albatros.lt

FRANCE
B.G.M

15, Route de Meaux - RN3

Le Bois Fleuri

FR-77410 Claye-Souilly, France

Tel: +33 1 60 26 13 07

Fax: +33 1 60 26 14 77

mary@bgmwinfield.com

www.bgmwinfield.com

LITHUANIA

UAB Albatros prekyba

Elektrėnų 1E

LT-51191 KAUNAS

LITHUANIA

+370 699 60 962

deividas@albatros.lt

N568

NEW POWDER!



VIHTAVUORI®

N568 is the ideal choice for today's most popular large capacity magnum cartridges, such as the 6.5 PRC, 300 PRC, .300 Winchester Magnum, and .338 Lapua Magnum.

N568's slow burning characteristics and short-cut grains provide extremely consistent metering for long range competitive shooters, accuracy enthusiasts, and hunters alike. N568 excels with heavy-for-caliber projectiles and provides exceptional temperature stability and is insensitive to humidity changes. An excellent choice for classic belted magnum cartridges such as 7mm Remington Magnum, .300 RUM, .338 Winchester Magnum and more.


For updated information, please follow
vihtavuori.com/powder/
n568-high-energy-powder

CUSTOMER SERVICE

Nammo Vihtavuori Oy
Ruuitehtaantie 80
FI-41330 VIHTAVUORI, Finland



vihtavuori.com/contact-form/

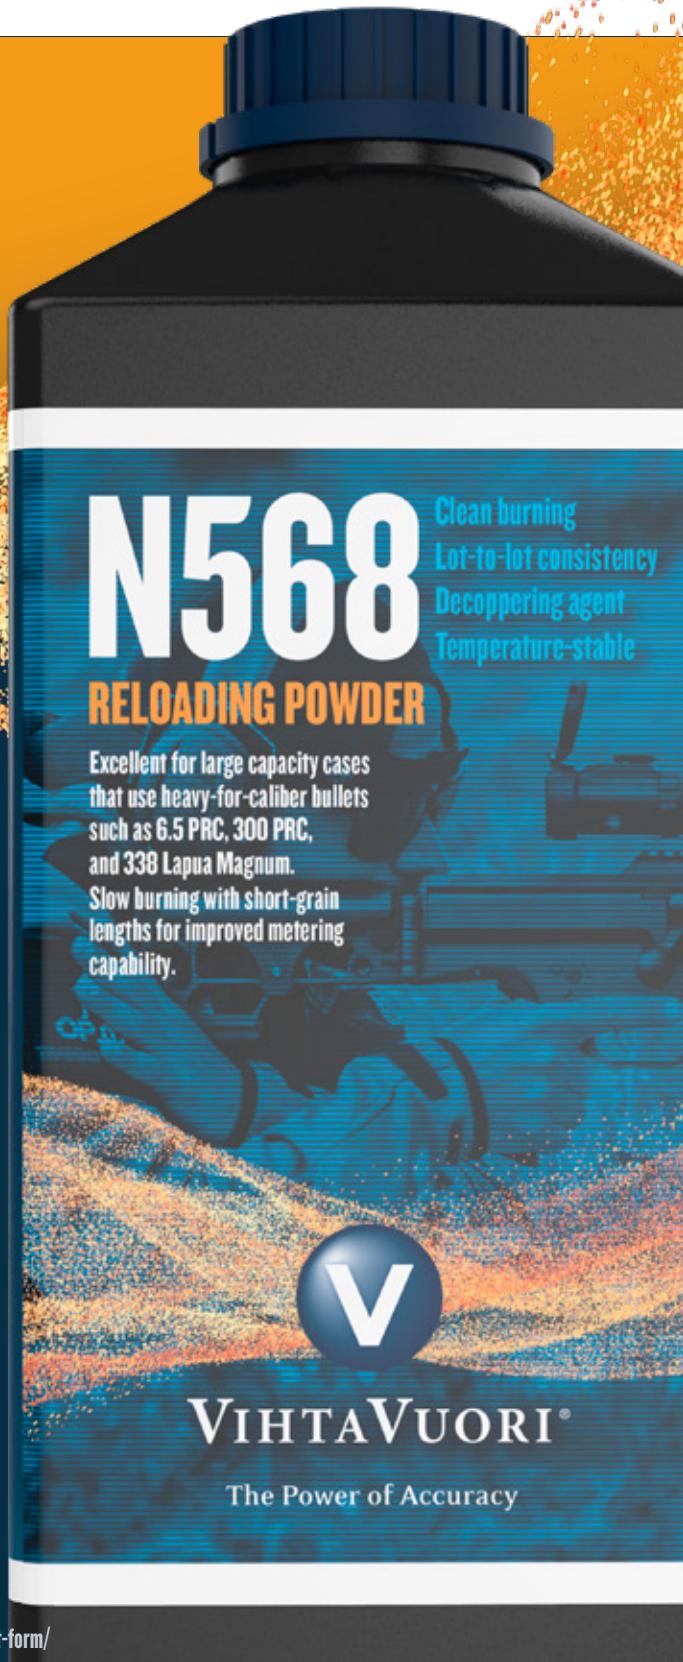

Follow Vihtavuori Powders on Social Media!

